


- Gru a torre a braccio impennabile
- Luffing Jib Tower Crane • Grue à tour à flèche relevable**
- Turmdrehkran mit Steilstellung-Ausleger
- Grúa torre de pluma abatible

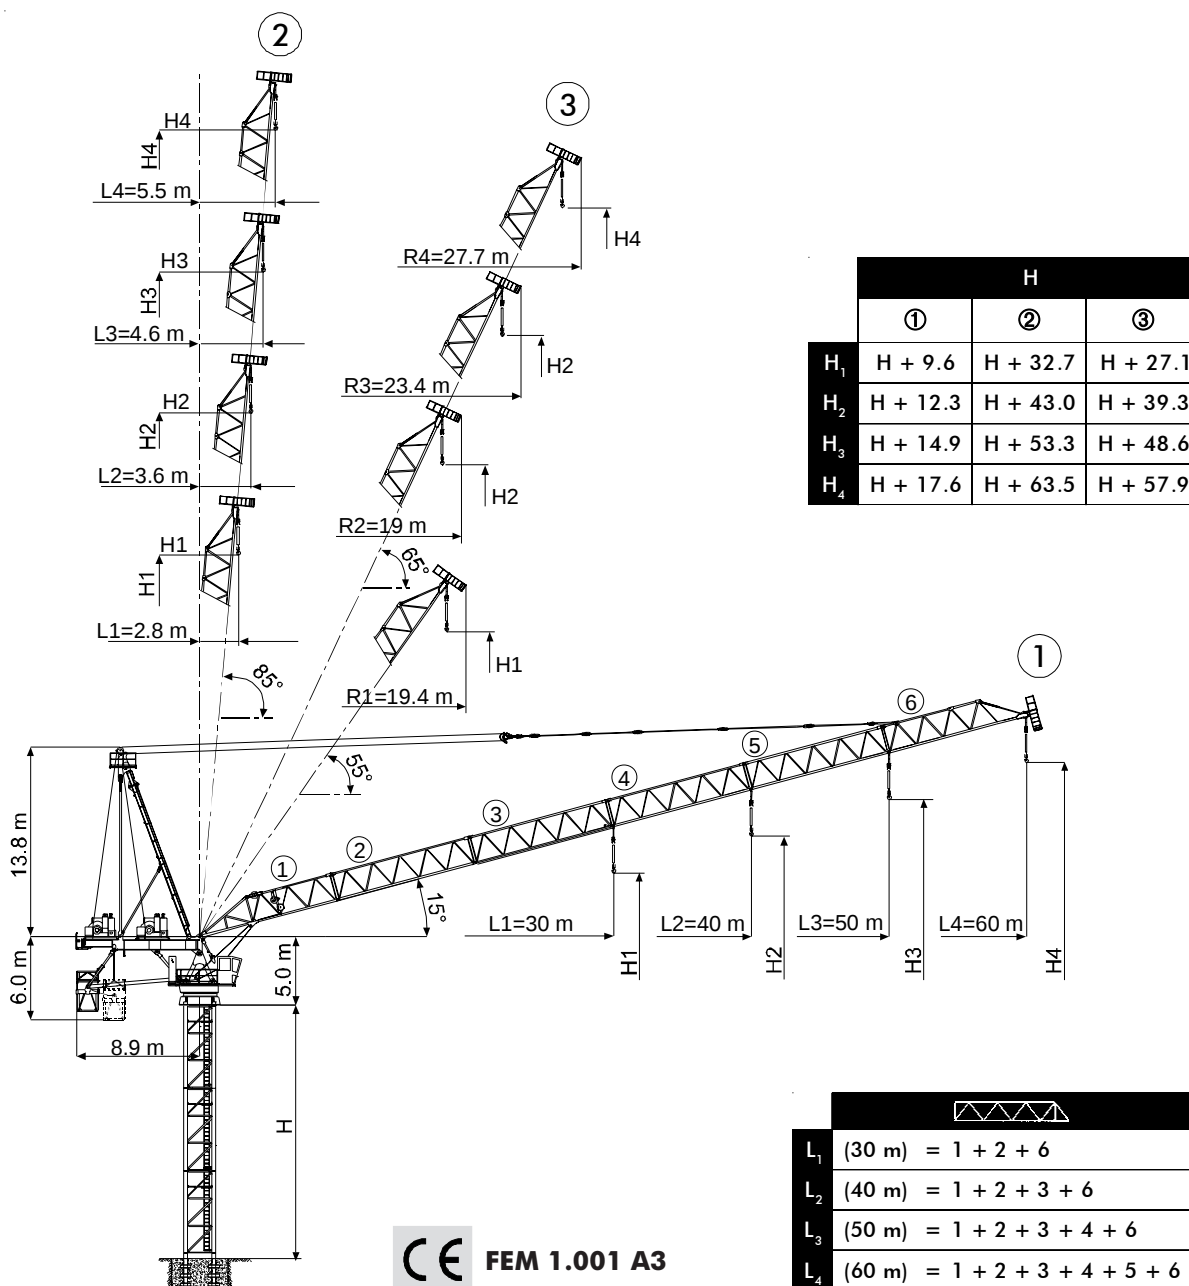

 **FEM 1.001 A3**

Diagramma di portata

I

Load Diagram

GB

Courbes de charges

F

Lastkurven

D

Curvas de cargas

E

CTL 630-24

	m	20	22	25	27	30	35	40	45	50	55	60
12 t - 46 m	t	12	12	12	12	12	12	12	12	11.36	10.29	9.4
12 t - 50 m	t	12	12	12	12	12	12	12	12	12		
24 t - 27 m	t	24	24	24	24	23.33	19.86	17.25	15.22	13.6		
12 t - 40 m	t	12	12	12	12	12	12	12				
24 t - 30 m	t	24	24	24	24	24	20.60	17.90				
12 t - 30 m	t	12	12	12	12	12						
24 t - 30 m	t	24	24	24	24	24						

Altre installazioni

I

Other configurations

GB

Autres implantations


F

Aufstellmöglichkeiten

D

Otras implantaciones

E



i

Gru climbing
Bottom climbing crane
Télescope sur dalles
Kletterkran im Gebäude
Telescopage grúa trepadora

I

GB


F

D

E

	HD 23 26/A
	[m]
A _{min}	
C _{min}	
H _{max}	
x	
y	

i

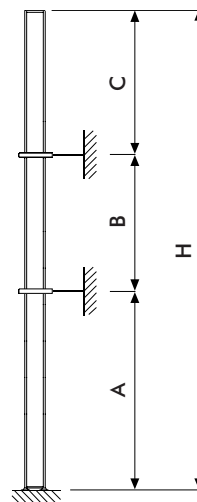

i

Gru ancorata
Crane tied to the structure
Grue ancrée
Geankerter Kran
Grúa anclada

I

GB

F

D

E






	HD23 R1		HD23 R2	
	[m]		[m]	
	L ₃₋₄	L ₁₋₂	L ₃₋₄	L ₁₋₂
A _{min/max}	30/30		30/54	30/60
B _{min/max}	24/30		24-30	24/36
C _{max}	24-(30Ⓜ)	30-(36Ⓜ)	24-(30Ⓜ)	30-(36Ⓜ)
H _{max}	i			

Torre **I**
Tower **GB**

Tour **F**
Turm **D**

Torre **E**

HD23

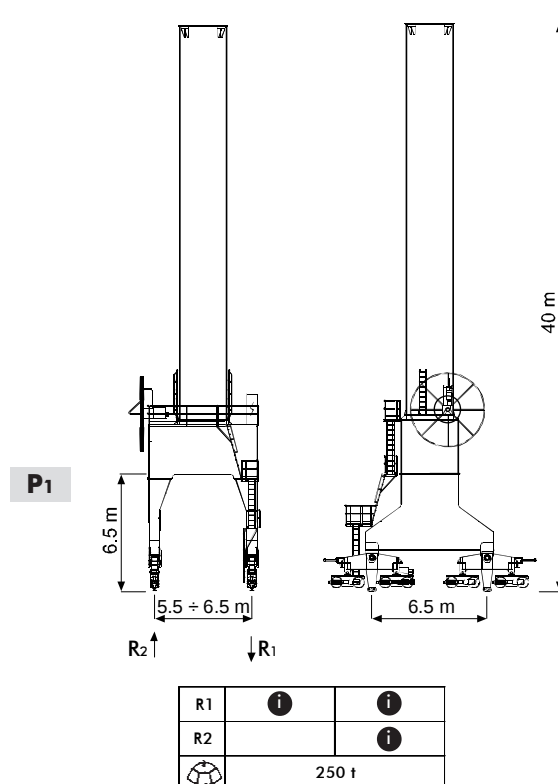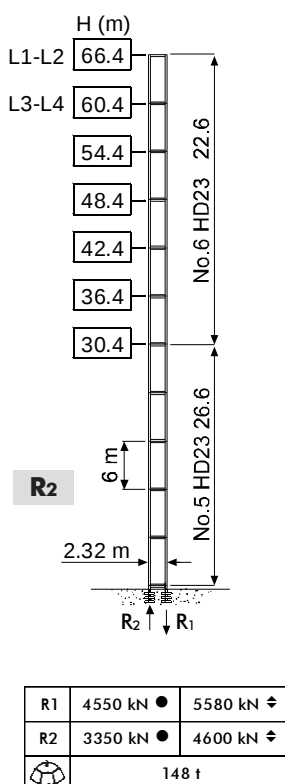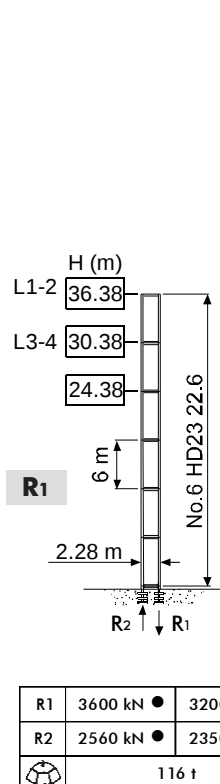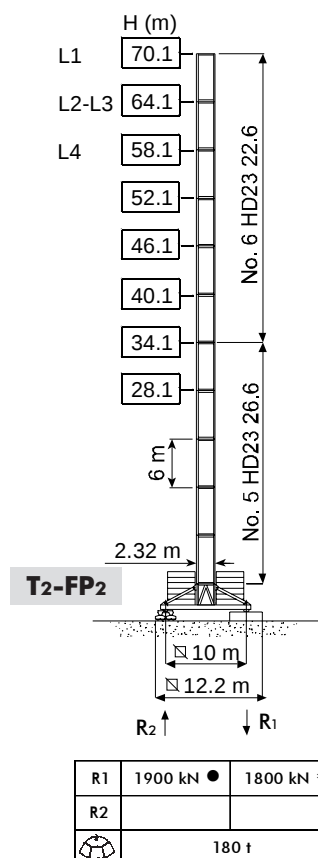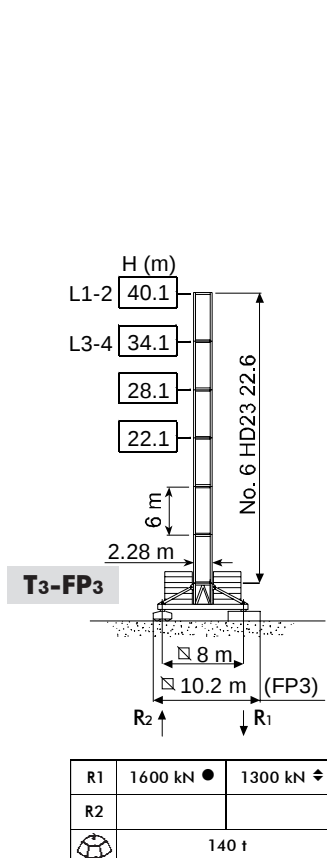

Meccanismi
Mechanisms

I
GB

Mécanismes
Antriebe

F
D

Mecanismos

E

		
297 * kVA	400 - 460 V / 50 - 60 Hz	2000/14/CE

* Gru senza traslazione / Crane without travelling equipment / Grue sans translation / Krane ohne Schienenfahren / Grúa sin traslación

	110 AWL 120 LLC D1 110 AWL 120 LLC D2		m/min	t	kW	 630 m (LLC D1) 1140 m (LLC D2)
			0 ⇌ 40	12		
			0 ⇌ 55	8.6		
			0 ⇌ 75	6		
			0 ⇌ 102	4.2		
			0 ⇌ 116	0.6		
			0 ⇌ 20	24		
			0 ⇌ 27.5	17.2		
			0 ⇌ 37.5	12		
			0 ⇌ 51	8.4		
			0 ⇌ 58	1.2		

	LWL 11000	2.8 min	110 kW
	SCC 2 2 132 L	0 ⇌ 0.65 r.p.m.	2 × 14 kW
	● TVF 2RT 4M11	0 ⇌ 24 m/min	4 × 11 kW
	▲ TSR 4RG 4M8	12 ⇌ 24 m/min	4 × 80 Nm
	■ TVF 4RT 8M11	0 ⇌ 24 m/min	8 × 11 kW
			

	●	▲	■
	Max. H [m]		
T ₃	28.1	40.1	40.1
T ₂	40.1	70.1	70.1
P ₁	-	40	40

	Sollevamento	I	Hoisting	GB	Levage	F	Heben	D	Elevación	E
	Brandeggio		Luffing		Relevage		Ausleger-Einziehen		Elevación de pluma	
	Rotazione		Slewing		Orientation		Schwenken		Orientación	
	Traslazione		Travelling		Translation		Schienenfahren		Traslación	
	Direttiva sul livello acustico		Directive on noise level		Directive sur le niveau acoustique		Richtlinie für den Schall-Leistungspegel		Directiva sobre el nivel acustico	
	Consultateci		Consult us		Nous consulter		Auf Anfrage		Consultarnos	
	Potenza totale richiesta		Power requirements		Puissance totale nécessaire		Geforderte Stromstärke		Potencia necesaria	
	Alimentazione		Power supply		Alimentation		Stromversorgung		Alimentación	

Gru Comedil s.r.l.

A Terex Company



Via S. Egidio 42/A, 33074 Fontanafredda (PN) - Italy
Tel. (+39) 0434 567 311 - Telefax (+39) 0434 998631

Internet e-mail: info@comedil.com
Internet home page: www.comedil.com

Divisione Automontanti

Via Alessandrina, 25 - 20095 Cusano Milanino (MI) - Italy
Tel. (+39) 02 613 16011 - Telefax (+39) 02 613 16034

Internet e-mail: info.CBR@comedil.com