




TEREX | COMEDIL

Gru a montaggio rapido

Self-erecting Crane • Grue à montage rapide
Schnellmontagekran • Grúa de montaje rapido

Mono-Trifase • Single-Three phase • Mono-Triphasé • Ein-Dreiphasig • Mono-Trifasica

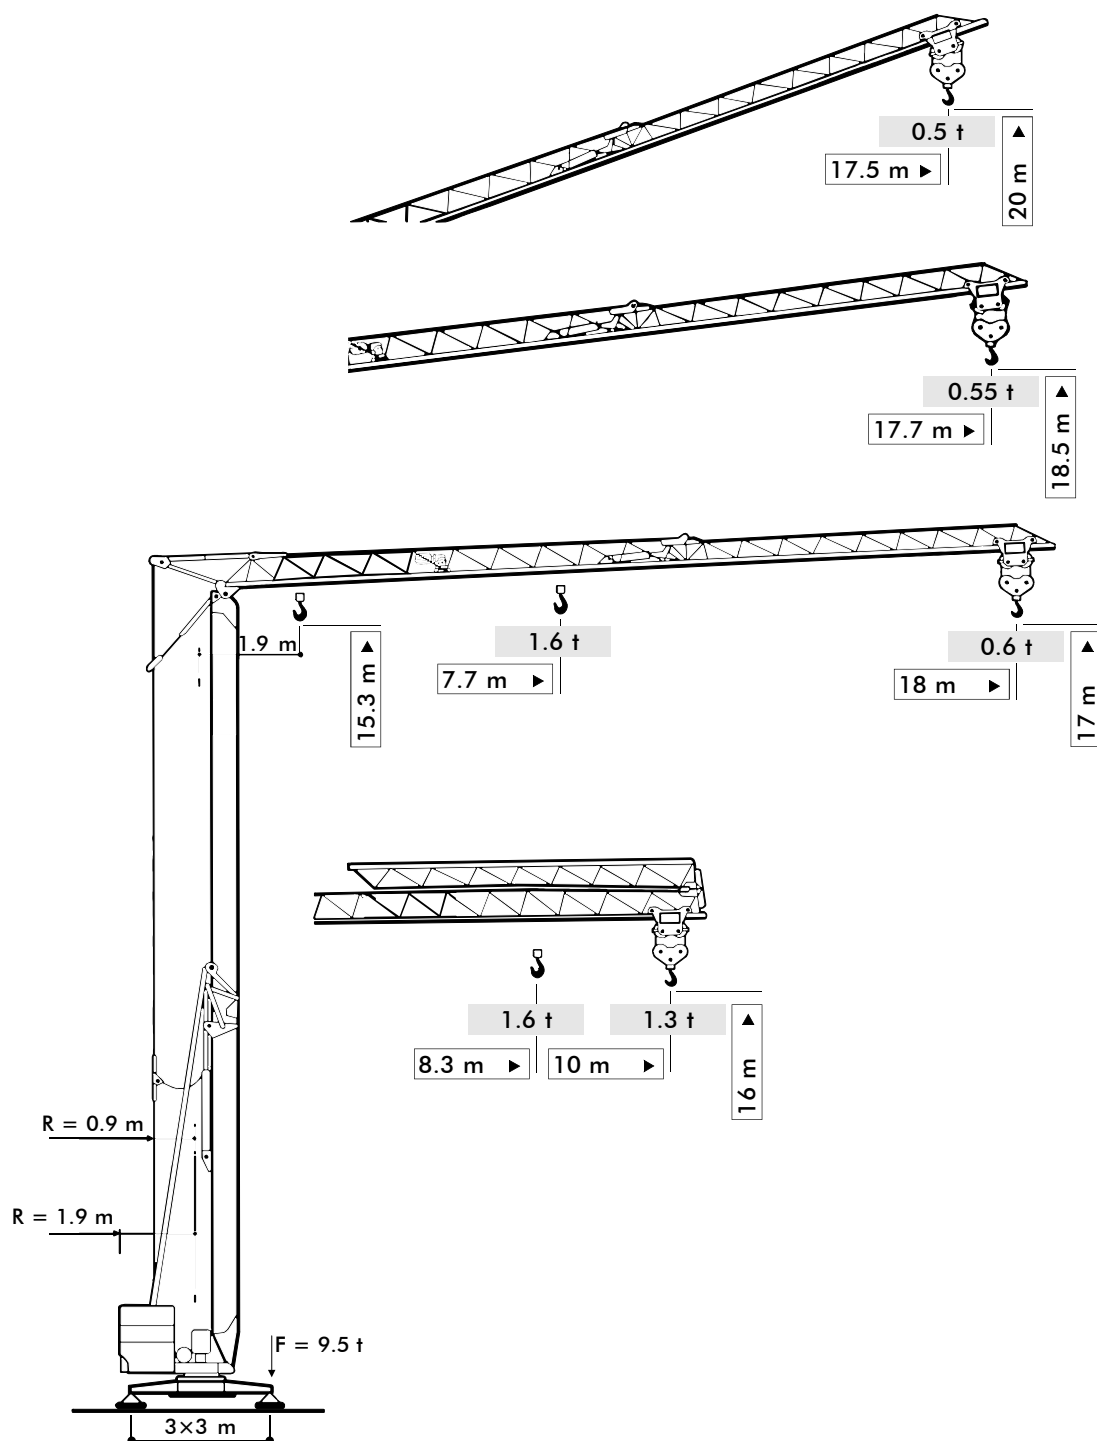

CBR 18H-1.6 VARIANT

Diagramma di portata **I**

Load Diagram **GB**


Courbes de charges **F**

Lastkurven **D**

Curvas de cargas **E**


CBR 18H												
		m	1.9	4	6	8	10	12	14	16	18	
1.6 t	-	7.70 m	t	1.60	1.60	1.60	1.52	1.18	0.95	0.80	0.70	0.60

- Braccio massimo
- Maximum jib
- Flèche étendu
- Ausladung
- Pluma extendida




CBR 18H										
		m	1.9	4	6	8	10			
1.6 t	- 8.30 m	t	1.60	1.60	1.60	1.60	1.30			

- Braccio ripiegato
- Folded jib
- Flèche repliée
- Ausleger eingeklappt
- Pluma cerrada




CBR 18H													
		m	1.9	4	6	7.7	8	10	12	14	16	17.7	
0.55 t	-	t	0.55	0.55	0.55	0.55	0.55	0.55	0.55	0.55	0.55	0.55	

- Braccio impennato 10°
- Raised jib 10°
- Flèche relevée à 10°
- Auslegersteilstellung 10°
- Pluma inclinada a 10°



CBR 18H													
		m	1.9	4	6	7.7	8	10	12	14	16	17.5	
0.5 t	-	t	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	

- Braccio impennato 15°
- Raised jib 15°
- Flèche relevée à 15°
- Auslegersteilstellung 15°
- Pluma inclinada a 15°



Meccanismi **I**

Mechanisms **GB**

Mécanismes **F**

Antriebe **D**

Mecanismos **E**

		3 kW - 230 V			6 kW - 230 V			10 kVA - 400 V			kW		
		m/min		kg	m/min		kg	m/min		kg			
		▲	▼		▲	▼		▲	▼				
Sollevamento		4	4	1600	4	4	1600	4	4	1600	5,5		
Hoisting		8	17	1600	17	17	1600	17	17	1600			
Heben		20	36	600	36	36	600	36	36	700			
Levage		0 ⇌ 11 ⇌ 30		-	0 ⇌ 11 ⇌ 30		-	0 ⇌ 11 ⇌ 30		-	1,84		
Elevación													
Distribuzione - Trolleying													
Katzfahren - Distribution													
Distribución													
Rotazione - Slewing													
Schwenken - Orientation													
Orientación													
0 ⇌ 0,2 ⇌ 0,9 tr/min-U/min-rpm											1,1		
Montaggio - Erection - Montage - Montage - Montaje											1,8		
Zavorra di completamento - Completion ballast - Gegenballast beton - Lest d'appoint - Lastre de finalización										3760 kg			
Peso gru (Zavorra di base inclusa) - Crane weight (Base ballast included) - Kranegewicht (Inkl. Grundballast) - Poids de la grue (Lest de base incluse) - Peso della grua (Lastre de base inclusa)										7750 kg			


- Movimenti controllati da inverter
- Motions controlled by frequency converter
- Frequenzumrichter gesteuerte Bewegungen
- Mouvements contrôlés par variateur
- Movimientos controlados por variadores

- Montaggio oleodinamico integrale
- Full hydraulic erection
- Vollhydraulische Montage
- Montage hydraulique intégral
- Montaje hidraulico integral

- Trasportabile con zavorra di montaggio
- Trailerable with erection ballast
- Verfahrbar mit Montage-Ballast
- Transportable avec lest de montage
- Transportable con lastre de montaje

- Braccio a ripiegamento oleodinamico
- Hydraulic jib unfolding
- Hydraulisch klappbar Ausleger
- Repliage hydraulique de la flèche
- Pluma con repliegue hidraulico

- Zincatura a caldo torre e braccio
- Galvanized tower and jib
- Ausleger und Turm feuerverzinkt
- Flèche et mât galvanisés
- Torre y pluma cincadas en caliente

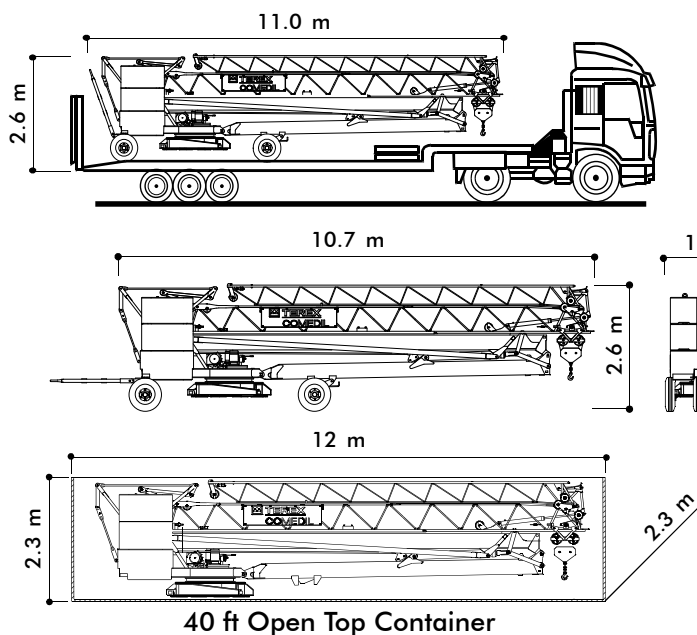

Sollevamento
Traslazione carrello
Rotazione

I

Hoisting
Trolleying
Slewing

GB

Levage
Distribution
Orientation

F

Heben
Katzfahren
Schwenken

D

Elevación
Distribución
Orientación

E