




TEREX® | COMEDIL

Gru a montaggio rapido

Self-erecting Crane • Grue à montage rapide
Schnellmontagekran • Grúa de montaje rapido

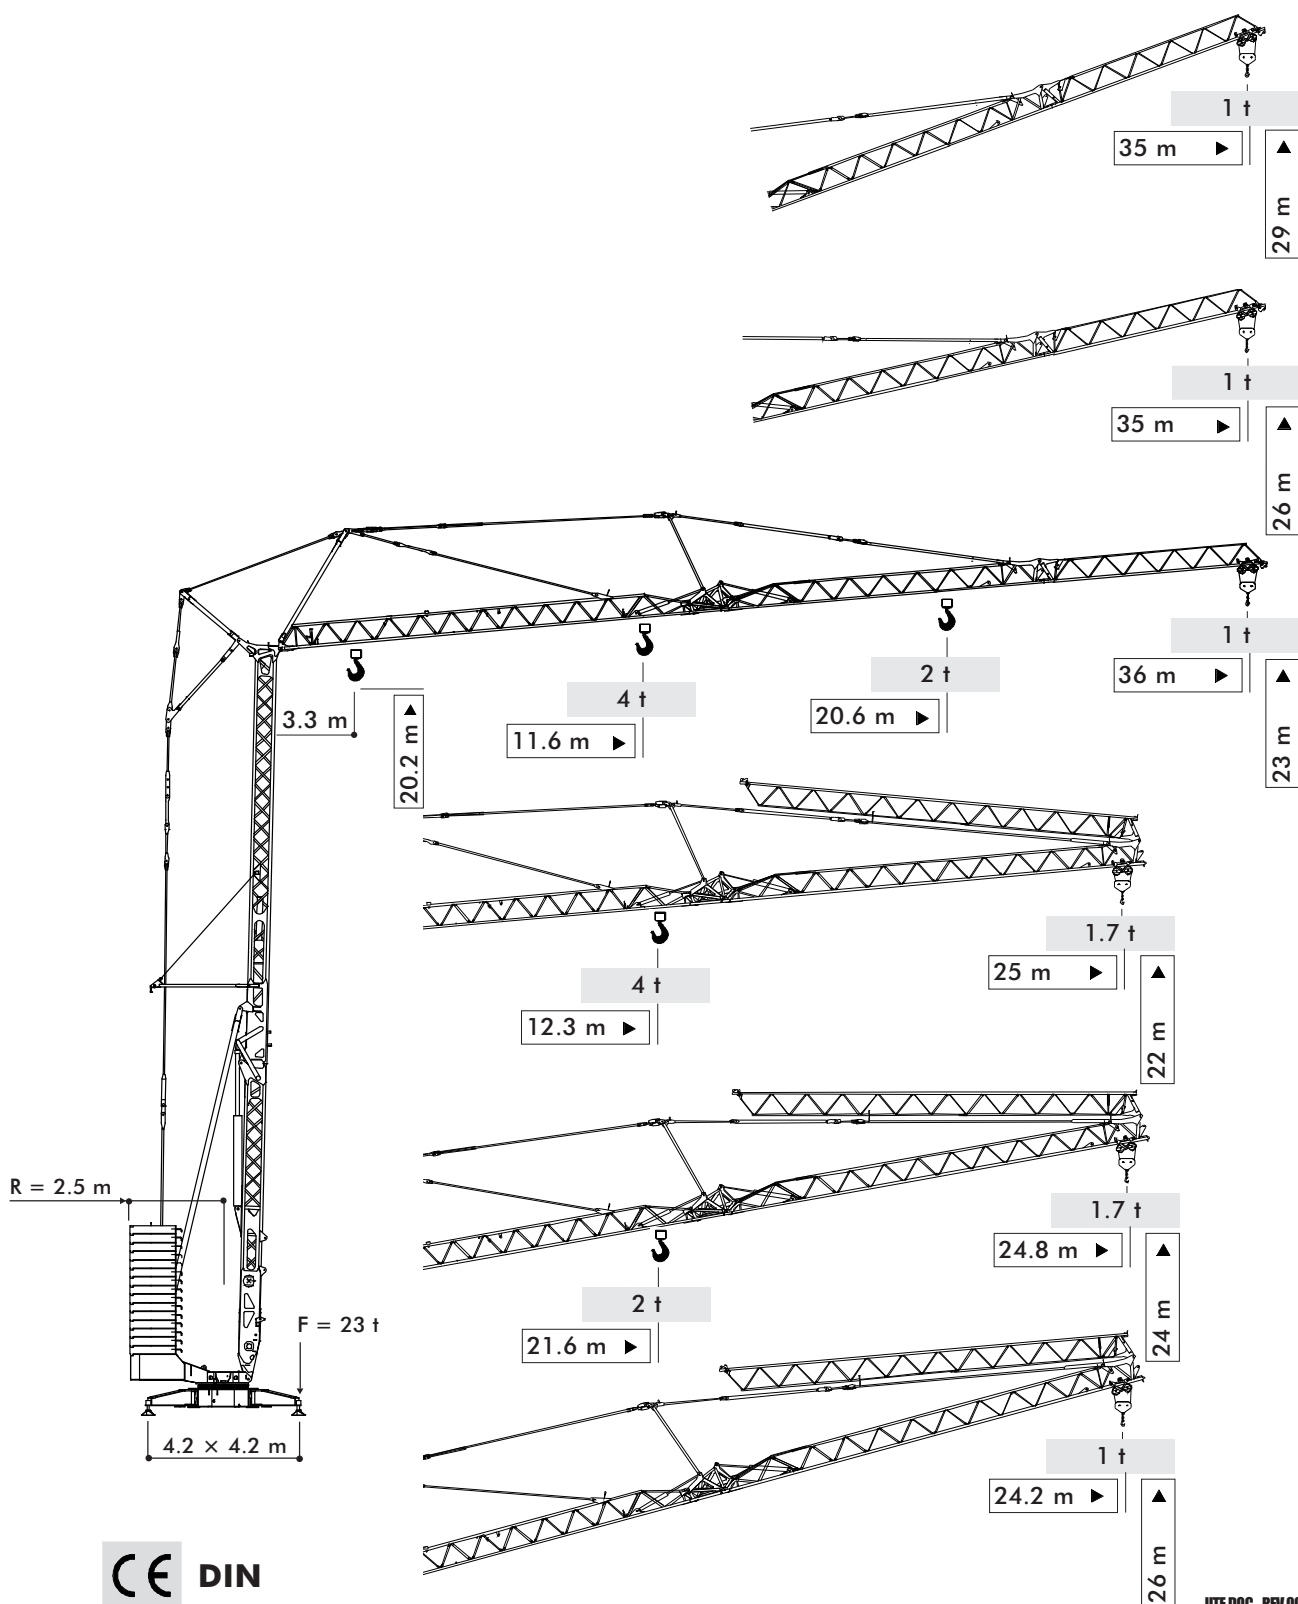


CBR 36H-4

Diagramma di portata I **Load Diagram GB** **Courbes de charges F** **Lastkurven D** **Curvas de cargas E**


CBR 36H											
		m	3.3	8	12	16	20	24	28	32	36
4 t	- 11.60 m	t	4.00	4.00	3.83	2.74	2.03	1.61	1.36	1.20	1.00
CBR 36H											
		m	3.3	8	12	16	20	24	28	32	35.5
2 t	- 20.40 m	t	2.00	2.00	2.00	2.00	2.00	1.66	1.35	1.13	1.00
CBR 36H											
		m	3.3	8	12	16	20	24	28	32	35
1 t	-	t	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
CBR 36H											
		m	3.3	8	12	16	20	24	25		
4 t	- 12.30 m	t	4.00	4.00	4.00	2.92	2.21	1.79	1.70		
CBR 36H											
		m	3.3	8	12	16	20	24	24.8		
2 t	- 21.60 m	t	2.00	2.00	2.00	2.00	2.00	1.43	1.70		
CBR 36H											
		m	3.3	8	12	16	20	24	24.2		
1 t	-	t	1.00	1.00	1.00	1.00	1.00	1.00	1.00		

- Braccio massimo
- Maximum jib
- Flèche étendu
- Ausladung
- Pluma extendida
- Braccio impennato 10°
- Raised jib 10°
- Flèche relevée à 10°
- Auslegersteilstellung 10°
- Pluma inclinada a 10°
- Braccio impennato 15°
- Raised jib 15°
- Flèche relevée à 15°
- Auslegersteilstellung 15°
- Pluma inclinada a 15°
- Braccio ripiegato
- Folded jib
- Flèche repliée
- Ausleger eingeklappt
- Pluma cerrada
- Braccio ripiegato impennato 10°
- Folded and raised jib 10°
- Flèche repliée et relevée a 10°
- Ausleger eingeklappt in Steilstellung 10°
- Pluma inclinada y cerrada a 10°
- Braccio ripiegato impennato 15°
- Folded and raised jib 15°
- Flèche repliée et relevée a 15°
- Ausleger eingeklappt in Steilstellung 15°
- Pluma inclinada y cerrada a 15°

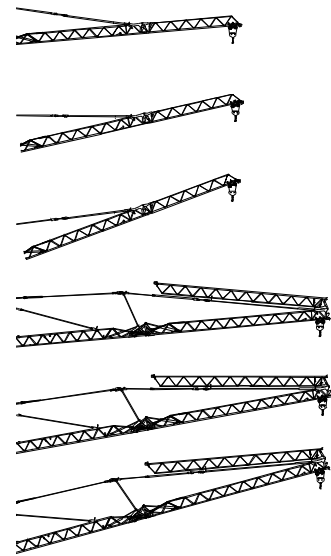

Meccanismi I **Mechanisms GB** **Mécanismes F** **Antriebe D** **Mecanismos E**

CBR 36H-4							
		m/min	kg	kW	m/min	kg	kW
Sollevamento Hoisting Levage Heben Elevación		0 ÷ 6	2000	8.8	0 ÷ 3	4000	8.8
		6 ÷ 23	2000		3 ÷ 11.5	4000	
		23 ÷ 46	1000		11.5 ÷ 23	2000	
Distribuzione • Trolleying • Distribution Katzfahren • Distribución		0 ÷ 16 ÷ 46		3	0 ÷ 16 ÷ 46		3
Rotazione • Slewing • Orientation Schwenken • Orientación		0 ÷ 0.2 ÷ 0.9 tr/min - U/min - rpm		5 daNm	0 ÷ 0.2 ÷ 0.9 tr/min - U/min - rpm		5 daNm
Montaggio • Erection • Montage • Montage • Montaje						2.2 kW	
Potenza elettrica necessaria • Power requirements • Puissance électrique nécessaire Anschlußwert • Potencia electrica necesaria						20 kVA	
Rete elettrica • Main supply • Réseau • Netzstrom • Alimentación						400 V - 50 Hz	
Zavorra di completamento • Completion ballast • Gegenballast beton • Lest d'appoint • Lastre de finalización						18450 kg	
Peso gru (Zavorra di base inclusa) • Crane weight (Base ballast included) • Kranegewicht (Inkl. Grundballast) • Poids de la grue (Lest de base incluse) • Peso della grua (Lastre de base incluida)						18050 kg	

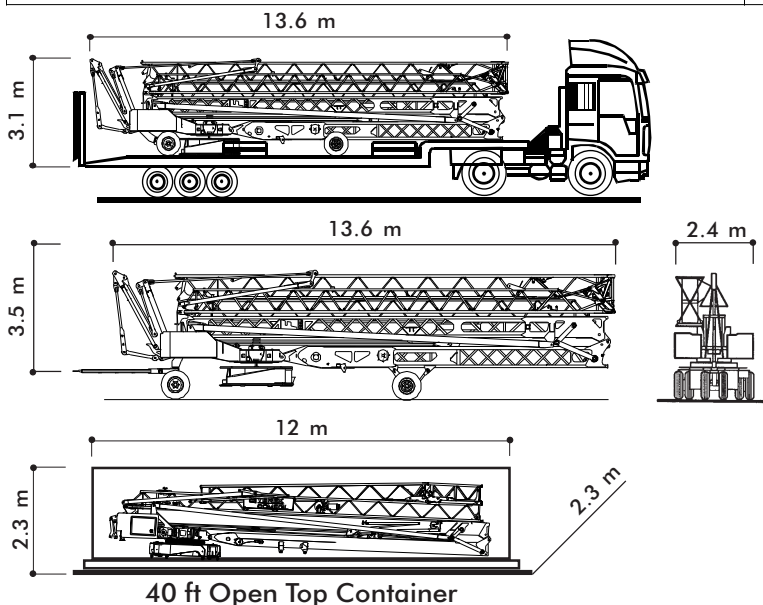

- Movimenti controllati da inverter
- Motions controlled by frequency converter
- Frequenzumrichter gesteuerte Bewegungen
- Mouvements contrôlés par variateur
- Movimientos controlados por variadores

- Montaggio oleodinamico integrale
- Full hydraulic erection
- Vollhydraulische Montage
- Montage hydraulique intégral
- Montaje hidraulico integral

- Trasportabile con zavorra di montaggio
- Trailerable with erection ballast
- Verfahrbar mit Montage-Ballast
- Transportable avec lest de montage
- Transportable con lastre de montaje

- Braccio a ripiegamento oleodinamico
- Hydraulic jib unfolding
- Hydraulisch klappbar Ausleger
- Repliage hydraulique de la flèche
- Pluma con repliegue hidraulico

- Zincatura a caldo torre e braccio
- Galvanized tower and jib
- Ausleger und Turm feuerverzinkt
- Flèche et mât galvanisés
- Torre y pluma cadadas en caliente

	Sollevamento	I	Hoisting	GB	Levage	F	Heben	D	Elevación	E
	Traslazione carrello		Trolleying		Distribution		Katzfahren		Distribución	
	Rotazione		Slewing		Orientation		Schwenken		Orientación	