


Gru a montaggio rapido
Self-erecting Crane • Grue à montage rapide
Schnellmontagekran • Grúa de montaje rapido

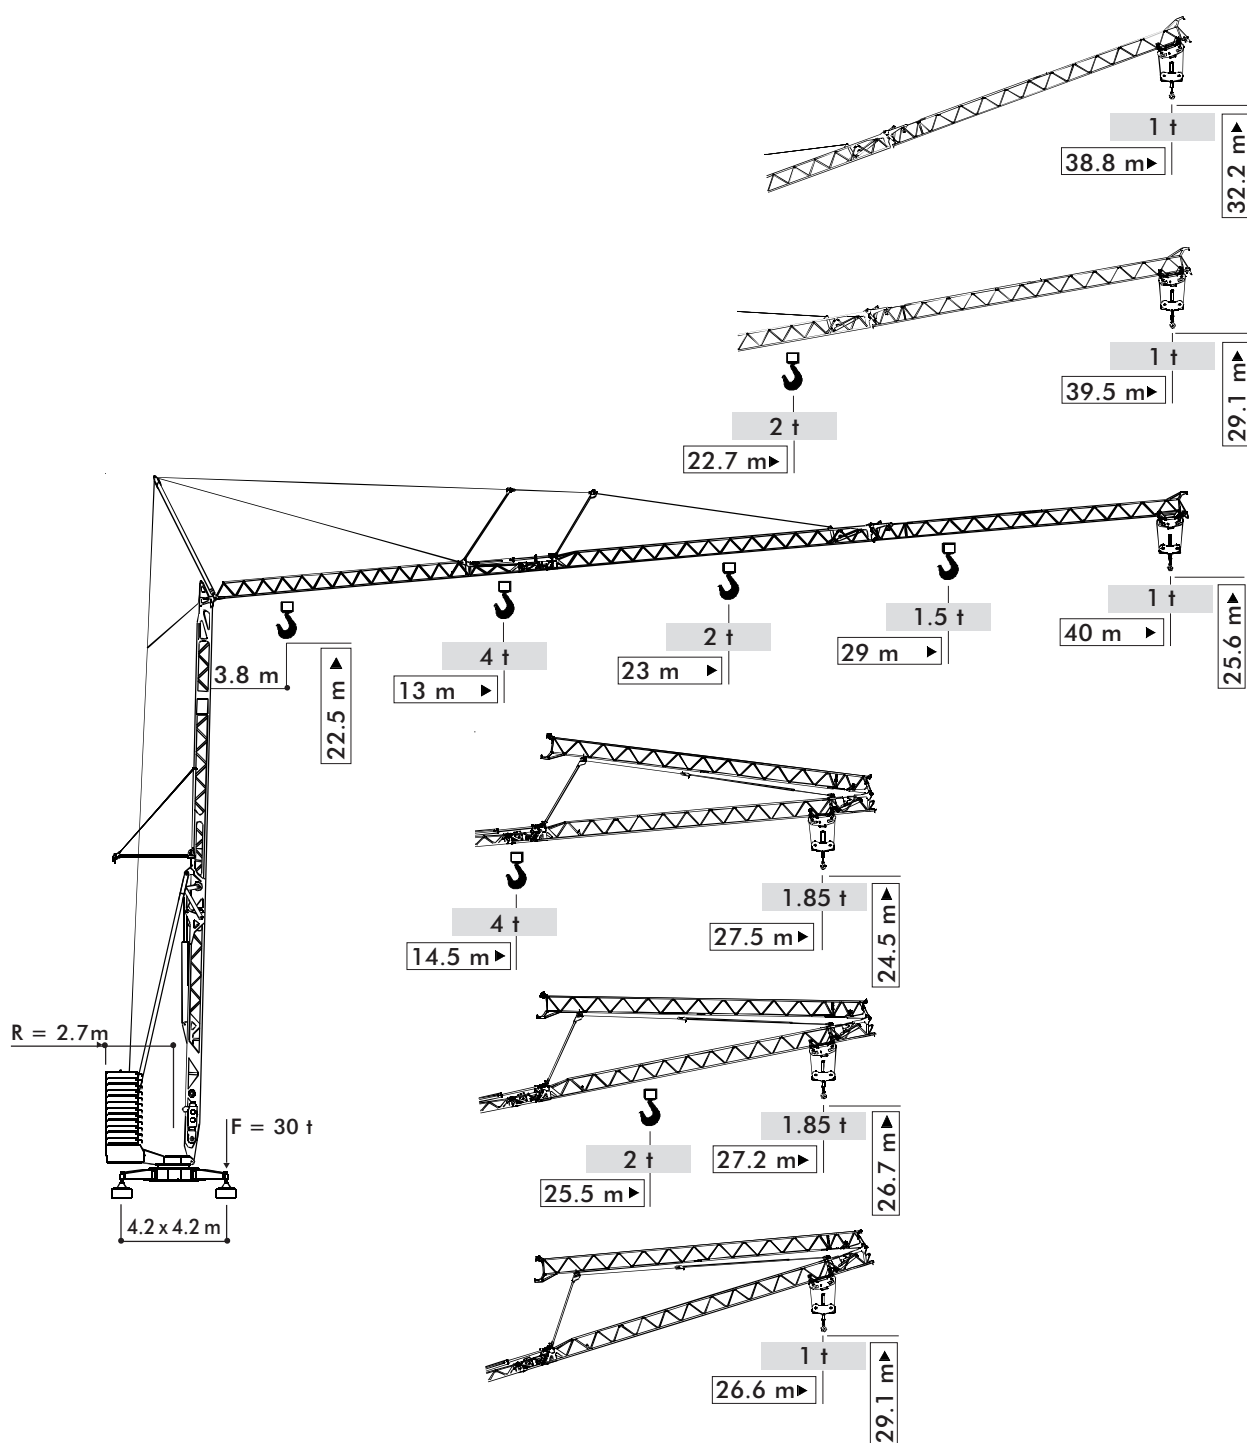

CBR 40H-4

Diagramma di portata I
Load Diagram GB
Courbes de charges F
Lastkurven D
Curvas de cargas E

CBR 40H												
		m	3.8	8	12	16	20	24	28	32	36	40
4 t	- 13.00 m	t	4.00	4.00	4.00	3.18	2.40	1.89	1.57	1.37	1.20	1.00

- Braccio massimo
- Maximum jib
- Flèche étendu
- Ausladung
- Pluma extendida

CBR 40H												
		m	3.8	8	12	16	20	24	28	32	36	39.5
2 t	- 22.70 m	t	2.00	2.00	2.00	2.00	2.00	1.87	1.55	1.31	1.13	1.00

- Braccio impennato 10°
- Raised jib 10°
- Flèche relevée à 10°
- Auslegersteilstellung 10°
- Pluma inclinada a 10°

CBR 40H											
	 m	3.8	8	12	16	20	24	28	32	36	38.8
1 t	- t	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

- Braccio impennato 15°
- Raised jib 15°
- Flèche relevée à 15°
- Auslegersteilstellung 15°
- Pluma inclinada a 15°

CBR 40H									
		m	3.8	8	12	16	20	24	27.5
4 t	14.50 m	t	4.00	4.00	4.00	3.56	2.71	2.18	1.85


- Braccio ripiegato
- Folded jib
- Flèche repliée
- Ausleger eingeklappt
- Pluma cerrada

CBR 40H									
		m	3.8	8	12	16	20	24	27.2
2 t	25.50 m	t	2.00	2.00	2.00	2.00	2.00	2.00	1.85

- Braccio ripiegato impennato 10°
- Folded and raised jib 10°
- Flèche repliée et relevée a 10°
- Ausleger eingeklappt in Steilstellung 10°
- Pluma inclinada y cerrada a 10°

CBR 40H									
		m	3.8	8	12	16	20	24	26.6
1 t	-	t	1.00	1.00	1.00	1.00	1.00	1.00	1.00

- Braccio ripiegato impennato 15°
- Folded and raised jib 15°
- Flèche repliée et relevée a 15°
- Ausleger eingeklappt in Steilstellung 15°
- Pluma inclinada y cerrada a 15°

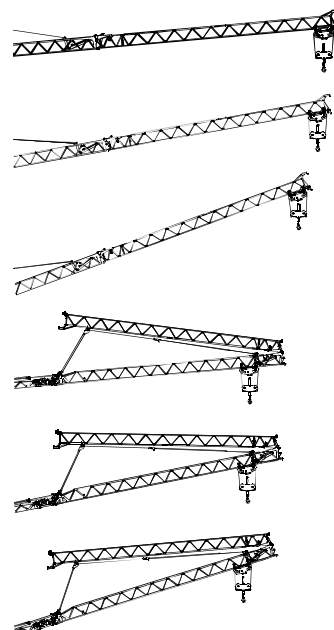
Meccanismi I
Mechanisms GB
Mécanismes F
Antriebe D
Mecanismos E

CBR 40H-4							
		m/min	kg	kW	m/min	kg	kW
Sollevamento Hoisting Heben Levage Elevación		0 ~ 6	2000	8.8	0 ~ 3	4000	8.8
		6 ~ 23	2000		3 ~ 11.5	4000	
		23 ~ 46	1000		11.5 ~ 23	2000	
Distribuzione - Trolleying Katzfahren - Distribution Distribución		0 ~ 16 ~ 46		3	0 ~ 16 ~ 46		3
Rotazione - Slewing Schwenken - Orientation Orientación		0 ~ 0.2 ~ 0.8 tr/min-U/min-rpm - 6 daNm					
Montaggio - Erection - Montage - Montage - Montaje							2.2 kW
Potenza elettrica necessaria - Power requirements - Puissance électrique nécessaire Anschlußwert - Potencia eléctrica necesaria							20 kVA
Rete elettrica - Main supply - Réseau - Netzstrom - Alimentación							400 V - 50 Hz
Zavorra di completamento - Completion ballast - Gegenballast beton - Last d'appoint - Lastre de finalización							20620 kg
Peso gru (Zavorra di base inclusa) - Crane weight (Base ballast included) - Kranegewicht (Inkl. Grundballast) - Poids de la grue (Last de base incluse) - Peso della grua (Lastre de base incluida)							20930 kg


- Movimenti controllati da inverter
- Motions controlled by frequency converter
- Frequenzumrichter gesteuerte Bewegungen
- Mouvements contrôlés par variateur
- Movimientos controlados por variadores

- Montaggio oleodinamico integrale
- Full hydraulic erection
- Vollhydraulische Montage
- Montage hydraulique intégral
- Montaje hidraulico integral

- Trasportabile con zavorra di montaggio
- Trailerable with erection ballast
- Verfahrbar mit Montage-Ballast
- Transportable avec lest de montage
- Transportable con lastre de montaje

- Braccio a ripiegamento oleodinamico
- Hydraulic jib unfolding
- Hydraulisch klappbar Ausleger
- Repliage hydraulique de la flèche
- Pluma con repliegue hidraulico

- Zincatura a caldo torre e braccio
- Galvanized tower and jib
- Ausleger und Turm feuerverzinkt
- Flèche et mât galvanisés
- Torre y pluma cincadas en caliente

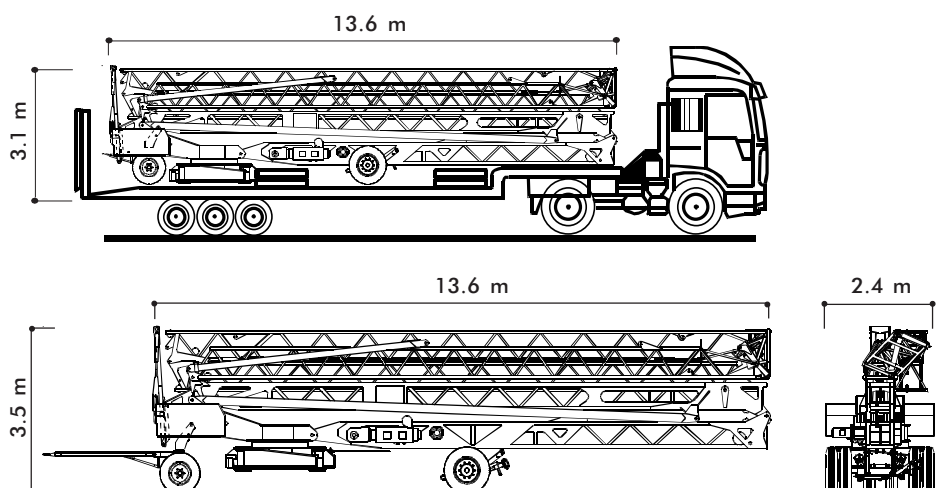

Sollevamento
Traslazione carrello
Rotazione



Hoisting
Trolleying
Slewing



Levage
Distribution
Orientation



Heben
Katzfahren
Schwenken



Elevación
Distribución
Orientación

