


Gru a montaggio rapido
Self-erecting Crane • Grue à montage rapide
Schnellmontagekran • Grúa de montaje rapido

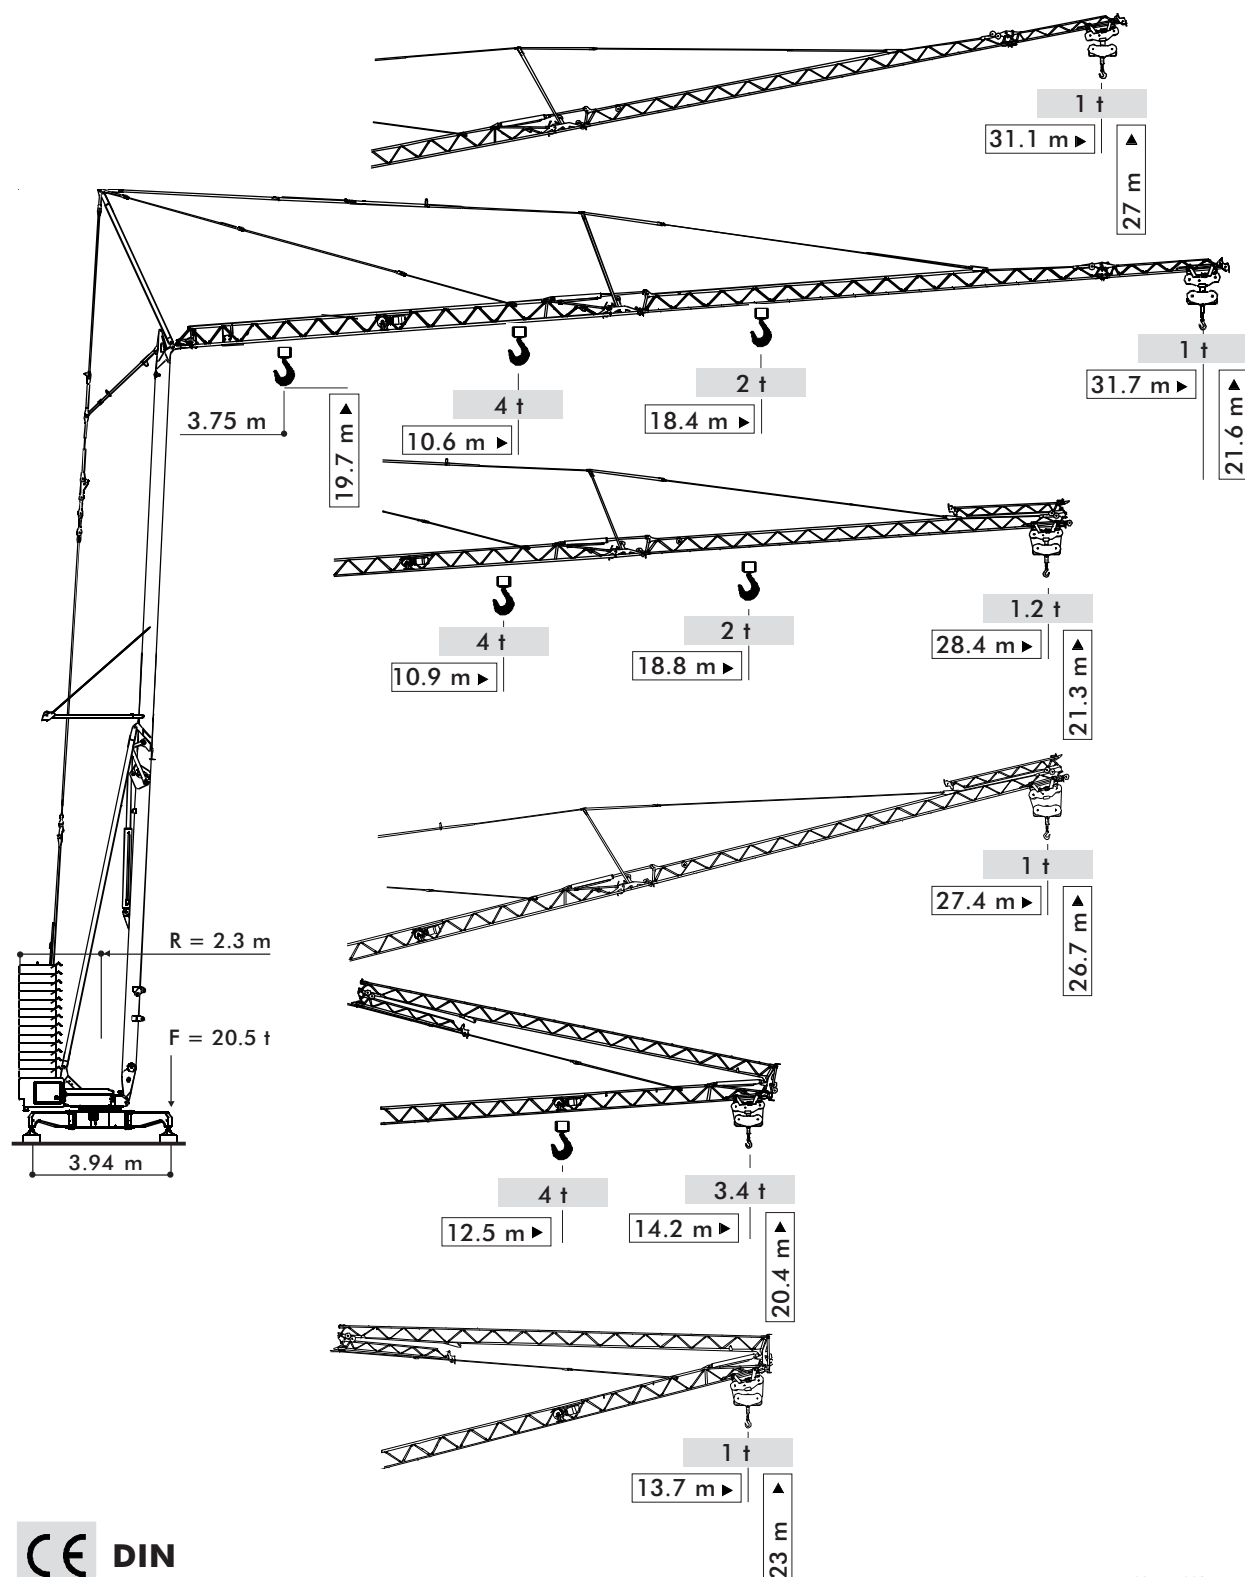

CBR 32 Plus

Diagramma di portata I

Load Diagram GB

Curves de charges F

Lastkurven D

Curvas de cargas E

CBR 32 Plus											
			m	3.75	8	12	16	20	24	28	31.7
4 t	-	10.60 m	t	4.00	4.00	3.48	2.40	1.78	1.45	1.24	1.00

CBR 32 Plus										
		m	3.75	8	12	16	20	24	28	31.1
1 t	-	t	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00


CBR 32 Plus										
		m	3.75	8	12	16	20	24	28	28.4
4 t	- 10.90 m	t	4.00	4.00	3.56	2.44	1.83	1.51	1.23	1.20

CBR 32 Plus									
		m	3.75	8	12	16	20	24	27.4
1 t	-	t	1.00	1.00	1.00	1.00	1.00	1.00	1.00

CBR 32 Plus									
		m	3.75	6	8	10	12	14.2	
4 t	- 12.50 m	t	4.00	4.00	4.00	4.00	4.00	3.40	

CBR 32 Plus									
		m	3.75	6	8	10	12	13.7	
1 t		t	1.00	1.00	1.00	1.00	1.00	1.00	

- Braccio massimo
- Maximum jib
- Flèche étendu
- Ausladung
- Pluma extendida
- Braccio impennato 15°
- Raised jib 15°
- Flèche relevée à 15°
- Auslegersteilstellung 15°
- Pluma inclinada a 15°
- Braccio ripiegato
- Folded jib
- Flèche repliée
- Ausleger eingeklappt
- Pluma cerrada
- Braccio ripiegato impennato 15°
- Folded and raised jib 15°
- Flèche repliée et relevée a 15°
- Ausleger eingeklappt in Steilstellung 15°
- Pluma inclinada y cerrada a 15°
- Braccio ripiegato
- Folded jib
- Flèche repliée
- Ausleger eingeklappt
- Pluma cerrada
- Braccio ripiegato impennato 15°
- Folded and raised jib 15°
- Flèche repliée et relevée a 15°
- Ausleger eingeklappt in Steilstellung 15°
- Pluma inclinada y cerrada a 15°

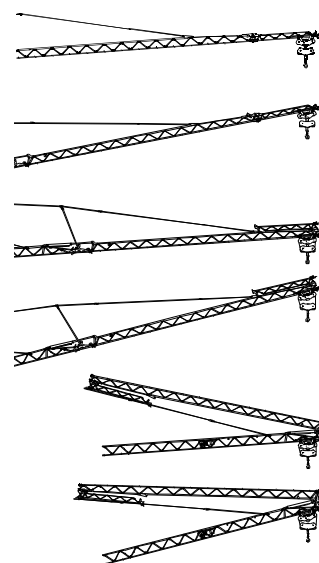

Meccanismi I

Mechanisms GB

Mécanismes F

Antriebe D

Mecanismos E

CBR 32 Plus		m/min			kg			kW		
Sollevamento Hoisting Levage Heben Elevación		8	2000	2.6	4	4000	2.6			
		23	2000	8.8	11.5	4000	8.8			
		46	1000	8.8	23	2000	8.8			
Distribuzione • Trolleying • Distribution Katzfahren • Distribución		0-18 ≈ 42		3	0-18 ≈ 42		3			
Rotazione • Slewing • Orientation Schwenken • Orientación		0 ≈ 0.2 ≈ 0.9 tr/min - U/min - rpm	4 daNm		0 ≈ 0.2 ≈ 0.9 tr/min - U/min - rpm	4 daNm				
Montaggio • Erection • Montage • Montage • Montaje							2.2 kW			
Potenza elettrica necessaria • Power requirements • Puissance électrique nécessaire Anschlußwert • Potencia eléctrica necesaria							20 kVA			
Rete elettrica • Main supply • Réseau • Netzstrom • Alimentación							400 V - 50 Hz			
Zavorra di completamento • Completion ballast • Gegenballast beton • Lest d'appoint • Lastre de finalización							14950 kg			
Peso gru (Zavorra di base inclusa) • Crane weight (Base ballast included) • Kranegewicht (inkl. Grundballast) • Poids de la grue (Lest de base incluse) • Peso della grua (Lastre de base incluida)							14050 kg			


- Movimenti controllati da inverter
- Motions controlled by frequency converter
- Frequenzumrichter gesteuerte Bewegungen
- Mouvements contrôlés par variateur
- Movimientos controlados por variadores

- Montaggio oleodinamico integrale
- Full hydraulic erection
- Vollhydraulische Montage
- Montage hydraulique intégral
- Montaje hidraulico integral

- Trasportabile con zavorra di montaggio
- Trailerable with erection ballast
- Verfahrbar mit Montage-Ballast
- Transportable avec lest de montage
- Transportable con lastre de montaje

- Braccio a ripiegamento oleodinamico
- Hydraulic jib unfolding
- Hydraulisch klappbar Ausleger
- Repliage hydraulique de la flèche
- Pluma con repliegue hidraulico

- Zincatura a caldo torre e braccio
- Galvanized tower and jib
- Ausleger und Turm feuerverzinkt
- Flèche et mât galvanisés
- Torre y pluma caladas en caliente

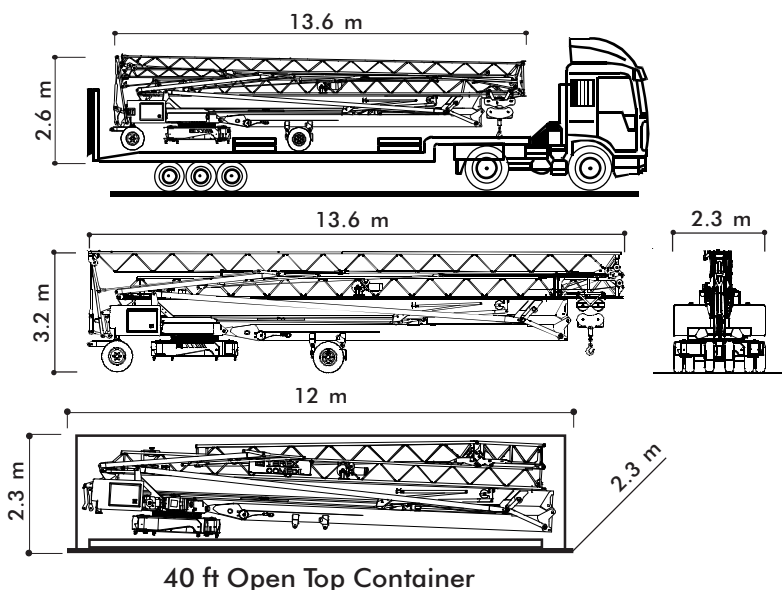

	Sollevamento	I	Hoisting	GB	Levage	F	Heben	D	Elevación	E
	Traslazione carrello		Trolleying		Distribution		Katzfahren		Distribución	
	Rotazione		Slewing		Orientation		Schwenken		Orientación	