



CRANE SPECIFICATION

TADANO TR200M-4

COMPREHENSIVE LIFTING SOLUTIONS

We look forward to providing a full heavy lift engineering and crane solution for your next project. Our heavy lift engineers and on site personnel are experienced in managing and organising highly de-manding lift requirements.

Contact us to discuss your lifting requirements and a free quote.

BRISBANE (HQ)

07 3907 5800
37 Paringa Rd, Murarrie, QLD, 4172

ROMA

07 4622 5522
8 Wormwell Drive, Roma QLD 4455

GOLD COAST

07 5593 4688
9 Kimberley Rd, Burleigh Heads, QLD, 4220

SUNSHINE COAST

0409 595 618
562 Maroochydore Rd, Kunda Park, QLD, 4556

GLADSTONE

07 4972 9326
7 Red Cover Rd, Gladstone, QLD, 4680

TOWNSVILLE

07 4779 4088
16 Mackley St, Garbutt QLD 4814

ROCKHAMPTON

07 4939 1095
371 Leichhardt St, Rockhampton QLD, 4700

MACKAY

07 4952 6998
135 Diesel Drive, Paget QLD 4740



ROUGH TERRAIN CRANE

TR-200M

JAPANESE SPECIFICATIONS

OUTLINE	SPEC. NO.
5-section Boom	TR-200M-4-00109

Control No. JA-01

TOTAL RATED LOADS

- (1) With outriggers set (360°)
(i) 4 section boom condition

Unit:ton				
Outriggers fully extended				
A	8.5m	14.4m	20.3m	26.2m
B (m)				
2.5	20.0	12.0	9.0	
3.0	20.0	12.0	9.0	
3.5	20.0	12.0	9.0	7.0
4.0	18.5	12.0	9.0	7.0
4.5	16.5	12.0	9.0	7.0
5.0	15.0	12.0	9.0	7.0
5.5	13.7	12.0	9.0	7.0
6.0	12.5	11.4	9.0	7.0
6.5	11.5	10.6	8.5	7.0
7.0		9.9	8.0	6.8
8.0		8.4	7.2	6.15
9.0		6.8	6.4	5.55
10.0		5.8	5.8	5.05
11.0		4.8	4.9	4.65
12.0		4.15	4.2	4.2
13.0			3.65	3.65
14.0			3.2	3.2
15.0			2.8	2.8
16.0			2.5	2.5
17.0			2.2	2.2
18.0			2.0	2.0
19.0				1.75
20.0				1.4
22.0				1.1
24.0				0.8

Unit:ton				
Outriggers middle extended				
A	8.5m	14.4m	20.3m	26.2m
B (m)				
2.5	20.0	12.0	9.0	
3.0	20.0	12.0	9.0	
3.5	20.0	12.0	9.0	7.0
4.0	18.5	12.0	9.0	7.0
4.5	16.5	12.0	9.0	7.0
5.0	14.5	12.0	9.0	7.0
5.5	12.0	12.0	9.0	7.0
6.0	10.1	10.3	9.0	7.0
6.5	8.7	8.9	8.5	7.0
7.0		7.9	7.85	6.8
8.0		6.15	6.15	6.15
9.0		5.0	5.05	5.05
10.0		4.15	4.2	4.2
11.0		3.5	3.55	3.55
12.0		3.0	3.05	3.05
13.0			2.65	2.65
14.0			2.3	2.3
15.0			2.0	2.0
16.0			1.75	1.75
17.0			1.55	1.4
18.0			1.35	1.2
19.0				1.0
20.0				0.85
22.0				0.6
24.0				0.4

Unit:ton				
Outriggers minimum extended				
A	8.5m	14.4m	20.3m	26.2m
B (m)				
2.5	20.0	12.0	9.0	
3.0	20.0	12.0	9.0	
3.5	18.9	12.0	9.0	7.0
4.0	14.2	12.0	9.0	7.0
4.5	11.3	11.5	9.0	7.0
5.0	9.3	9.5	9.0	7.0
5.5	7.9	8.0	8.1	7.0
6.0	6.8	6.9	6.95	6.95
6.5	5.9	6.0	6.05	6.05
7.0		5.3	5.35	5.35
8.0		4.2	4.25	4.25
9.0		3.4	3.45	3.45
10.0		2.8	2.9	2.85
11.0		2.35	2.4	2.4
12.0		2.0	2.0	2.05
13.0			1.7	1.7
14.0			1.4	1.35
15.0			1.1	1.1
16.0			0.9	0.9
17.0			0.75	0.75
18.0			0.6	0.6
19.0				0.45

A = Boom length
B = Working radius


(ii) 5 section boom condition

Unit: ton

Outriggers fully extended					Outriggers middle extended					Outriggers minimum extended				
A	B (m)	8.5m	14.4m	20.3m	26.2m	32.1m	A	B (m)	8.5m	14.4m	20.3m	26.2m	32.1m	
2.5	4.8	4.8	4.8	4.8			2.5	4.8	4.8	4.8	4.8			
3.0	4.8	4.8	4.8	4.8			3.0	4.8	4.8	4.8	4.8			
3.5	4.8	4.8	4.8	4.8	4.8		3.5	4.8	4.8	4.8	4.8	4.8		
4.0	4.8	4.8	4.8	4.8	4.8	3.4	4.0	4.8	4.8	4.8	4.8	4.8	3.4	
4.5	4.8	4.8	4.8	4.8	4.8	3.4	4.5	4.8	4.8	4.8	4.8	4.8	3.4	
5.0	4.8	4.8	4.8	4.8	4.8	3.4	5.0	4.8	4.8	4.8	4.8	4.8	3.4	
5.5	4.8	4.8	4.8	4.8	4.8	3.4	5.5	4.8	4.8	4.8	4.8	4.8	3.4	
6.0	4.8	4.8	4.8	4.8	4.8	3.4	6.0	4.8	4.8	4.8	4.8	4.8	3.4	
6.5	4.8	4.8	4.8	4.8	4.8	3.4	6.5	4.8	4.8	4.8	4.8	4.8	3.4	
7.0	4.8	4.8	4.8	4.8	4.8	3.4	7.0	4.8	4.8	4.8	4.8	4.8	3.4	
8.0	4.8	4.8	4.8	4.8	4.7	3.4	8.0	4.8	4.8	4.8	4.8	4.8	3.4	
9.0	4.8	4.8	4.8	4.8	4.3	3.4	9.0	4.8	4.8	4.8	4.8	4.8	3.4	
10.0	4.8	4.8	4.8	4.8	4.0	3.4	10.0	4.8	4.8	4.8	4.8	4.8	3.4	
11.0	4.8	4.8	4.8	4.8	3.8	3.2	11.0	4.8	4.8	4.8	4.8	4.8	3.1	
12.0	4.8	4.8	4.8	4.8	3.5	3.0	12.0	4.8	4.8	4.8	4.8	4.8	2.6	
13.0	4.8	4.8	4.8	4.8	3.2	2.85	13.0	4.8	4.8	4.8	4.8	4.8	2.2	
14.0	4.8	4.8	4.8	4.8	3.0	2.7	14.0	4.8	4.8	4.8	4.8	4.8	1.9	
15.0	4.8	4.8	4.8	4.8	2.85	2.5	15.0	4.8	4.8	4.8	4.8	4.8	1.7	
16.0	4.8	4.8	4.8	4.8	2.65	2.4	16.0	4.8	4.8	4.8	4.8	4.8	1.5	
17.0	4.8	4.8	4.8	4.8	2.4	2.3	17.0	4.8	4.8	4.8	4.8	4.8	1.1	
18.0	4.8	4.8	4.8	4.8	2.2	2.15	18.0	4.8	4.8	4.8	4.8	4.8	1.0	
19.0	4.8	4.8	4.8	4.8	2.0	2.0	19.0	4.8	4.8	4.8	4.8	4.8	0.8	
20.0	4.8	4.8	4.8	4.8	1.8	1.8	20.0	4.8	4.8	4.8	4.8	4.8	0.7	
22.0	4.8	4.8	4.8	4.8	1.5	1.5	22.0	4.8	4.8	4.8	4.8	4.8	0.5	
24.0	4.8	4.8	4.8	4.8	1.1	1.1	24.0	4.8	4.8	4.8	4.8	4.8	0.5	
26.0	4.8	4.8	4.8	4.8		0.9	26.0	4.8	4.8	4.8	4.8	4.8	0.4	
28.0	4.8	4.8	4.8	4.8		0.7	28.0	4.8	4.8	4.8	4.8	4.8	0.5	
30.0	4.8	4.8	4.8	4.8		0.5	30.0	4.8	4.8	4.8	4.8	4.8	0.5	

A = Boom length
B = Working radius

WORKING RADIUS - LIFTING HEIGHT

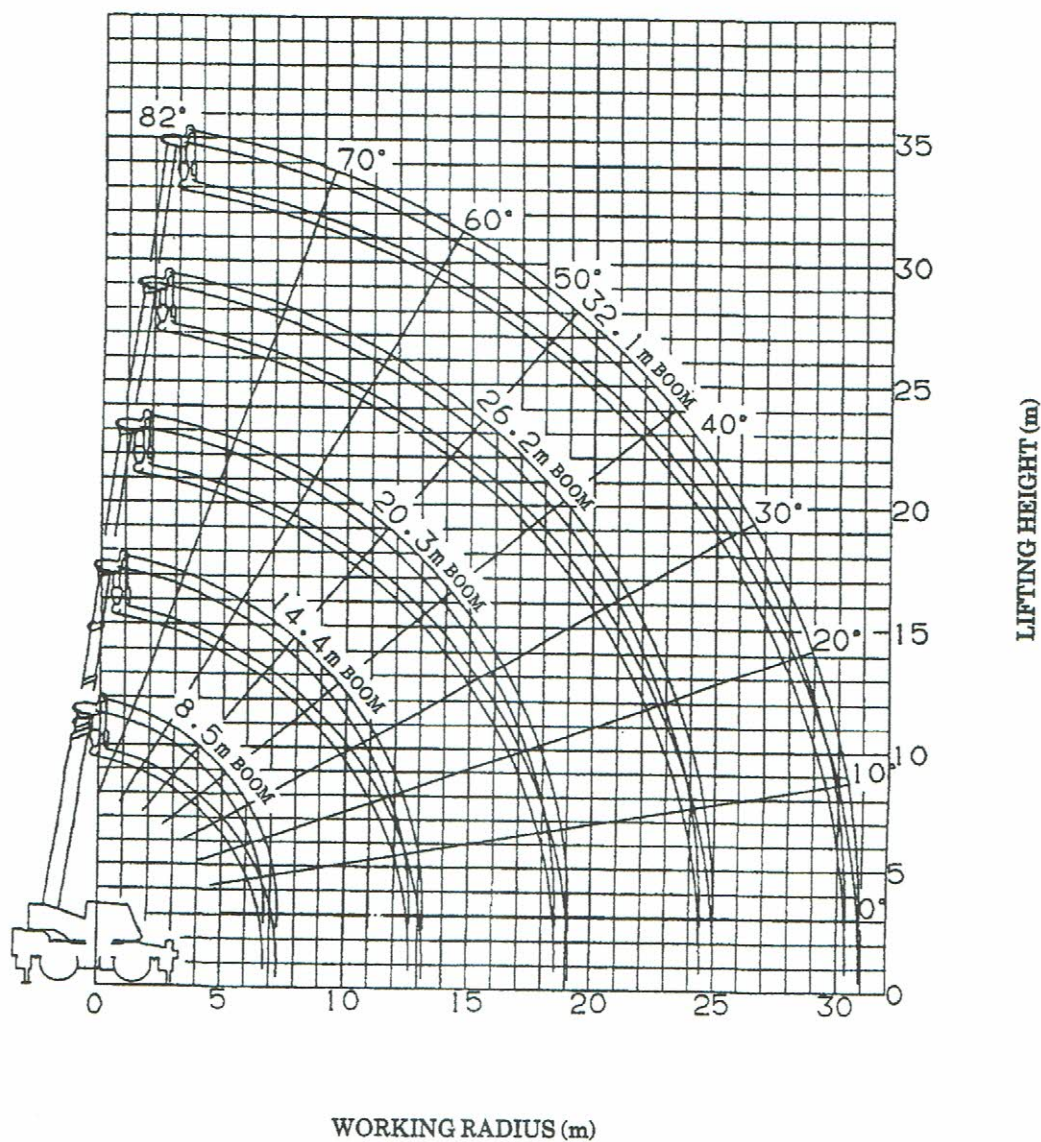

NOTES:

1. The deflection of the boom is not incorporated in the figure above.
2. The figure above is for the case when the outriggers are fully extended (360°).

DIMENSIONS (1/100)

