


CC 6800-1

**Crawler Crane
1375 USt Capacity**

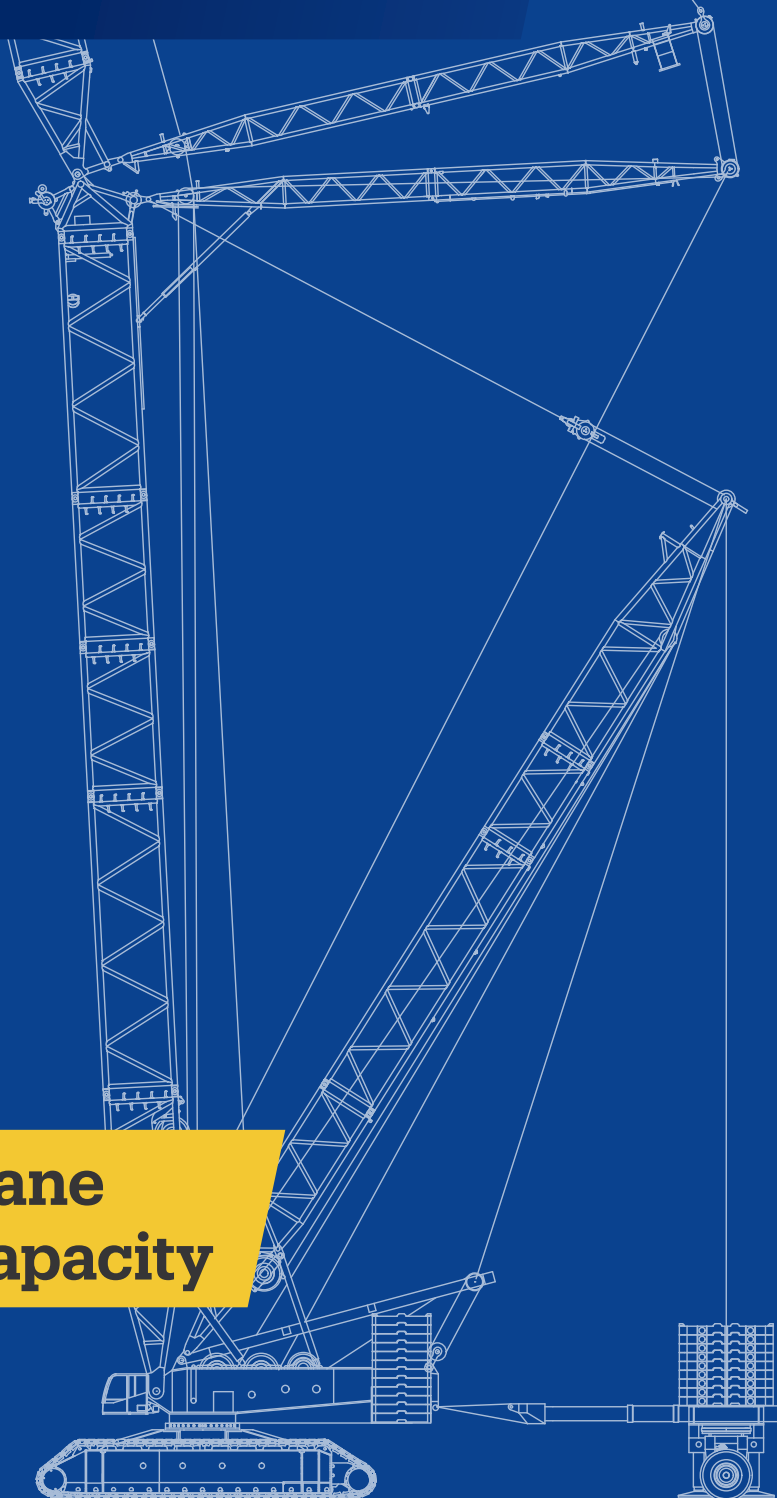

DEMAG®
TADANO GROUP

	Page:
Specifications.....	5
Superlift configurations	10
Specifications	11
Erection / lowering	13
Boom combinations	14
Main boom (SH, SH/LH, LH)	18
Main boom with SL (SSL, SSL / LSL, SSL / LSL S1).....	22
Fixed fly jib (SH+LF).....	30
Fixed fly jib (SH/LH+LF).....	34
Fixed fly jib (SH/LH+LF3-S3)	44
Fixed fly jib with SL (SSL+LF, SSL / LSL S1+LF)	48
Luffing fly jib (SW)	70
Luffing fly jib with SL (SWSL / SFSL 15°).....	76
Fixed fly jib with SL (SFVL / LFVL).....	104
Technical description.....	106



Track



Counterweight + central ballast (ZB)



Superlift counterweight



Superlift radius



Possible load of hook block



Weight of hook block



Load radius



Main boom



Fly jib



Main boom angle



Fly jib angle



Wind speed in ft/s (feet per second)

„D“



S: heavy

L: light

H/HA: Main boom

HI: Luffing jib

W: Luffing fly jib

F: Fixed fly jib

SL: Superlift

V: Vessellift

SGL: Heavy base length



Central ballast

- ▶ Excellent lifting capacities throughout all working ranges, especially with luffing fly jib
- ▶ Max. load moment 114.700 ft-kips (2185,000 lb@52.5 ft)
- ▶ Two redundant operating drivelines
- ▶ Highly simplified assembly processes for short rigging times
- ▶ Hydraulic quick-connection
- ▶ Innovative IC-1 crane control system with touchscreen
- ▶ Superlift radius infinitely variable during operation from 49.2–78.7 ft (+ 78.7–98.4 ft)
- ▶ Variable offset of main boom with SW and SWSL configurations
- ▶ Powerful Quadro-Drive as standard
- ▶ Hydraulic assisted pinning of boom sections is standard
- ▶ PC outrigger optional



Working speeds (infinitely variable)

Mechanism		Rope ø	Speeds ¹⁾	Single line pull	Length of hoist rope
Hoist I+II	(H1+H2)	32 mm	max. 361 ft / min	51.700 lbf	4068 ft
Hoist III	(H3)	32 mm	max. 328 ft / min	51.700 lbf	2297 ft
Boom derricking	(W2)	32 mm	max. 361 ft / min		
Boom hoist	(E)	32 mm	max. 164 ft / min		
Jib luffing	(W1)	32 mm	max. 344 ft / min		
Slewing (rpm)			1,2		

¹⁾ top layer

Carrier performance

Travel speed	max. 0.68 mph
--------------	---------------

Hook block system


Type	Possible load	Number of sheaves	Number of lines	Weight	„D“
2 x 625	2756,200 lb	2 x 15	2 x 31	64,000 lb	25.9 ft
	1389,200 lb	2 x 7	2 x 15	41,900 lb	19.4 ft
	1389,200 lb	15	31	41,900 lb	19.4 ft
	727,700 lb	7	15	19,800 lb	19.4 ft
1000	2205,000 lb	2 x 11	2 x 23	39,700 lb	22.0 ft
	1102,500 lb	2 x 5	2 x 11	24,300 lb	23.6 ft (21.3 ft*)
	1102,500 lb	11	23	17,600 lb	23.6 ft (21.3 ft*)
	551,200 lb	5	11	16,800 lb (12,800 lb*)	23.6 ft (19.7 ft*)
800	1764,000 lb	2 x 11	2 x 19	35,300 lb	21.3 ft
	1102,500 lb	2 x 5	2 x 11	24,300 lb	23.6 ft (21.3 ft*)
	1102,500 lb	11	23	17,600 lb	23.6 ft (21.3 ft*)
	551,200 lb	5	11	16,800 lb (12,800 lb*)	23.6 ft (19.7 ft*)



* with optional equipment 1102,500 lb hook


Hook block

Type	Possible load	Number of sheaves	Number of lines	Weight	„D“
2 x 125	551,200 lb	2 x 3	2 x 6	10,600 lb – 26,200 lb	17.7 ft
2 x 95	418,900 lb	2 x 2	2 x 4	6,400 lb – 18,500 lb	17.7 ft
70	154,300 lb	1	3	8,600 lb	15.8 ft
25	50,700 lb	Single line hook	1	3,300 lb	13.1 ft


Basic crane dimensions

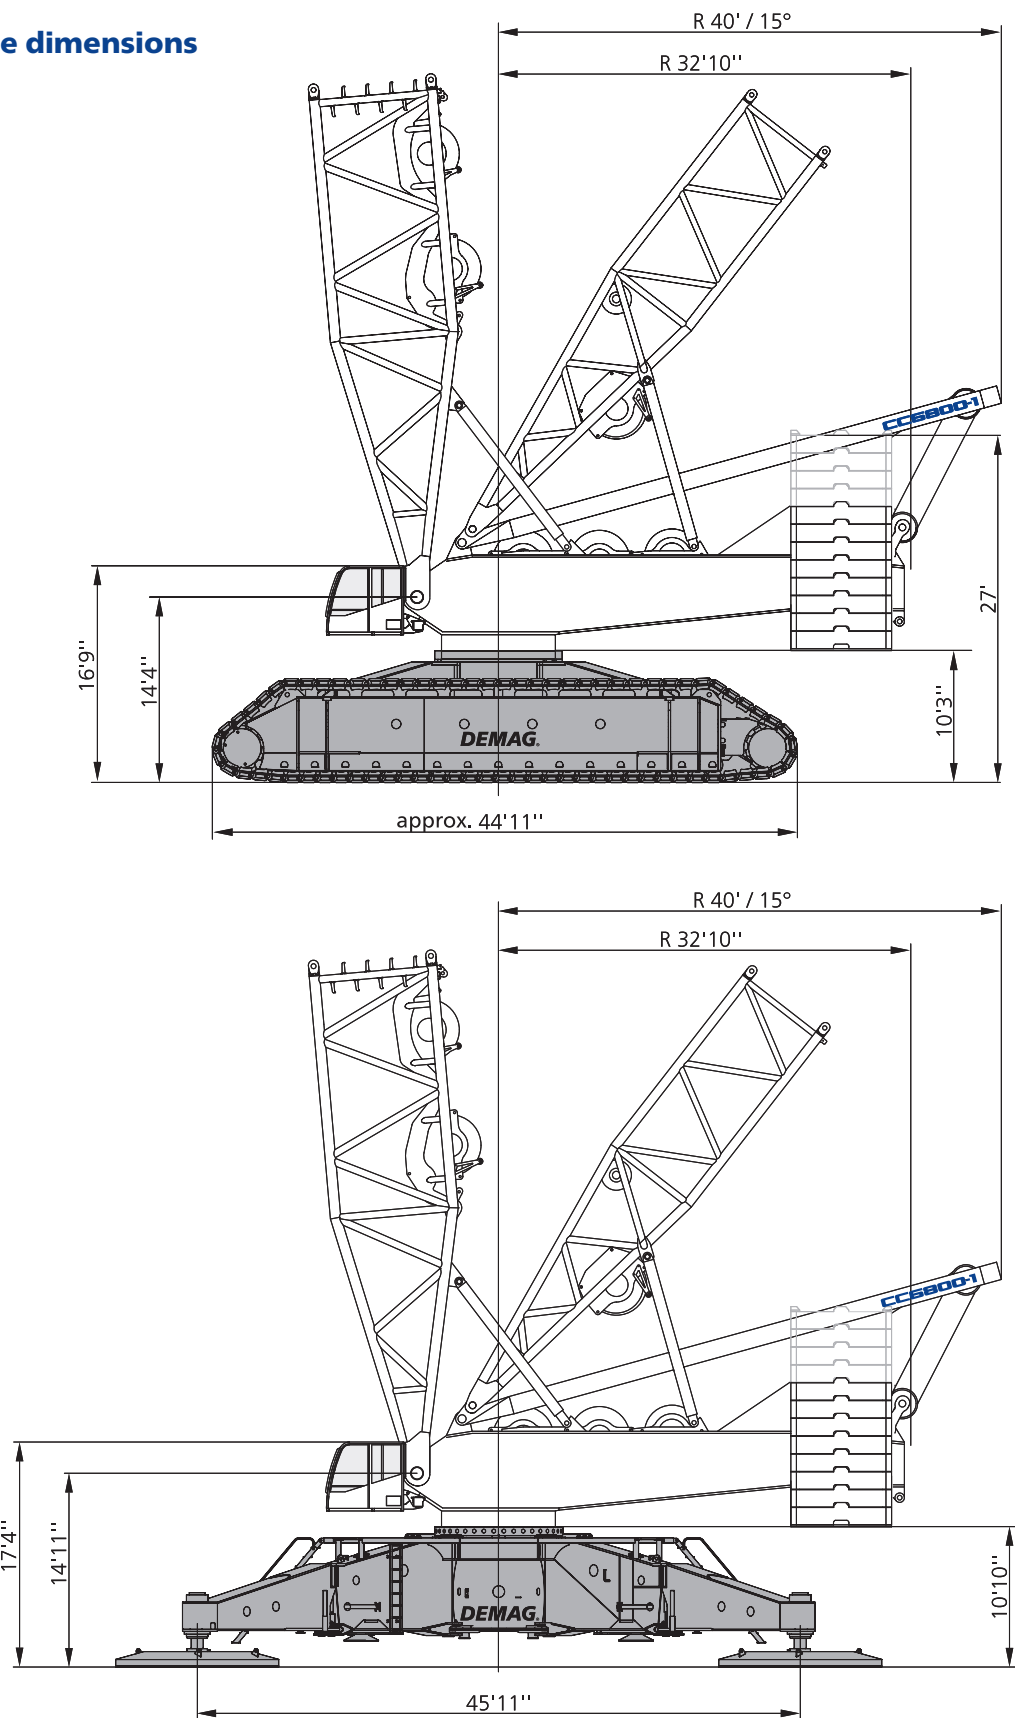

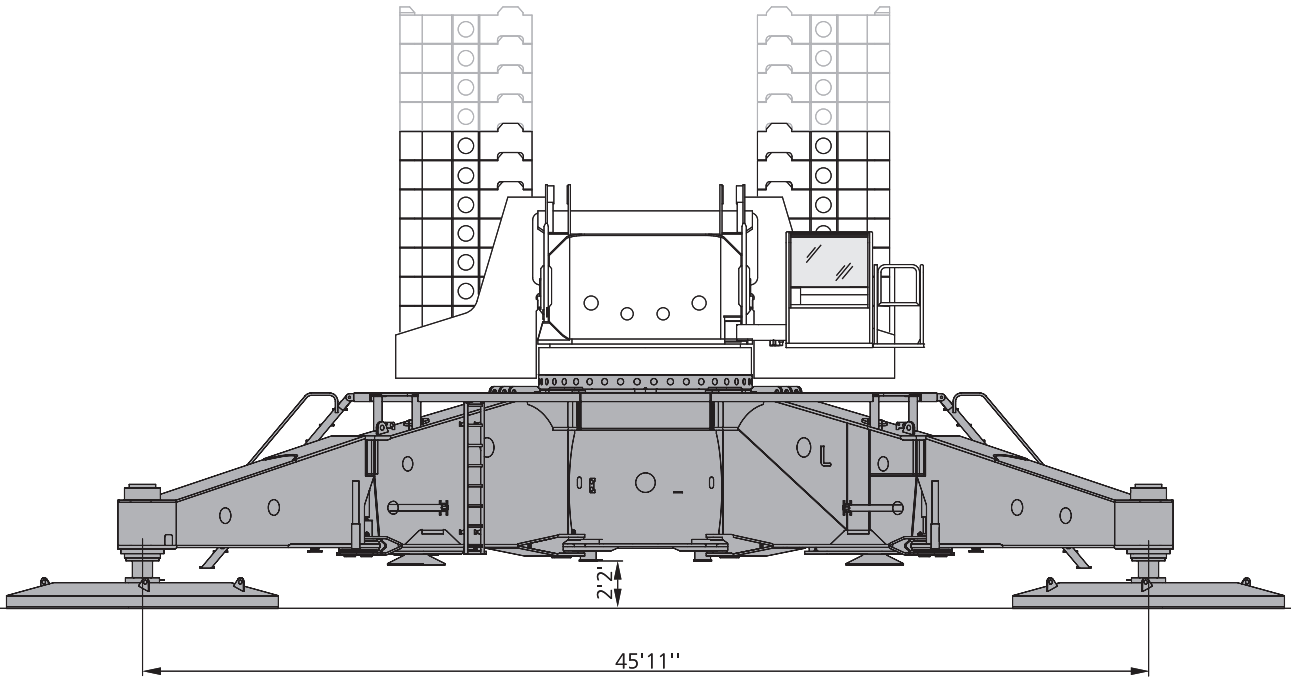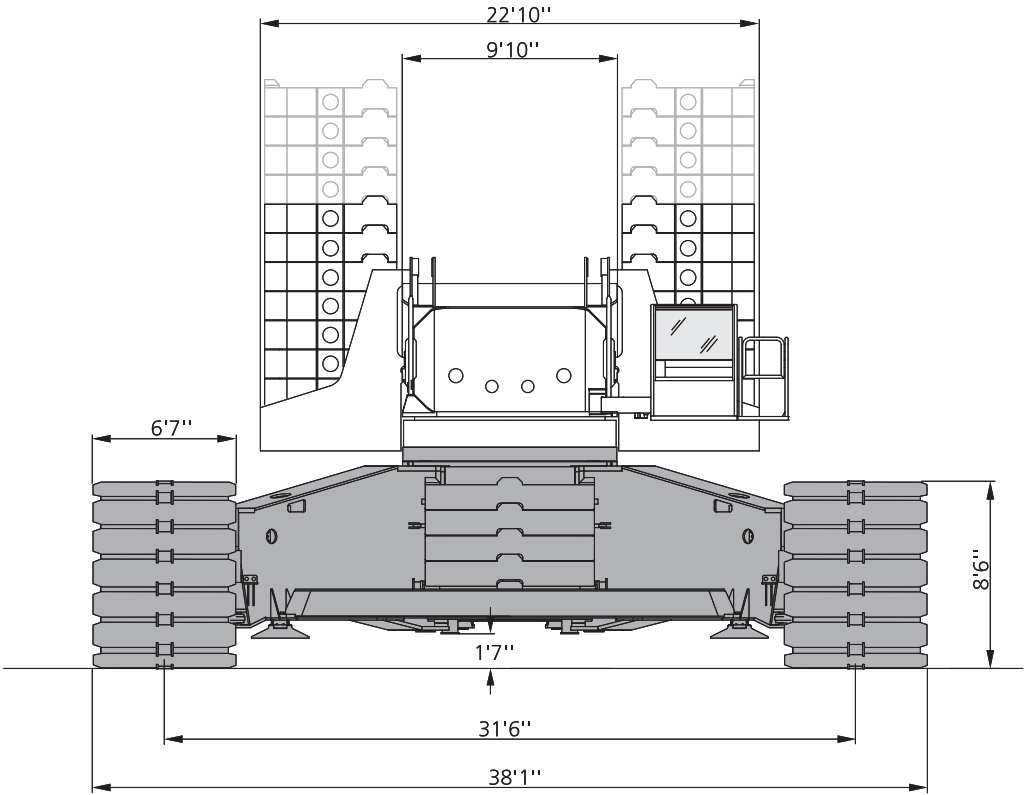


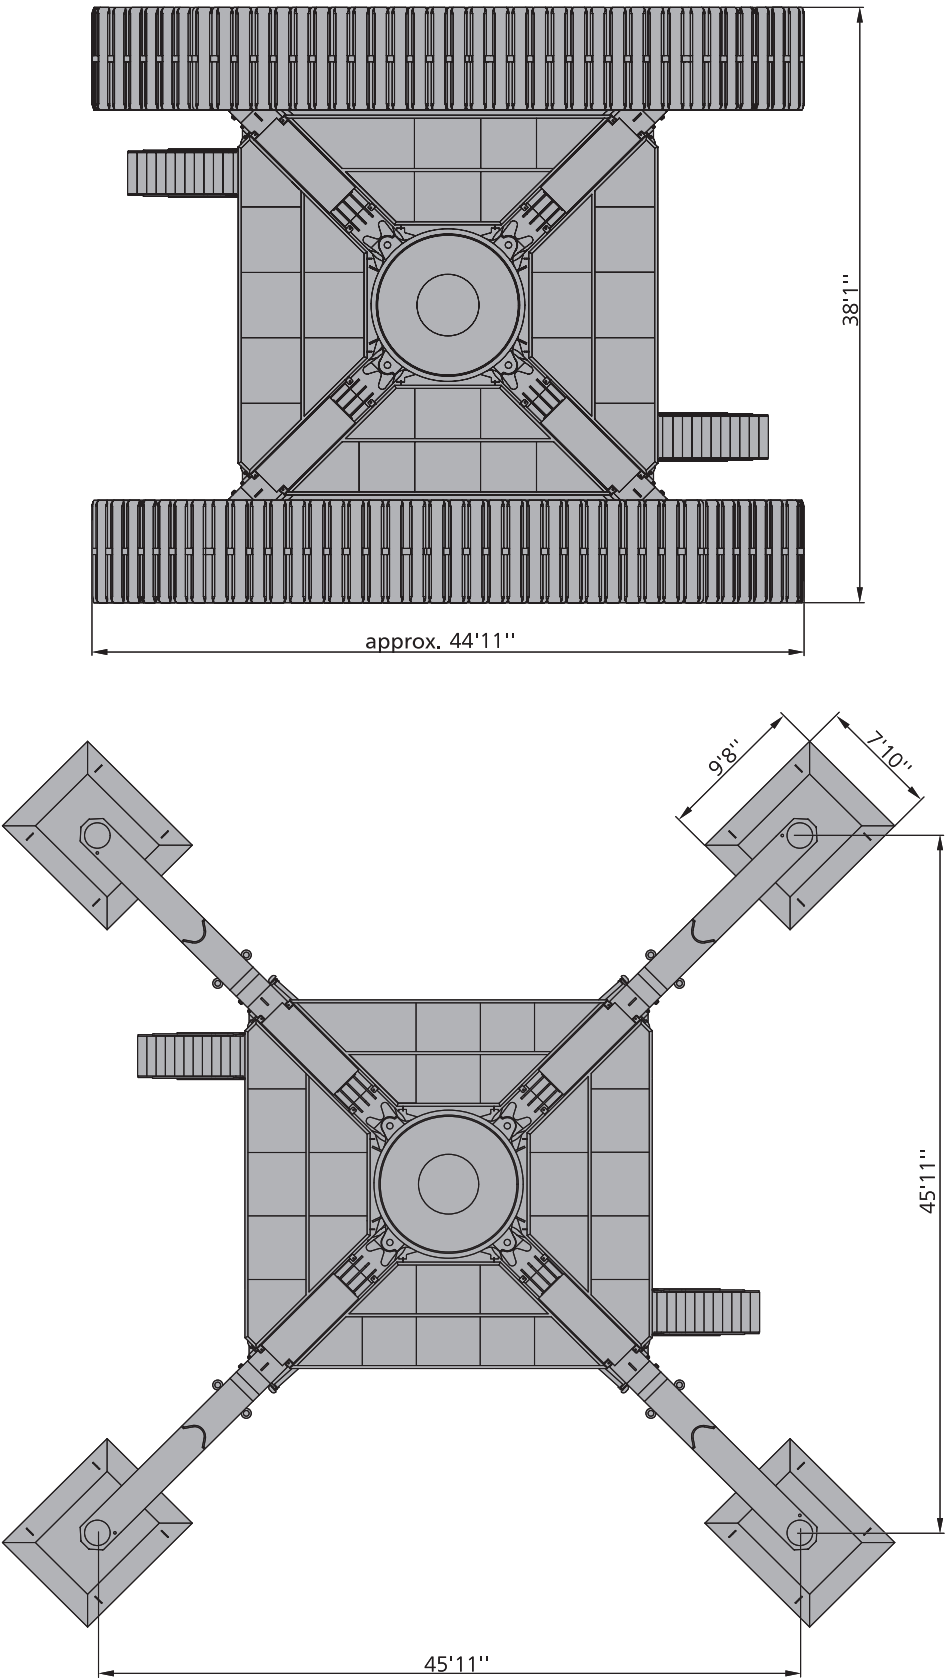

Standard-SL

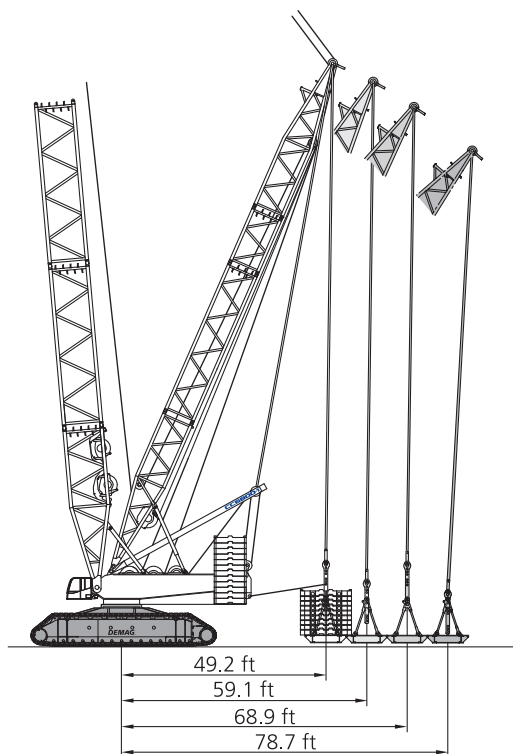


Vario-SL

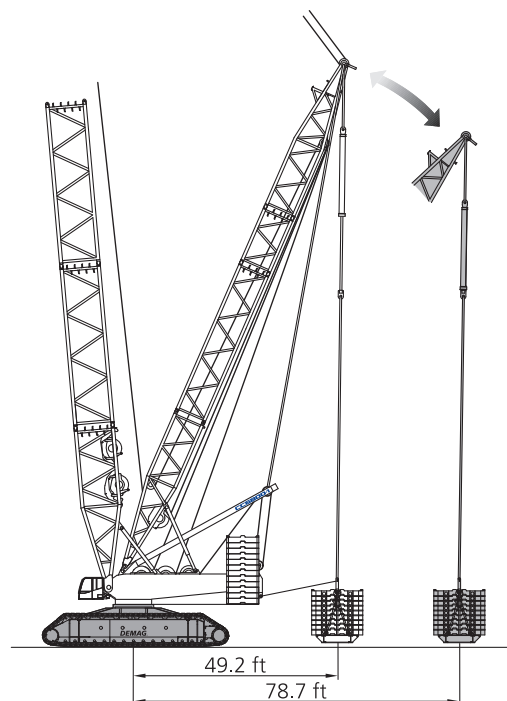


SL Carrier

R 68.9 ft

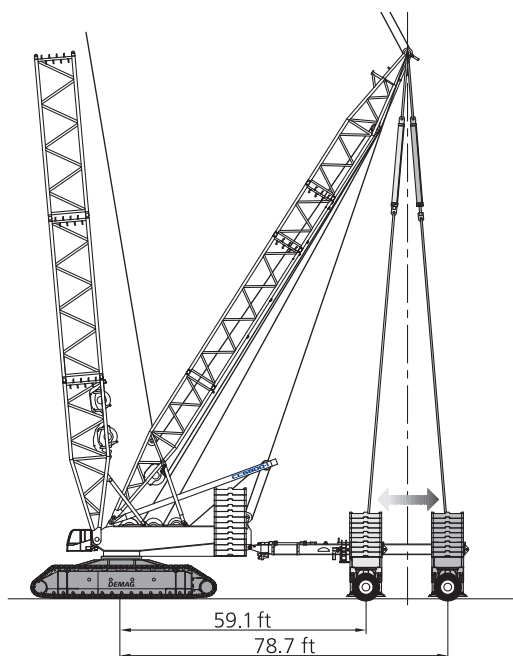

R 78.7 ft

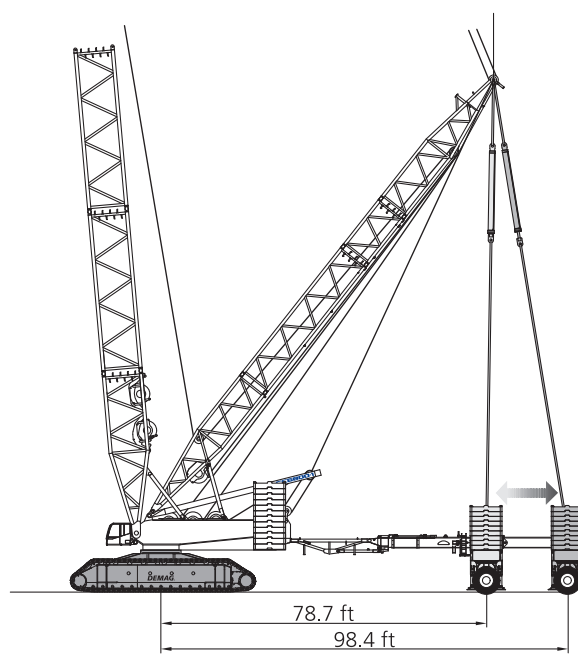


Alternatively, the telescope connector may be used in combination with the Superlift Tray

Weights

Total weight incl. 374,800 lb counterweight, 118.1 ft boom and hook block	1234,800 lb
Superstructure (with 3 winches, A-frame and quick-connection)	218,300 lb
Superstructure without winches and A-frame	119,000 lb
Carbody with jacks and quick-connection	105,800 lb
Crawlers with track shoes (6' 7")	154,300 lb
Crawlers without track shoes	83,800 lb
Counterweight	374,800 lb

Counterweight





Central ballast

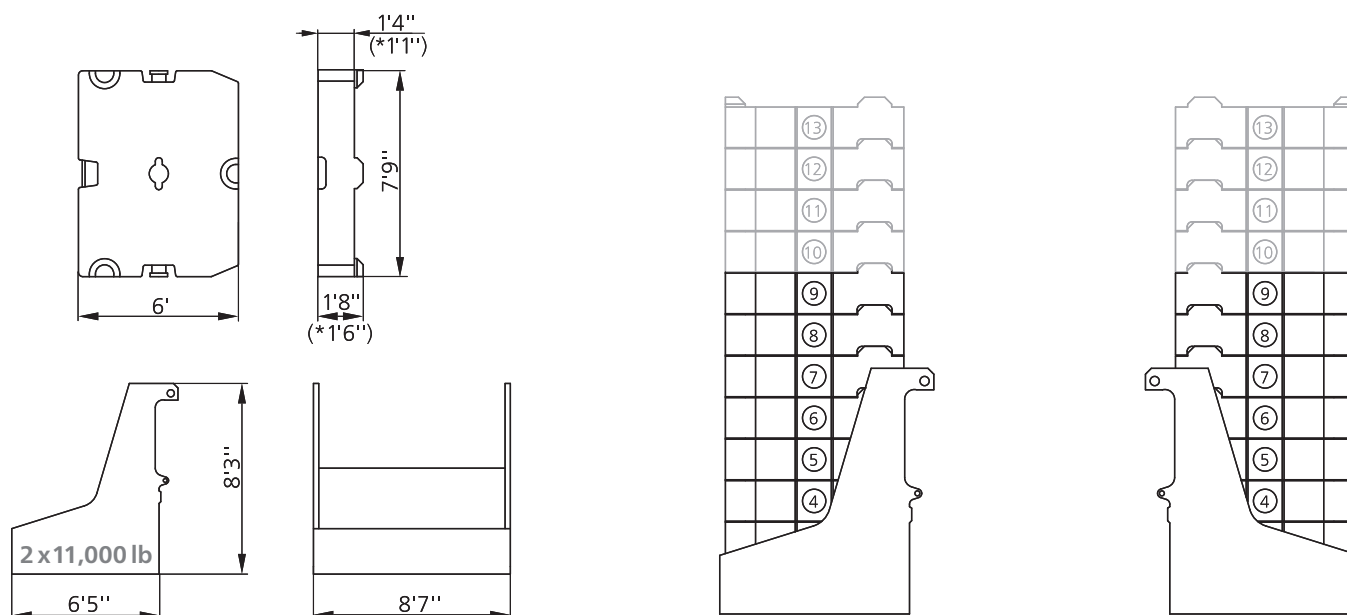



* Option

Specifications





CC 6800-1

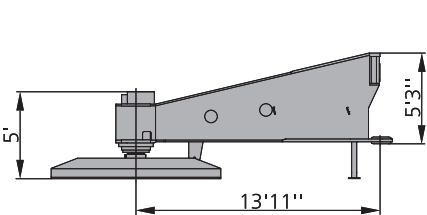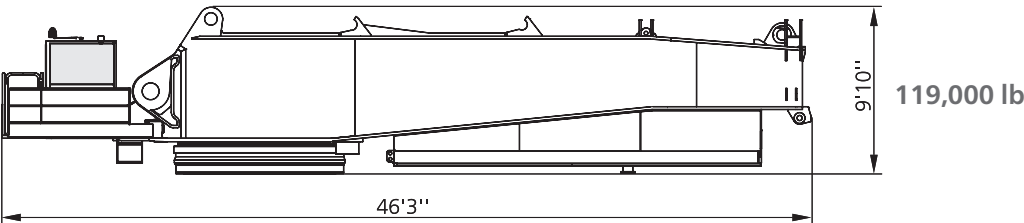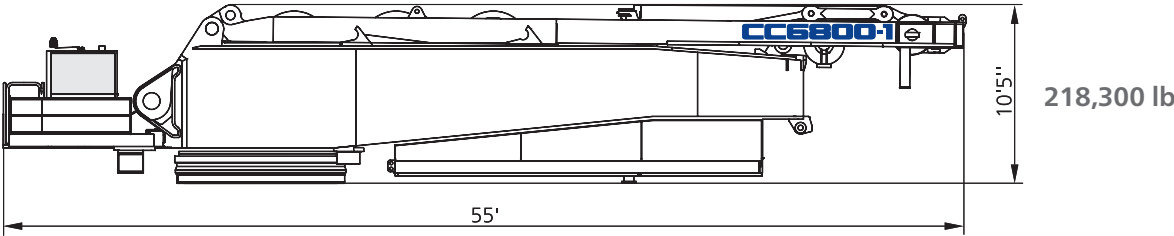

4 x 17,600 lb

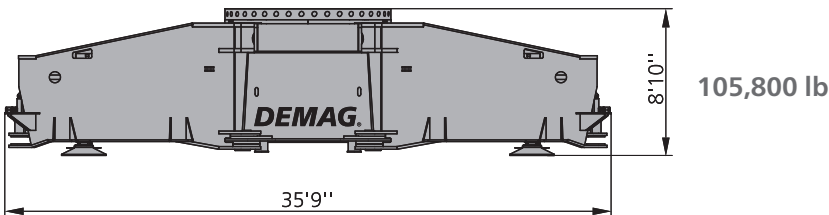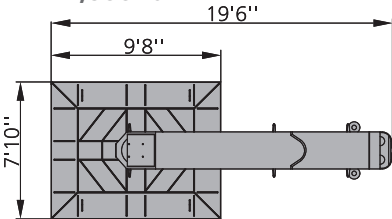

2 x 154,300 lb

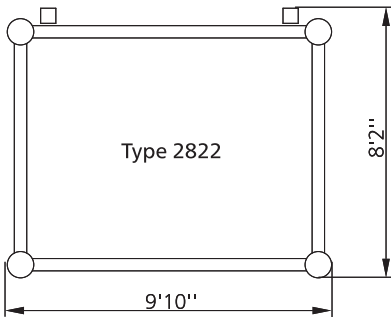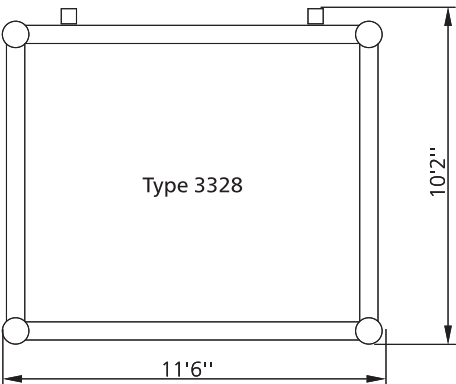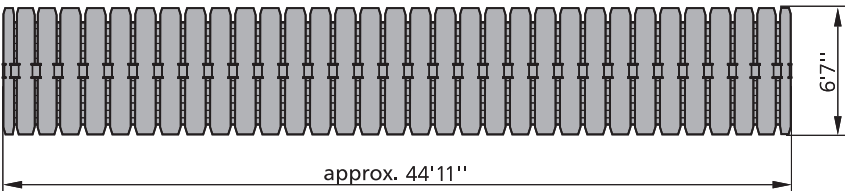

S3: Add. 2420A (2570 x 2275)

LF3: 2016B (2235 x 1850)

Erection / lowering of the CC 6800-1 boom systems to the ground

374,800 – 551,200 lb + 0–176,400 lb															
Boom combination	Fly jib	Main boom (ft)													
		118.1	137.8	157.5	177.2	196.9	216.5	236.2	255.9	275.6	295.3	315.0	334.6	354.3	374.0
SH		X	X	X	X	X	X	X	[X]	[X]	[X]	[X]	–	–	–
SH+LF	49.2 ft	–	–	–	–	–	[X]	[X]	[X]	–	–	–	–	–	–
	68.9 ft	–	–	–	–	–	[X]	[X]	[X]	–	–	–	–	–	–
	88.6 ft	–	–	–	–	–	[X]	[X]	[X]	–	–	–	–	–	–
	108.3 ft	–	–	–	–	–	[X]	[X]	[X]	–	–	–	–	–	–
SH / LH		–	–	X	X	X	X	X	X	X	X	[X]	[X]	[X]	–
SH / LH+LF	49.2 ft	–	–	X	X	X	X	X	[X]	[X]	[X]	–	–	–	–
	68.9 ft	–	–	X	X	X	X	[X]	[X]	[X]	[X]	–	–	–	–
	88.6 ft	–	–	X	X	X	X	[X]	[X]	[X]	[X]	–	–	–	–
	108.3 ft	–	–	X	X	X	[X]	[X]	[X]	[X]	[X]	–	–	–	–
LH		–	–	X	X	X	X	X	X	X	X	X	X	[X]	[X]
SW 65°, 75°, 85°, 87°	78.7 ft	–	X	X	[X]	[X]	–	–	–	–	–	–	–	–	–
	98.4 ft	–	X	X	[X]	[X]	–	–	–	–	–	–	–	–	–
	118.1 ft	–	X	X	[X]	[X]	–	–	–	–	–	–	–	–	–
	137.8 ft	–	X	X	X	[X]	–	–	–	–	–	–	–	–	–
	157.5 ft	–	X	X	X	[X]	–	–	–	–	–	–	–	–	–
	177.2 ft	–	X	X	X	[X]	–	–	–	–	–	–	–	–	–
	196.9 ft	–	X	X	[X]	[X]	–	–	–	–	–	–	–	–	–
	216.5 ft	–	X	X	[X]	[X]	–	–	–	–	–	–	–	–	–
	236.2 ft	–	X	X	[X]	–	–	–	–	–	–	–	–	–	–
	255.9 ft	–	X	X	[X]	–	–	–	–	–	–	–	–	–	–
	275.6 ft	–	X	X	[X]	–	–	–	–	–	–	–	–	–	–
	295.3 ft	–	X	X	[X]	–	–	–	–	–	–	–	–	–	–
	315.0 ft	–	X	X	[X]	–	–	–	–	–	–	–	–	–	–
		ft 321.5 331.4 341.2 351.1 360.9 370.7 380.6 390.4													
SH / LH+LF3_S3	49.2 ft							[X]	[X]	[X]	[X]	[X]	[X]	[X]	[X]
	68.9 ft							[X]	[X]	[X]	[X]	[X]	[X]	–	–


X without assisting equipment

[X] with additional side jack



All Superlift combinations can be erected or lowered to the ground without assisting equipment.

Boom Combinations


CC 6800-1




* Attachable

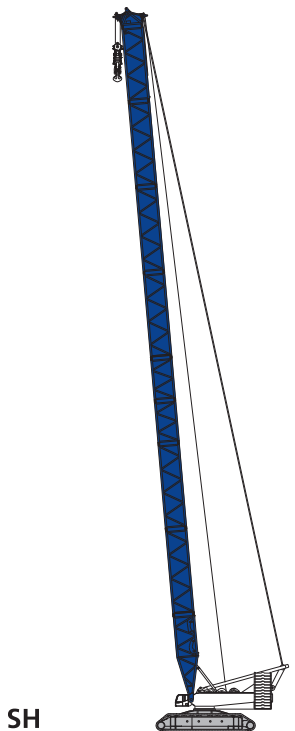

SH
HA 98.4 ft .. 315.0 ft

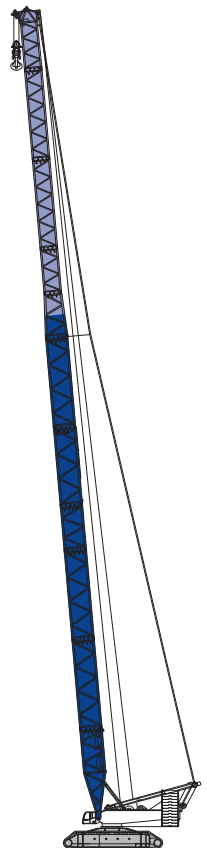


SH/LH
HA 157.5 ft .. 354.3 ft
LH
HA 137.8 ft .. 374.0 ft

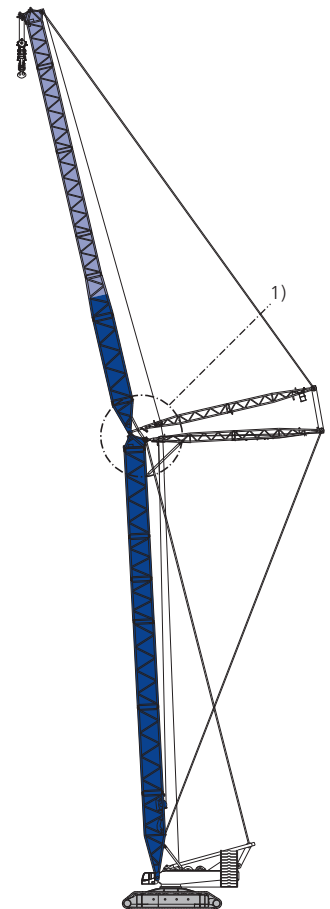



SW
HA 98.4 ft .. 196.9 ft
HI 98.4 ft .. 315.0 ft
max. 177.2 ft + 315.0 ft
196.9 ft + 216.5 ft

Boom Combinations

CC 6800-1




* Attachable

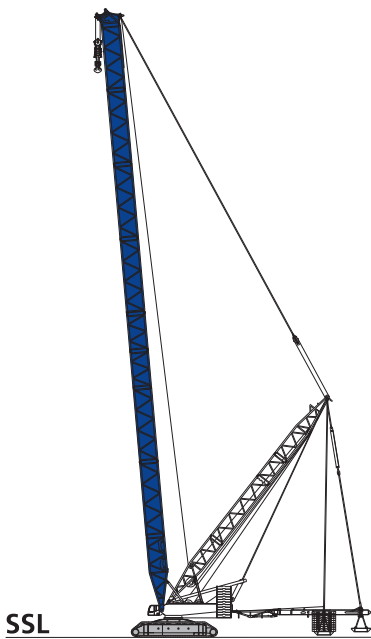

SSL

HA 137.8 ft .. 315.0 ft

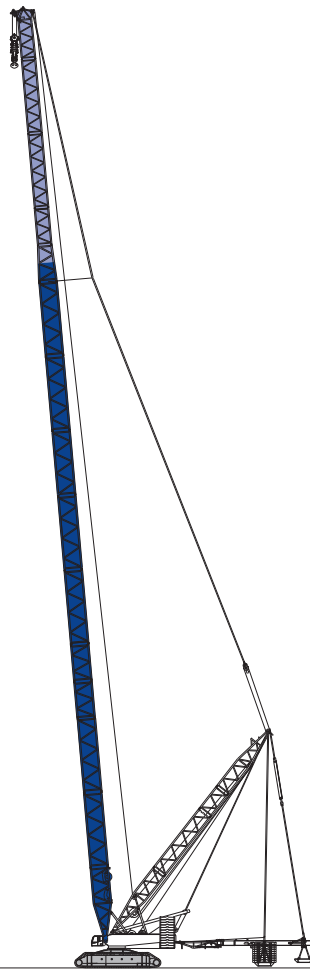


SSL/LSL

HA 334.6 ft .. 492.1 ft

SSL/LSL S1

HA 216.5 ft .. 511.8 ft

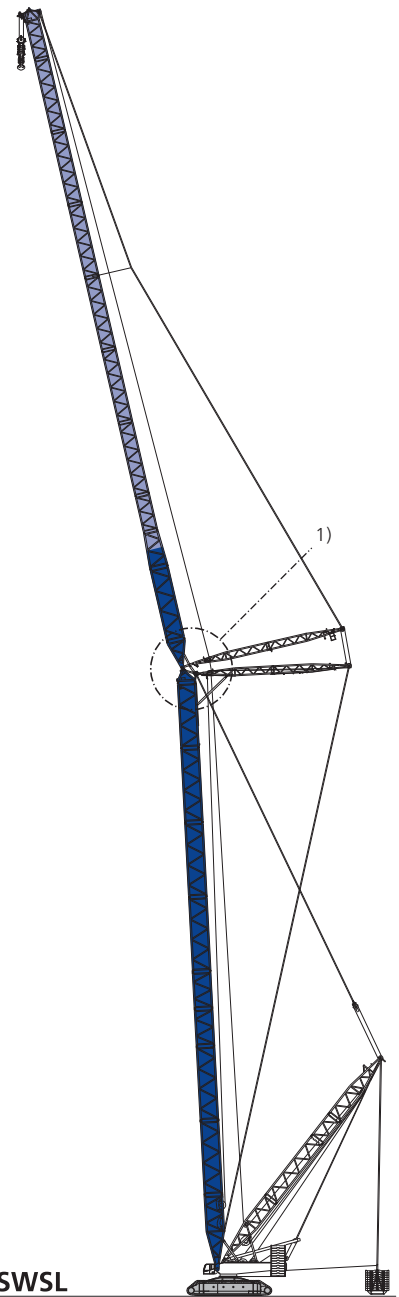


SWSL

HA 157.5 ft .. 315.0 ft



HI 98.4 ft .. 354.3 ft

Boom Combinations

CC 6800-1

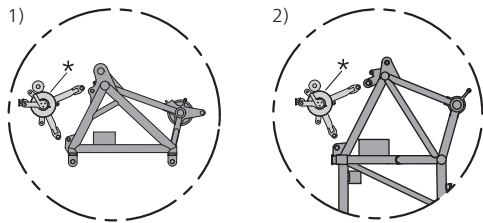


* Attachable

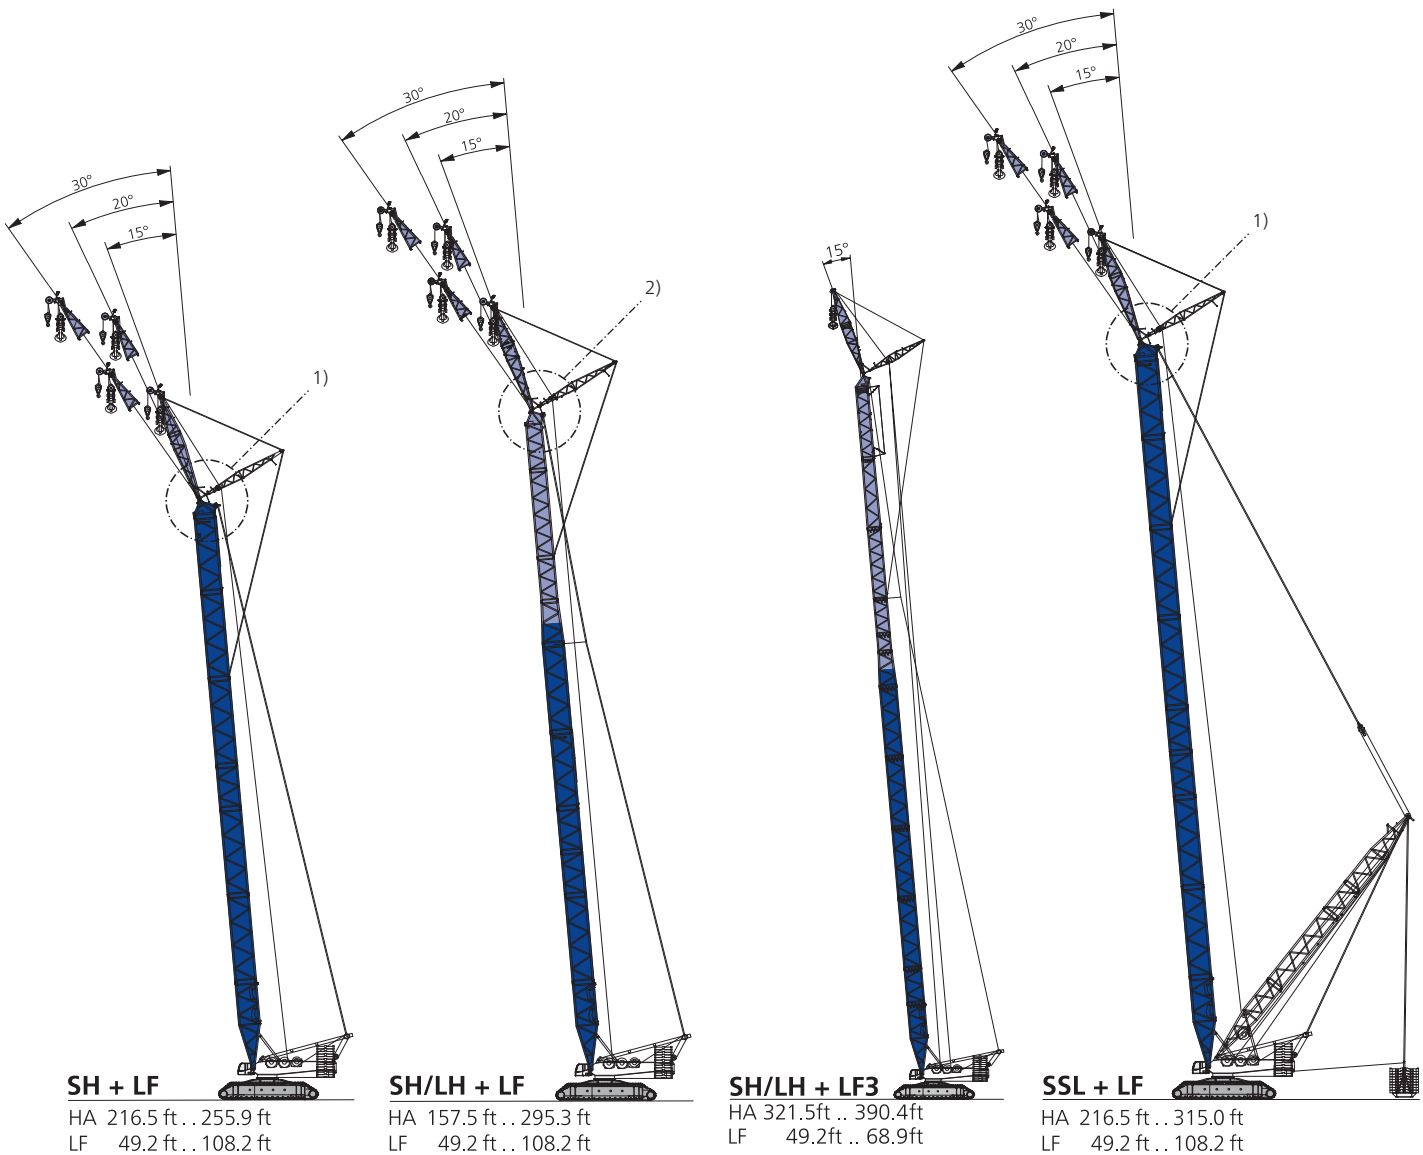



Boom Combinations

CC 6800-1

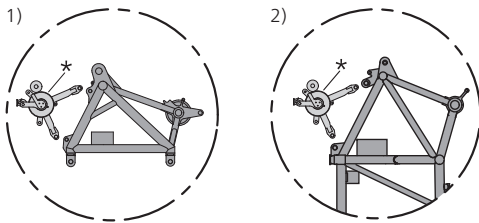


* Attachable

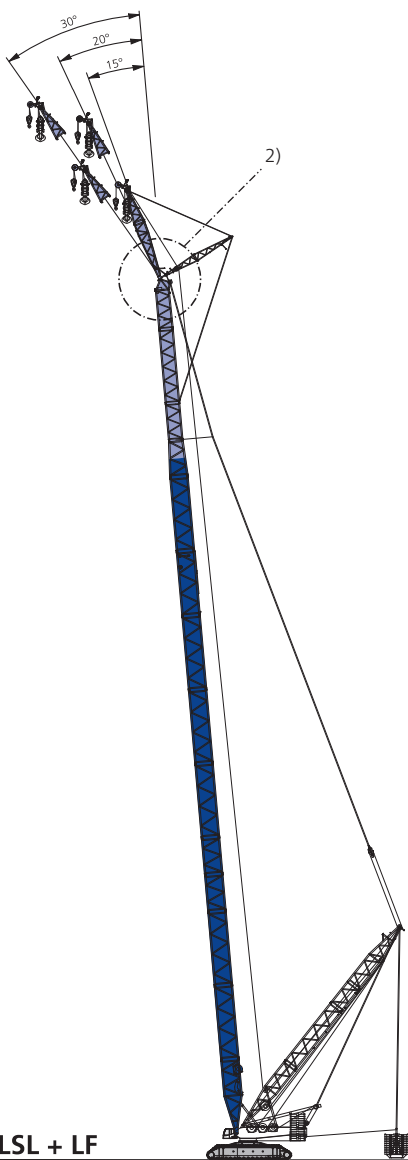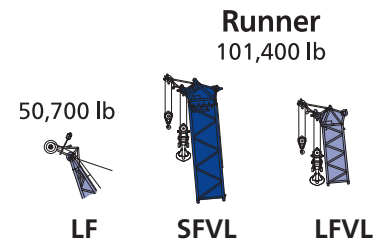

SSL/LSL + LF


HA 334.6 ft .. 492.1 ft
LF 49.2 ft .. 108.2 ft

SSL/LSL S1 + LF
HA 216.5 ft .. 492.1 ft
LF 49.2 ft .. 108.2 ft

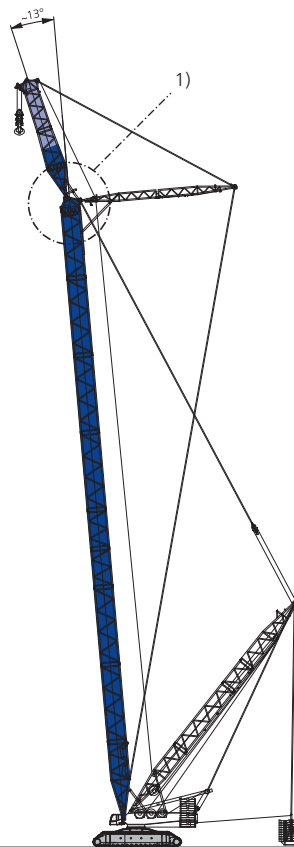

LFVL


HA 157.5 ft .. 315.0 ft

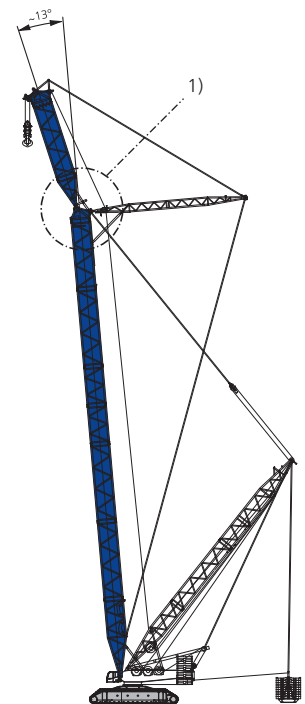

SFVL

HA 157.5 ft .. 236.2 ft

DEMAG
TADANO GROUP

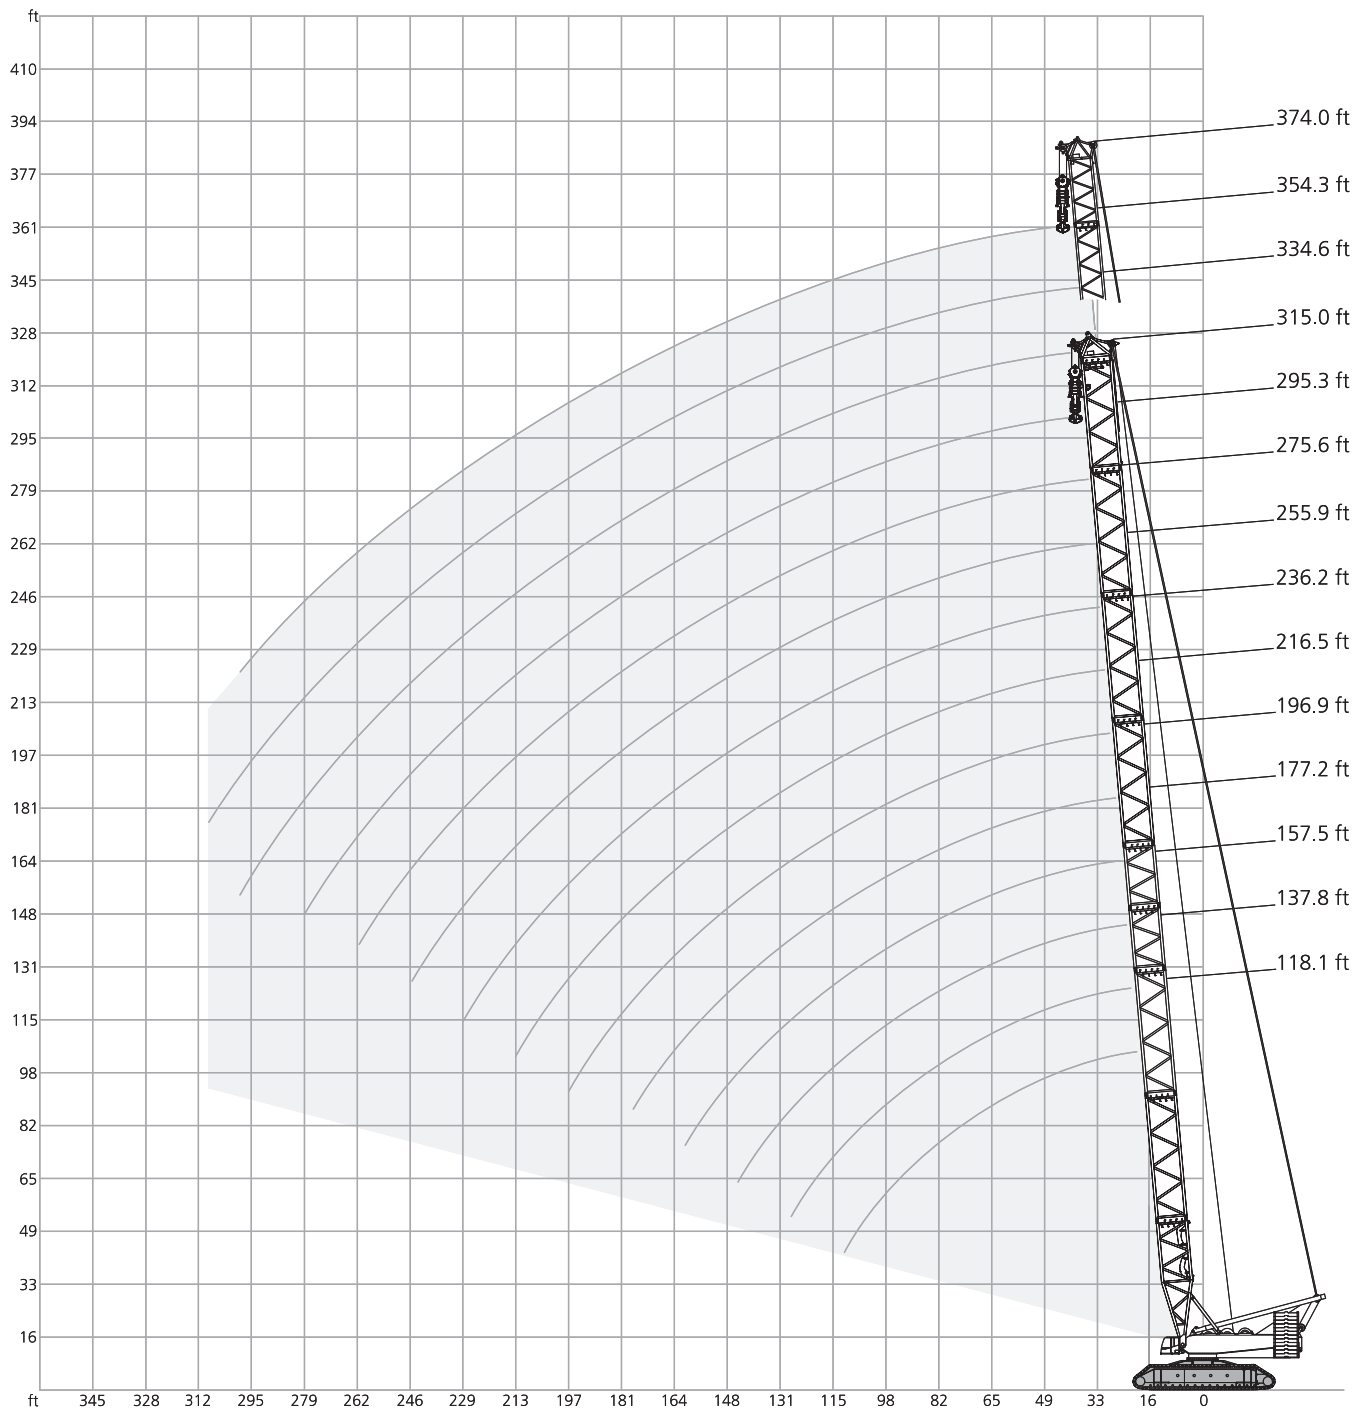

  31.50 ft  32.2 ft/s 360° 75%													
  118.1 ft 137.8 ft 157.5 ft 177.2 ft 196.9 ft 216.5 ft 236.2 ft 255.9 ft 275.6 ft 295.3 ft 315.0 ft 													
ft	1,000 lb												ft
23.0	1743.9	-	-	-	-	-	-	-	-	-	-	-	23.0
26.2	1534.4	1523.4	1501.3	-	-	-	-	-	-	-	-	-	26.2
29.5	1366.9	1358.0	1305.1	1225.8	-	-	-	-	-	-	-	-	29.5
32.8	1232.4	1221.4	1153.0	1086.9	1027.4	972.2	-	-	-	-	-	-	32.8
36.1	1117.7	1089.1	1029.6	974.4	923.7	877.4	833.3	793.7	-	-	-	-	36.1
39.4	1011.9	978.9	928.1	881.8	837.8	798.1	760.6	725.3	690.0	659.2	-	-	39.4
42.7	921.5	888.5	844.4	804.7	767.2	731.9	696.7	665.8	634.9	608.5	551.2	-	42.7
45.9	844.4	811.3	773.8	738.5	703.3	674.6	643.8	615.1	586.4	562.2	535.7	-	45.9
52.5	709.9	690.0	659.2	630.5	604.1	577.6	553.4	531.3	507.1	485.0	463.0	-	52.5
59.1	588.6	584.2	571.0	549.0	524.7	504.9	482.8	463.0	443.1	423.3	405.7	-	59.1
65.6	500.4	496.0	491.6	482.8	460.8	443.1	425.5	407.9	390.2	372.6	357.1	-	65.6
72.2	434.3	427.7	423.3	418.9	410.1	394.6	377.0	361.6	346.1	330.7	315.3	-	72.2
78.7	379.2	374.8	368.2	363.8	359.4	352.7	337.3	324.1	308.6	295.4	280.0	-	78.7
85.3	337.3	330.7	326.3	321.9	317.5	313.1	304.2	291.0	277.8	264.6	251.3	-	85.3
91.9	302.0	295.4	291.0	284.4	280.0	277.8	273.4	262.4	249.1	238.1	224.9	-	91.9
98.4	273.4	266.8	260.1	255.7	251.3	246.9	244.7	238.1	224.9	215.0	202.8	-	98.4
111.5	227.1	220.5	213.8	208.3	203.9	200.6	196.2	191.8	185.2	175.3	164.2	-	111.5
124.7	-	185.2	178.6	173.1	167.6	164.2	158.7	154.3	148.8	144.4	133.4	-	124.7
128.0	-	178.6	171.4	165.9	159.8	156.0	151.0	146.1	140.5	136.1	126.8	-	128.0
137.8	-	-	152.1	146.1	138.9	134.5	129.5	124.6	118.3	113.5	107.0	-	137.8
144.4	-	-	140.0	133.4	125.7	121.3	115.7	111.3	105.6	101.2	93.9	-	144.4
150.9	-	-	-	122.9	115.6	111.0	105.2	100.5	94.6	90.1	82.2	-	150.9
160.8	-	-	-	108.9	101.3	95.9	90.4	85.3	78.8	74.4	67.1	-	160.8
164.0	-	-	-	-	96.9	91.7	86.0	80.8	74.1	69.9	62.5	-	164.0
177.2	-	-	-	-	81.6	76.2	69.4	64.4	58.0	53.1	45.4	-	177.2
190.3	-	-	-	-	-	63.1	56.2	50.6	43.7	39.0	31.6	-	190.3
196.9	-	-	-	-	-	57.1	50.0	44.3	37.5	32.6	25.1	-	196.9
203.4	-	-	-	-	-	-	44.9	38.8	32.1	27.0	19.4	-	203.4
206.7	-	-	-	-	-	-	42.3	36.2	29.4	24.2	16.5	-	206.7
213.3	-	-	-	-	-	-	37.5	31.3	24.4	19.0	-	-	213.3
216.5	-	-	-	-	-	-	-	29.0	22.0	16.5	-	-	216.5
223.1	-	-	-	-	-	-	-	24.5	17.4	-	-	-	223.1
229.7	-	-	-	-	-	-	-	20.5	-	-	-	-	229.7

 551,200 lb
 176,400 lb

  31.50 ft  32.2 ft/s 360° 75%													
  157.5 ft 177.2 ft 196.9 ft 216.5 ft 236.2 ft 255.9 ft 275.6 ft 295.3 ft 315.0 ft 334.6 ft 354.3 ft 													
ft	1,000 lb												ft
26.2	1115.5	-	-	-	-	-	-	-	-	-	-	-	26.2
29.5	1115.5	1115.5	1115.5	-	-	-	-	-	-	-	-	-	29.5
32.8	1115.5	1104.5	1045.0	994.3	945.8	-	-	-	-	-	-	-	32.8
36.1	1031.8	1003.1	951.3	908.3	866.4	822.3	787.1	-	-	-	-	-	36.1
39.4	948.0	901.7	857.6	822.3	787.1	754.0	723.1	694.5	661.4	-	-	-	39.4
42.7	870.8	830.0	791.5	759.5	728.6	700.0	672.4	646.0	616.2	590.8	533.5	42.7	42.7
45.9	793.7	758.4	725.3	696.7	670.2	646.0	621.7	597.5	571.0	551.2	531.3	45.9	45.9
52.5	681.2	652.6	623.9	604.1	579.8	560.0	540.1	522.5	498.2	482.8	467.4	52.5	52.5
59.1	593.0	568.8	546.7	529.1	511.5	493.8	478.4	463.0	440.9	427.7	414.5	59.1	59.1
65.6	509.3	504.9	485.0	469.6	454.2	438.7	425.5	412.3	392.4	381.4	370.4	65.6	65.6
72.2	448.6	444.2	432.1	424.4	411.2	397.9	385.8	373.7	356.0	345.0	335.1	72.2	72.2
78.7	388.0	383.6	379.2	379.2	368.2	357.1	346.1	335.1	319.7	308.6	299.8	78.7	78.7
85.3	349.4	343.9	339.5	339.5	334.0	326.3	316.4	306.4	292.1	282.2	274.5	85.3	85.3
91.9	310.9	304.2	299.8	299.8	299.8	295.4	286.6	277.8	264.6	255.7	249.1	91.9	91.9
98.4	283.3	276.7	272.3	272.3	271.2	269.0	263.5	255.7	242.5	235.3	229.3	98.4	98.4
111.5	235.3	228.7	224.3	223.8	222.1	221.6	219.4	215.5	203.9	198.4	192.9	111.5	111.5
124.7	199.5	192.9	187.9	187.4	185.7	184.6	182.4	181.3	172.5	168.1	163.1	124.7	124.7
137.8	172.5	166.1	160.2	159.8	157.6	156.5	154.3	152.9	144.8	141.5	137.8	137.8	137.8
144.4	160.9	154.7	148.4	147.7	145.5	144.4	142.2	140.4	131.9	128.6	125.7	144.4	144.4
150.9	-	143.3	136.7	135.6	133.4	132.3	130.1	127.9	119.0	115.7	113.5	150.9	150.9
160.8	-	130.1	124.0	122.5	119.9	118.3	115.7	113.9	104.7	101.5	99.1	160.8	160.8
164.0	-	-	119.8	118.1	115.4	113.6	111.0	109.2	99.9	96.8	94.3	164.0	164.0
177.2	-	-	104.3	102.5	99.4	97.1	94.2	92.5	82.8	80.0	77.9	177.2	177.2
190.3	-	-	-	88.8	85.3	82.7	79.8	77.8	68.3	65.3	63.1	190.3	190.3
193.6	-	-	-	86.0	82.5	79.7	76.5	75.0	65.3	61.9	60.1	193.6	193.6
203.4	-	-	-	-	74.1	71.3	68.2	66.4	56.4	53.4	51.3	203.4	203.4
213.3	-	-	-	-	66.8	63.8	60.3	58.2	48.6	45.3	43.0	213.3	213.3
216.5	-	-	-	-	-	61.7	58.0	55.8	46.3	43.0	40.7	216.5	216.5
229.7	-	-	-	-	-	53.1	49.2	46.7	37.0	33.7	31.3	229.7	229.7
242.8	-	-	-	-	-	-	41.9	39.4	29.4	26.1	23.7	242.8	242.8
246.1	-	-	-	-	-	-	40.1	37.6	27.6	24.2	21.8	246.1	246.1
255.9	-	-	-	-	-	-	-	32.6	22.7	19.1	16.7	255.9	255.9
262.5	-	-	-	-	-	-	-	29.5	19.6	15.9	13.5	262.5	262.5
265.7	-	-	-	-	-	-	-	-	18.1	14.4	11.9	265.7	265.7
269.0	-	-	-	-	-	-	-	-	16.5	12.8	-	269.0	269.0
272.3	-	-	-	-	-	-	-	-	15.2	11.5	-	272.3	272.3
278.9	-	-	-	-	-	-	-	-	12.6	-	-	278.9	278.9


 463,000 lb
  551,200 lb

 88,200 lb
  176,400 lb

  31.50 ft  32.2 ft/s 360° 75%															
  137.8 ft 157.5 ft 177.2 ft 196.9 ft 216.5 ft 236.2 ft 255.9 ft 275.6 ft 295.3 ft 315.0 ft 334.6 ft 354.3 ft 374.0 ft 															
ft	1,000 lb														ft
26.2	1115.5	1115.5	-	-	-	-	-	-	-	-	-	-	-	-	26.2
29.5	1115.5	1115.5	1115.5	1086.9	-	-	-	-	-	-	-	-	-	-	29.5
32.8	1115.5	1115.5	1113.3	1058.2	950.2	793.7	-	-	-	-	-	-	-	-	32.8
36.1	1058.2	1035.1	1011.9	965.6	892.9	780.4	634.9	568.8	-	-	-	-	-	-	36.1
39.4	1000.9	954.6	910.5	873.0	835.6	767.2	634.9	568.8	509.3	412.3	-	-	-	-	39.4
42.7	917.1	877.4	840.0	805.8	772.7	725.3	625.0	563.3	504.9	412.3	368.2	315.3	-	-	42.7
45.9	833.3	800.3	769.4	738.5	709.9	683.4	615.1	557.8	500.4	412.3	368.2	315.3	266.8	-	45.9
52.5	712.1	687.8	663.6	639.3	617.3	595.2	573.2	537.9	485.0	399.0	363.8	310.9	266.8	-	52.5
59.1	606.3	601.9	579.8	562.2	542.3	526.9	507.1	491.6	467.4	385.8	354.9	302.0	257.9	-	59.1
65.6	518.1	515.9	513.7	500.4	485.0	469.6	451.9	440.9	425.5	372.6	343.9	295.4	249.1	-	65.6
72.2	457.5	455.3	453.1	446.4	438.7	426.6	411.2	401.2	388.0	357.1	335.1	286.6	241.4	-	72.2
78.7	396.8	394.6	392.4	392.4	392.4	383.6	370.4	361.6	350.5	341.7	326.3	277.8	233.7	-	78.7
85.3	357.1	356.0	352.7	352.7	352.7	347.2	339.5	331.8	321.9	314.2	302.0	272.3	227.1	-	85.3
91.9	317.5	317.5	313.1	313.1	313.1	310.9	308.6	302.0	293.2	286.6	277.8	266.8	220.5	-	91.9
98.4	289.9	289.9	285.5	285.5	284.4	283.3	281.1	276.7	271.2	265.7	256.8	248.0	216.1	-	98.4
111.5	242.5	241.4	238.1	237.5	235.9	235.3	232.6	231.5	229.3	226.0	219.9	213.8	201.7	-	111.5
124.7	208.0	205.6	202.8	201.7	200.1	199.0	195.7	195.7	193.5	191.3	187.9	184.6	179.1	-	124.7
128.0	200.6	198.1	195.1	194.0	192.1	191.0	187.7	187.7	185.5	183.3	180.0	177.7	172.8	-	128.0
137.8	-	179.1	176.0	174.5	172.3	171.2	167.6	167.6	165.3	163.1	159.8	158.7	154.3	-	137.8
144.4	-	167.6	164.6	162.8	160.6	159.5	155.4	155.4	153.2	151.0	147.7	146.6	142.2	-	144.4
150.9	-	-	153.2	151.0	148.8	147.7	143.3	143.3	141.1	138.9	135.6	134.5	130.1	-	150.9
160.8	-	-	140.0	138.3	135.6	134.5	130.1	130.1	127.3	125.1	121.8	120.2	116.0	-	160.8
164.0	-	-	-	134.1	131.2	130.1	125.7	125.7	122.7	120.5	117.2	115.4	111.3	-	164.0
177.2	-	-	-	119.0	116.2	114.6	110.1	109.7	106.6	104.3	100.7	98.5	94.4	-	177.2
190.3	-	-	-	-	103.8	101.4	96.6	95.5	92.6	90.2	86.0	83.8	79.6	-	190.3
193.6	-	-	-	-	101.0	98.7	93.8	92.6	89.7	87.3	83.0	80.7	76.7	-	193.6
203.4	-	-	-	-	-	90.7	85.4	84.1	81.1	78.7	74.1	71.8	68.0	-	203.4
213.3	-	-	-	-	-	83.1	77.7	76.2	73.0	70.3	66.4	64.0	59.7	-	213.3
216.5	-	-	-	-	-	-	75.5	73.9	70.5	68.1	64.1	61.7	57.2	-	216.5
229.7	-	-	-	-	-	-	67.0	65.0	61.7	59.1	54.7	52.2	48.1	-	229.7
242.8	-	-	-	-	-	-	-	57.8	54.4	51.5	47.1	44.8	40.4	-	242.8
246.1	-	-	-	-	-	-	-	56.0	52.5	49.6	45.2	42.9	38.5	-	246.1
255.9	-	-	-	-	-	-	-	-	47.4	44.8	40.3	37.8	33.3	-	255.9
262.5	-	-	-	-	-	-	-	-	44.5	41.8	37.3	34.7	30.0	-	262.5
269.0	-	-	-	-	-	-	-	-	-	38.8	34.2	31.5	27.1	-	269.0
278.9	-	-	-	-	-	-	-	-	-	34.8	30.2	27.4	23.1	-	278.9
282.2	-	-	-	-	-	-	-	-	-	-	28.9	26.2	21.8	-	282.2
295.3	-	-	-	-	-	-	-	-	-	-	24.4	21.7	17.0	-	295.3
298.6	-	-	-	-	-	-	-	-	-	-	23.4	20.6	15.9	-	298.6
308.4	-	-	-	-	-	-	-	-	-	-	-	17.4	12.6	-	308.4
311.7	-	-	-	-	-	-	-	-	-	-	-	16.4	11.7	-	311.7
315.0	-	-	-	-	-	-	-	-	-	-	-	15.4	-	-	315.0

 286,600 lb
  374,800 lb
  463,000 lb
  551,200 lb

 0 lb
  0 lb
  88,200 lb
  176,400 lb

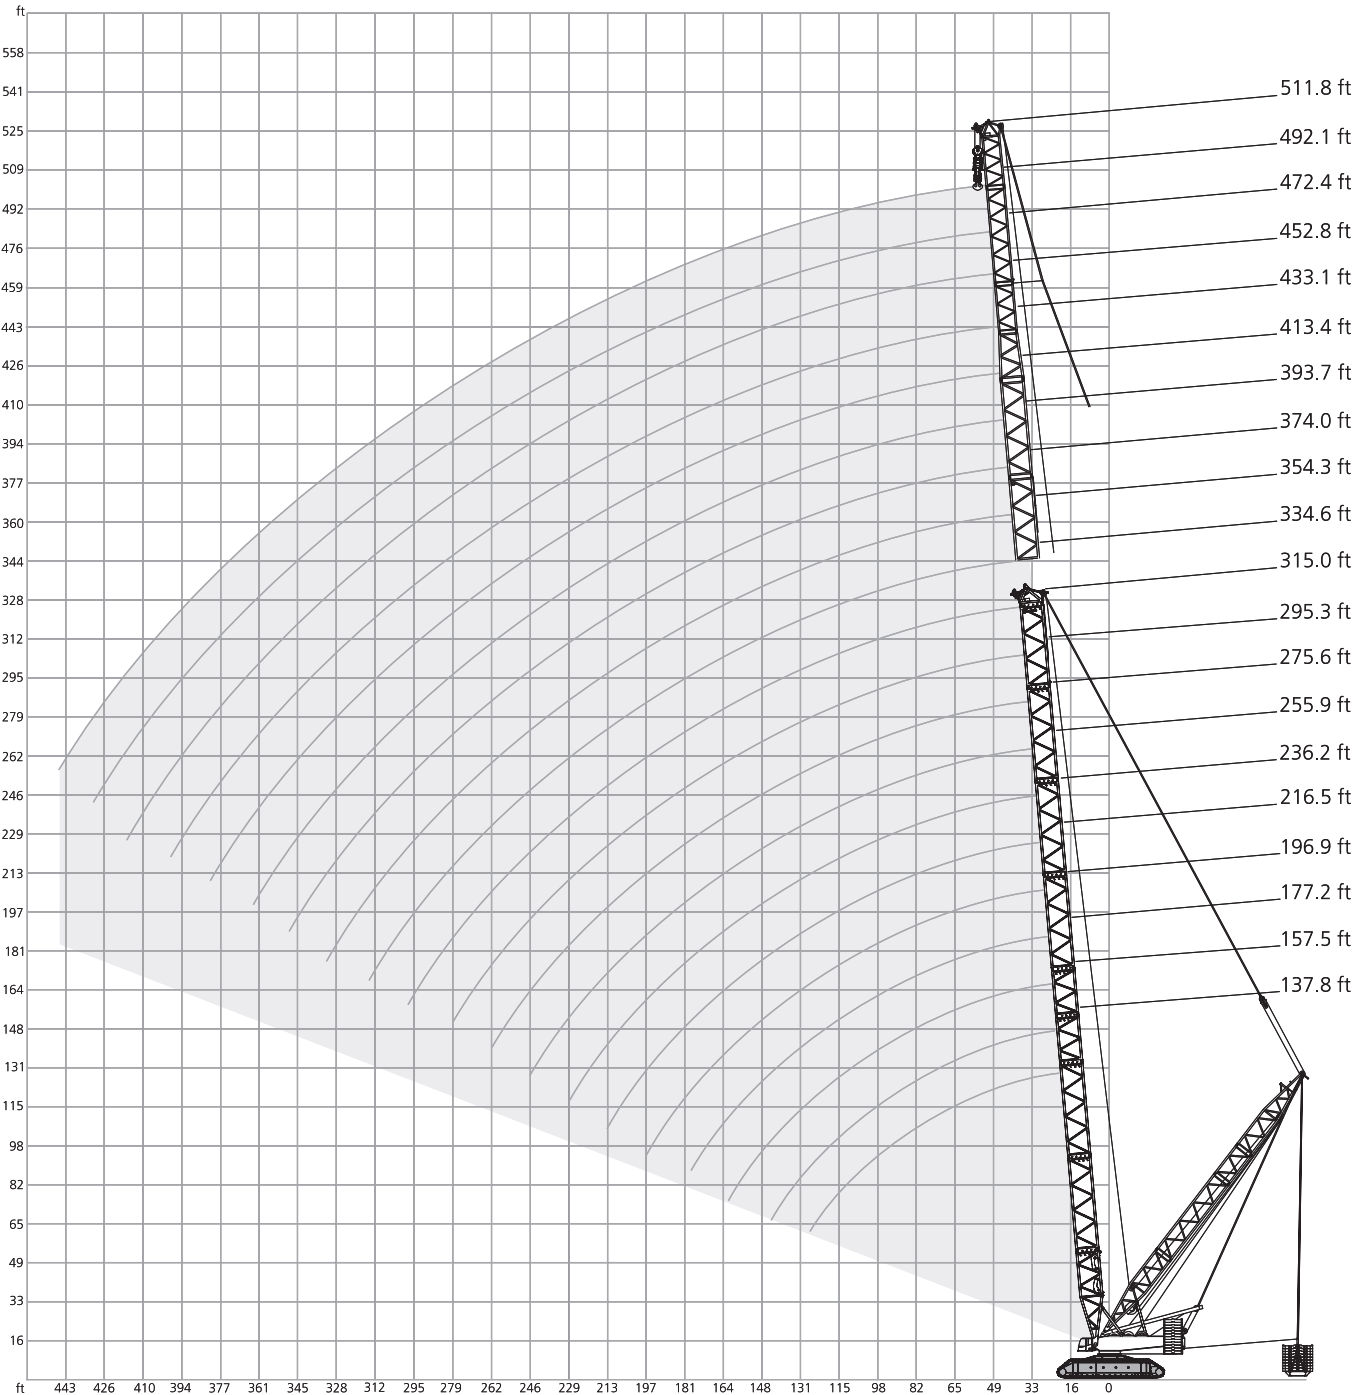

374,800 – 551,200 lb + 0–176,400 lb 49.2–98.4 ft 31.50 ft 32.2 ft/s 360° 75%													
	137.8 ft			157.5 ft			177.2 ft			196.9 ft			
	0 lb	0 – 992,100 lb		0 lb	0 – 992,100 lb		0 lb	0 – 992,100 lb		0 lb	0 – 992,100 lb		
	49.2 – 78.7 ft	78.7–98.4 ft		49.2 – 78.7 ft	78.7–98.4 ft		49.2 – 78.7 ft	78.7–98.4 ft		49.2 – 78.7 ft	78.7–98.4 ft		
ft	1,000 lb												ft
26.2	1677.7	2755.8	2755.8	1668.9	2614.7	2614.7	-	-	-	-	-	-	26.2
29.5	1494.7	2747.0	2755.8	1485.9	2614.7	2614.7	1422.0	2286.2	2286.2	-	-	-	29.5
32.8	1327.2	2740.3	2742.6	1327.2	2614.7	2614.7	1263.2	2286.2	2286.2	1194.9	2114.2	2114.2	32.8
39.4	1036.2	2484.6	2683.0	1031.8	2475.8	2594.8	1029.6	2286.2	2286.2	981.1	2114.2	2114.2	39.4
45.9	842.2	2178.2	2489.0	835.6	2169.4	2482.4	833.3	2162.7	2286.2	826.7	2114.2	2114.2	45.9
52.5	725.3	1907.0	2184.8	696.7	1898.2	2178.2	692.3	1891.6	2169.4	690.0	1885.0	2114.2	52.5
59.1	619.5	1693.2	1867.3	612.9	1684.3	1933.5	588.6	1677.7	1926.8	586.4	1671.1	1920.2	59.1
65.6	537.9	1521.2	1620.4	531.3	1512.4	1737.2	526.9	1505.8	1730.6	504.9	1499.1	1724.0	65.6
72.2	471.8	1377.9	1422.0	465.2	1371.3	1534.4	460.8	1364.7	1569.7	456.4	1358.0	1563.1	72.2
78.7	418.9	1252.2	1256.6	412.3	1252.2	1364.7	405.7	1245.6	1435.2	401.2	1239.0	1426.4	78.7
85.3	374.8	1113.3	1119.9	368.2	1150.8	1221.4	361.6	1144.2	1289.7	357.1	1137.6	1311.8	85.3
91.9	337.3	994.3	1000.9	330.7	1064.8	1097.9	324.1	1058.2	1166.2	317.5	1051.6	1210.3	91.9
98.4	306.4	917.1	897.3	297.6	985.5	992.1	291.0	983.3	1058.2	286.6	974.4	1104.5	98.4
111.5	253.5	749.6	723.1	246.9	811.3	815.7	240.3	857.6	881.8	233.7	851.0	928.1	111.5
124.7	216.1	628.3	575.4	207.2	694.5	672.4	200.6	736.3	740.8	194.0	751.8	787.1	124.7
128.0	207.2	593.0	540.1	199.0	663.6	641.5	192.4	705.5	709.9	185.2	730.8	757.3	128.0
137.8	-	-	-	176.9	575.4	552.3	169.8	620.6	625.0	162.0	663.6	674.6	137.8
144.4	-	-	-	163.1	522.5	493.8	155.4	577.6	571.0	147.7	617.3	621.7	144.4
150.9	-	-	-	-	-	-	143.9	536.8	522.5	136.1	572.1	576.5	150.9
160.8	-	-	-	-	-	-	127.9	471.8	449.7	119.8	506.5	510.9	160.8
164.0	-	-	-	-	-	-	-	-	-	115.1	491.6	490.5	164.0
177.2	-	-	-	-	-	-	-	-	-	97.2	429.9	410.1	177.2

216.5 ft 0 lb 0 – 992,100 lb 236.2 ft 0 lb 0 – 992,100 lb 255.9 ft 0 lb 0 – 992,100 lb													
78.7–98.4 ft 49.2 – 78.7 ft 78.7–98.4 ft 49.2 – 78.7 ft 78.7–98.4 ft 49.2 – 78.7 ft													
1,000 lb													
ft													
32.8	1133.2	1854.1	1854.1	-	-	-	-	-	-	-	-	-	32.8
36.1	1025.2	1854.1	1854.1	976.6	1675.5	1675.5	930.4	1492.5	1496.9	930.4	1492.5	1496.9	36.1
39.4	934.8	1854.1	1854.1	890.7	1675.5	1675.5	853.2	1492.5	1496.9	853.2	1492.5	1496.9	39.4
45.9	791.5	1854.1	1854.1	756.2	1675.5	1675.5	725.3	1492.5	1496.9	725.3	1492.5	1496.9	45.9
52.5	683.4	1854.1	1854.1	654.8	1675.5	1675.5	628.3	1492.5	1496.9	628.3	1492.5	1496.9	52.5
59.1	584.2	1666.7	1854.1	573.2	1651.3	1675.5	551.2	1492.5	1496.9	551.2	1492.5	1496.9	59.1
65.6	502.7	1494.7	1719.6	500.4	1488.1	1675.5	489.4	1468.3	1496.9	489.4	1468.3	1496.9	65.6
72.2	454.2	1351.4	1558.7	434.3	1347.0	1552.1	432.1	1340.4	1496.9	432.1	1340.4	1496.9	72.2
78.7	399.0	1234.6	1422.0	396.8	1228.0	1415.4	379.2	1221.4	1411.0	379.2	1221.4	1411.0	78.7
85.3	352.7	1133.2	1307.3	350.5	1126.6	1300.7	346.1	1122.2	1296.3	346.1	1122.2	1296.3	85.3
91.9	315.3	1045.0	1208.1	310.9	1040.6	1201.5	308.6	1034.0	1197.1	308.6	1034.0	1197.1	91.9
98.4	282.2	970.0	1122.2	277.8	963.4	1115.5	273.4	959.0	1111.1	273.4	959.0	1111.1	98.4
111.5	229.3	846.6	959.0	224.9	840.0	974.4	220.5	833.3	967.8	220.5	833.3	967.8	111.5
124.7	189.6	747.4	820.1	184.1	740.8	840.0	179.7	734.1	848.8	179.7	734.1	848.8	124.7
137.8	157.6	669.1	711.0	152.7	662.5	731.9	147.2	655.9	743.0	147.2	655.9	743.0	137.8
150.9	131.2	599.7	615.1	125.7	595.2	638.2	120.4	589.7	652.6	120.4	589.7	652.6	150.9
164.0	109.6	528.0	532.4	103.6	537.9	558.9	98.3	533.5	575.4	98.3	533.5	575.4	164.0
177.2	91.8	454.2	458.6	85.2	481.7	489.4	79.6	483.9	508.2	79.6	483.9	508.2	177.2
190.3	76.6	397.9	390.2	69.4	422.2	425.5	63.6	438.7	447.5	63.6	438.7	447.5	190.3
196.9	69.7	374.8	357.1	62.2	392.4	394.6	56.2	416.7	418.9	56.2	416.7	418.9	196.9
203.4	-	-	-	56.1	366.0	367.1	49.9	390.2	393.5	49.9	390.2	393.5	203.4
213.3	-	-	-	47.2	341.7	324.1	41.0	352.7	356.0	41.0	352.7	356.0	213.3
216.5	-	-	-	-	-	-	38.3	340.2	343.9	38.3	340.2	343.9	216.5
229.7	-	-	-	-	-	-	28.0	306.4	295.4	28.0	306.4	295.4	229.7

Lifting capacities > 2205,000 lb only with special equipment

	0 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------

374,800 – 551,200 lb +  0–176,400 lb  49.2–98.4 ft  31.50 ft  32.2 ft/s 360° 75%											
 275.6 ft  295.3 ft  315.0 ft 0 lb 0 – 992,100 lb 0 lb 0 – 992,100 lb 0 lb 0 – 992,100 lb  49.2 – 78.7 ft  78.7–98.4 ft  49.2 – 78.7 ft  78.7–98.4 ft  49.2 – 78.7 ft  78.7–98.4 ft											
ft	1,000 lb										ft
39.4	813.5	1377.9	1331.6	778.2	1232.4	1190.5	-	-	-	-	39.4
42.7	749.6	1377.9	1331.6	718.7	1232.4	1190.5	687.8	1097.9	1067.0	1067.0	42.7
45.9	694.5	1377.9	1331.6	665.8	1232.4	1190.5	637.1	1097.9	1067.0	1067.0	45.9
52.5	601.9	1377.9	1331.6	579.8	1232.4	1190.5	555.6	1097.9	1067.0	1067.0	52.5
59.1	529.1	1358.0	1331.6	509.3	1232.4	1190.5	487.2	1097.9	1067.0	1067.0	59.1
65.6	469.6	1331.6	1331.6	451.9	1212.5	1190.5	432.1	1097.9	1067.0	1067.0	65.6
72.2	418.9	1311.8	1331.6	403.4	1188.3	1190.5	385.8	1080.3	1067.0	1067.0	72.2
78.7	374.8	1214.7	1331.6	361.6	1179.5	1190.5	346.1	1062.6	1067.0	1067.0	78.7
85.3	328.5	1113.3	1289.7	326.3	1108.9	1183.9	313.1	1053.8	1067.0	1067.0	85.3
91.9	302.0	1027.4	1190.5	286.6	1022.9	1164.0	280.0	1014.1	1062.6	1062.6	91.9
98.4	269.0	952.4	1104.5	264.6	945.8	1097.9	255.7	939.2	1053.8	1053.8	98.4
111.5	215.0	826.7	961.2	211.6	822.3	956.8	203.9	813.5	948.0	948.0	111.5
124.7	173.1	727.5	846.6	169.8	723.1	844.4	160.9	714.3	831.1	831.1	124.7
137.8	140.5	649.3	746.3	136.1	644.9	745.2	128.4	636.0	734.1	734.1	137.8
150.9	113.8	582.0	658.1	109.1	577.6	660.3	101.2	568.8	652.6	652.6	150.9
164.0	91.6	525.8	583.1	86.6	521.4	587.5	78.5	512.6	582.0	582.0	164.0
177.2	72.6	478.4	518.1	67.5	474.0	523.6	59.3	465.2	521.4	521.4	177.2
190.3	56.4	436.5	460.8	51.1	432.1	468.5	43.0	423.3	468.5	468.5	190.3
203.4	42.5	399.0	409.0	37.1	395.7	420.0	29.0	386.9	421.1	421.1	203.4
216.5	30.6	359.4	361.6	25.0	363.8	374.8	16.5	354.9	378.1	378.1	216.5
226.4	22.7	326.3	328.5	16.8	339.5	342.8	-	335.1	347.8	347.8	226.4
229.7	20.3	315.3	317.5	-	330.0	332.9	-	328.5	338.4	338.4	229.7
236.2	15.4	293.2	295.4	-	310.9	313.1	-	315.3	319.7	319.7	236.2
242.8	-	278.5	274.8	-	292.1	294.3	-	298.7	302.0	302.0	242.8
246.1	-	273.4	264.6	-	282.7	284.9	-	290.5	293.2	293.2	246.1
255.9	-	-	-	-	254.6	256.8	-	265.7	267.9	267.9	255.9
262.5	-	-	-	-	244.7	238.1	-	249.1	251.3	251.3	262.5
269.0	-	-	-	-	-	-	-	233.7	235.9	235.9	269.0
278.9	-	-	-	-	-	-	-	216.1	212.7	212.7	278.9



0 lb

352,800 lb

529,200 lb

705,600 lb

882,000 lb

992,100 lb

374,800 – 551,200 lb + 0–176,400 lb 49.2–98.4 ft 31.50 ft 32.2 ft/s 360° 75%															
216.5 ft SSL/LSL S1 0 lb 0 – 992,100lb				236.2 ft SSL/LSL S1 0 lb 0 – 992,100lb				255.9 ft SSL/LSL S1 0 lb 0 – 992,100lb				275.6 ft SSL/LSL S1 0 lb 0 – 992,100lb			
49.2 – 78.7 ft 78.7–98.4 ft				49.2 – 78.7 ft 78.7–98.4 ft				49.2 – 78.7 ft 78.7–98.4 ft				49.2 – 78.7 ft 78.7–98.4 ft			
ft				1,000 lb										ft	
32.8	1115.5	1115.5	1115.5	1089.1	1115.5	1115.5	-	-	-	-	-	-	32.8		
36.1	1040.6	1115.5	1115.5	989.9	1115.5	1115.5	945.8	1115.5	1115.5	901.7	1115.5	1115.5	36.1		
39.4	956.8	1115.5	1115.5	912.7	1115.5	1115.5	873.0	1115.5	1115.5	834.5	1115.5	1115.5	39.4		
45.9	812.4	1115.5	1115.5	777.1	1115.5	1115.5	746.3	1115.5	1115.5	715.4	1115.5	1115.5	45.9		
52.5	703.3	1115.5	1115.5	674.6	1115.5	1115.5	649.3	1115.5	1115.5	622.8	1115.5	1115.5	52.5		
59.1	610.7	1115.5	1115.5	594.1	1115.5	1115.5	572.1	1115.5	1115.5	549.0	1115.5	1115.5	59.1		
65.6	530.2	1115.5	1115.5	521.4	1115.5	1115.5	509.3	1115.5	1115.5	488.3	1115.5	1115.5	65.6		
72.2	470.3	1115.5	1115.5	461.5	1115.5	1115.5	453.4	1115.5	1115.5	438.7	1115.5	1115.5	72.2		
78.7	423.3	1115.5	1115.5	414.5	1115.5	1115.5	399.0	1115.5	1115.5	394.6	1115.5	1115.5	78.7		
85.3	381.4	1092.4	1115.5	372.6	1086.9	1115.5	363.8	1085.8	1111.1	359.4	1081.4	1115.5	85.3		
91.9	339.5	1069.2	1115.5	330.7	1058.2	1115.5	328.5	1056.0	1106.7	324.1	1047.2	1095.7	91.9		
98.4	309.7	997.6	1089.1	300.9	987.7	1115.5	297.6	984.4	1100.1	293.2	976.6	1067.0	98.4		
111.5	256.8	870.8	983.3	248.0	862.0	992.1	243.6	857.6	989.9	238.7	851.0	983.3	111.5		
124.7	215.5	771.6	844.4	206.7	762.8	857.6	202.8	758.4	870.8	196.8	751.8	868.6	124.7		
137.8	183.4	690.8	731.9	174.5	682.7	749.6	170.9	679.0	762.8	164.2	672.4	767.2	137.8		
150.9	155.4	617.3	637.1	146.6	610.7	657.0	142.2	608.5	674.6	135.6	601.9	679.0	150.9		
164.0	134.8	548.2	555.6	126.0	554.8	577.6	121.6	552.6	597.5	114.9	547.5	604.1	164.0		
177.2	116.8	479.1	480.6	107.7	498.2	507.1	103.2	502.7	529.1	96.2	498.2	540.1	177.2		
190.3	101.2	423.3	414.5	91.7	440.9	445.3	86.9	458.6	469.6	79.6	454.2	482.8	190.3		
193.6	97.9	414.5	396.8	88.6	427.0	431.0	83.6	446.8	456.4	76.3	445.0	470.1	193.6		
203.4	-	-	-	79.2	385.1	388.0	73.9	411.5	416.7	66.4	417.4	432.1	203.4		
213.3	-	-	-	70.3	359.4	346.1	64.9	375.9	378.6	57.1	388.7	395.7	213.3		
216.5	-	-	-	-	-	-	62.3	363.8	366.0	54.5	378.5	383.6	216.5		
229.7	-	-	-	-	-	-	52.0	324.1	317.5	43.9	337.3	339.5	229.7		
242.8	-	-	-	-	-	-	-	-	-	35.1	296.7	298.9	242.8		
246.1	-	-	-	-	-	-	-	-	-	32.8	291.0	288.8	246.1		
0 lb 176,400 lb 352,800 lb 529,200 lb 705,600 lb 882,000 lb 992,100 lb															

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

SSL/LSL, SSL/LSL S1

CC 6800-1

374,800 – 551,200 lb + 0–176,400 lb 49.2-98.4 ft 31.50 ft 32.2 ft/s 360° 75%													
295.3 ft		315.0 ft				334.6 ft							
SSL/LSL S1		SSL/LSL S1				SSL/LSL		SSL/LSL S1					
0 lb 0 – 992,100lb		0 lb 0 – 992,100lb				0 lb 0 – 992,100lb							
49.2 – 78.7 ft 78.7–98.4 ft		49.2 – 78.7 ft 78.7–98.4 ft				49.2 – 78.7 ft 78.7–98.4 ft		49.2–78.7 ft 78.7–98.4 ft					
1,000 lb													
39.4	793.7	1115.5	1115.5	758.4	1080.3	1058.2	-	-	-	-	-	39.4	
42.7	734.1	1115.5	1115.5	703.3	1080.3	1058.2	679.0	992.1	959.0	965.6	948.0	42.7	
45.9	685.6	1115.5	1115.5	657.0	1080.3	1058.2	634.9	992.1	959.0	965.6	948.0	45.9	
52.5	598.6	1115.5	1115.5	574.3	1080.3	1058.2	555.6	992.1	959.0	965.6	948.0	52.5	
59.1	528.0	1115.5	1115.5	508.2	1079.2	1058.2	491.6	992.1	959.0	965.6	948.0	59.1	
65.6	470.7	1115.5	1115.5	453.1	1072.5	1058.2	438.7	992.1	959.0	965.6	948.0	65.6	
72.2	424.0	1115.5	1115.5	407.1	1056.0	1058.2	394.6	975.2	959.0	954.6	948.0	72.2	
78.7	381.4	1115.5	1113.3	366.0	1056.0	1058.2	354.9	972.2	959.0	954.6	948.0	78.7	
85.3	345.0	1079.2	1106.7	332.9	1036.2	1056.0	324.1	954.6	959.0	945.8	948.0	85.3	
91.9	308.6	1042.8	1102.3	299.8	1027.4	1053.8	293.2	952.4	959.0	945.8	948.0	91.9	
98.4	283.3	972.2	1064.8	274.5	960.1	1049.4	269.0	920.4	959.0	912.7	948.0	98.4	
111.5	234.8	846.6	976.6	226.0	837.8	961.2	221.0	833.3	943.6	836.7	910.5	111.5	
124.7	192.9	746.3	864.2	184.1	738.5	853.2	179.1	733.0	840.0	738.5	844.4	124.7	
137.8	159.8	666.5	765.0	151.0	659.2	756.2	146.6	653.3	745.2	659.2	751.8	137.8	
150.9	131.2	597.5	681.2	122.4	588.6	674.6	117.9	584.2	665.8	588.6	672.4	150.9	
164.0	110.0	543.1	608.5	101.3	535.7	604.1	96.3	529.8	597.5	535.7	606.3	164.0	
177.2	91.1	493.8	546.7	82.5	487.2	542.3	77.1	481.3	540.1	488.0	546.7	177.2	
190.3	74.3	449.7	491.6	65.7	443.1	489.4	60.2	438.7	489.4	445.3	496.0	190.3	
203.4	60.9	414.5	440.9	52.3	407.9	443.1	46.8	403.4	443.1	408.6	449.7	203.4	
216.5	48.8	382.1	396.8	40.2	375.5	399.0	34.7	371.1	401.2	375.5	410.1	216.5	
229.7	37.9	352.7	354.9	29.3	346.1	361.6	23.8	341.7	366.0	346.1	372.6	229.7	
242.8	29.1	314.5	316.7	20.4	319.7	326.3	14.6	317.0	330.7	322.6	338.8	242.8	
246.1	26.9	305.0	307.2	18.1	313.1	317.5	12.3	310.9	321.9	316.7	330.3	246.1	
255.9	20.8	277.8	280.0	11.9	288.8	291.0	-	291.7	299.8	299.1	306.4	255.9	
262.5	17.0	262.4	262.4	-	272.3	274.5	-	279.3	284.4	286.6	291.0	262.5	
269.0	-	-	-	-	255.7	257.9	-	266.8	269.0	273.4	275.6	269.0	
278.9	-	-	-	-	233.7	235.9	-	245.8	248.0	252.4	254.6	278.9	
282.2	-	-	-	-	-	-	-	238.8	241.0	245.4	247.7	282.2	
295.3	-	-	-	-	-	-	-	210.9	213.1	217.5	219.7	295.3	
298.6	-	-	-	-	-	-	-	207.2	206.1	212.7	212.7	298.6	
0 lb 176,400 lb 352,800 lb 529,200 lb 705,600 lb 882,000 lb 992,100 lb													

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
---	------	------------	------------	------------	------------	------------	------------

SSL/LSL, SSL/LSL S1

CC 6800-1

374,800 – 551,200 lb +  0–176,400 lb  49.2–98.4 ft  31.50 ft  32.2 ft/s 360° 75%															
	 354.3 ft					374.0 ft					393.7 ft				
	SSL/LSL			SSL/LSL S1		SSL/LSL			SSL/LSL S1		SSL/LSL			SSL/LSL S1	
	 0 lb	0 – 992,100lb				 0 lb	0 – 992,100lb				 0 lb	0 – 992,100 lb			
	 49.2 – 78.7 ft	78.7– 98.4 ft	49.2– 78.7 ft	78.7– 98.4 ft	49.2 – 78.7 ft	78.7– 98.4 ft	49.2– 78.7 ft	78.7– 98.4 ft	49.2 – 78.7 ft	78.7– 98.4 ft	49.2 – 78.7 ft	78.7– 98.4 ft	49.2– 78.7 ft	78.7– 98.4 ft	
1,000 lb															
ft															
42.7	648.2	892.9	862.0	873.0	859.8	-	-	-	-	-	-	-	-	-	-
45.9	606.3	892.9	862.0	873.0	859.8	584.2	802.5	773.8	789.3	778.2	564.4	727.5	703.3	716.5	703.3
52.5	531.3	892.9	862.0	873.0	859.8	514.8	802.5	773.8	789.3	778.2	496.0	727.5	703.3	716.5	703.3
59.1	469.6	892.9	862.0	873.0	859.8	456.4	802.5	773.8	789.3	778.2	439.8	727.5	703.3	716.5	703.3
65.6	417.8	892.9	862.0	871.9	859.8	406.8	802.5	773.8	789.3	778.2	392.4	727.5	703.3	716.5	703.3
72.2	375.5	892.9	862.0	869.4	859.8	365.2	802.5	773.8	787.1	778.2	352.7	727.5	703.3	713.6	703.3
78.7	337.3	892.9	862.0	866.4	859.8	328.5	802.5	773.8	782.6	778.2	317.5	727.5	703.3	707.7	703.3
85.3	307.5	868.6	862.0	858.7	859.8	299.8	791.5	773.8	779.3	778.2	289.9	725.3	703.3	700.0	703.3
91.9	277.8	868.6	862.0	855.4	859.8	271.2	791.5	773.8	778.2	778.2	262.4	723.1	703.3	696.7	703.3
98.4	251.3	857.6	862.0	834.5	857.6	246.9	782.6	773.8	771.6	776.0	240.3	716.5	703.3	695.6	703.3
111.5	206.1	812.4	862.0	799.2	846.6	203.9	766.1	773.8	743.0	765.0	195.1	700.0	703.3	682.3	690.0
124.7	168.7	723.1	811.3	730.8	793.7	166.4	718.7	760.6	704.4	736.3	157.6	685.6	703.3	649.3	665.8
137.8	135.8	644.5	727.5	651.1	736.3	133.5	641.5	712.1	646.7	698.9	129.2	637.1	670.2	611.4	632.7
150.9	107.6	575.4	650.4	582.0	659.2	105.2	571.0	641.5	577.6	652.6	101.0	566.6	630.5	568.8	597.5
164.0	86.0	521.0	586.4	527.6	595.2	83.6	518.1	577.6	523.2	588.6	79.2	513.7	568.8	514.4	560.0
177.2	66.7	472.5	529.1	479.1	537.9	64.3	470.3	524.7	474.7	533.5	59.9	465.9	515.9	465.9	520.3
190.3	49.8	429.9	478.4	436.5	489.4	47.4	427.7	476.2	432.1	485.0	43.0	423.3	469.6	423.3	474.0
203.4	36.3	394.6	434.3	402.7	445.3	33.9	392.4	434.3	396.8	440.9	29.5	388.0	427.7	389.5	432.1
216.5	24.1	362.3	396.8	370.4	405.7	21.5	359.8	394.6	365.2	403.4	17.0	354.9	390.2	357.6	394.6
223.1	18.7	347.6	378.1	354.9	388.0	15.8	344.8	377.0	351.3	385.8	11.2	339.5	373.3	342.6	377.0
226.4	15.9	340.2	368.7	347.2	379.2	13.0	337.3	368.2	344.3	377.0	-	332.9	365.2	335.1	369.3
229.7	13.2	332.9	359.4	339.5	370.4	-	330.7	361.6	337.3	368.2	-	326.3	357.1	328.5	361.6
242.8	-	309.4	328.5	315.3	337.3	-	307.2	330.7	312.0	337.3	-	302.8	327.8	305.0	332.2
255.9	-	286.6	298.4	293.9	307.2	-	285.1	301.3	289.5	307.9	-	280.7	299.8	282.2	304.2
269.0	-	264.6	269.0	273.4	277.8	-	264.6	273.4	269.0	280.0	-	260.1	273.4	260.1	277.8
282.2	-	239.6	242.5	248.4	251.3	-	245.4	248.4	251.3	255.0	-	241.0	249.9	242.5	254.3
295.3	-	215.0	217.2	223.8	226.0	-	224.1	224.9	230.8	231.5	-	222.7	227.4	224.9	231.5
308.4	-	190.7	192.9	199.5	201.7	-	200.6	202.8	207.2	209.4	-	205.0	206.1	207.2	209.4
315.0	-	183.0	179.7	189.6	189.6	-	189.6	191.4	195.8	198.0	-	194.4	196.2	197.3	199.2
321.5	-	-	-	-	-	-	178.6	180.0	184.5	186.7	-	184.3	186.3	186.8	188.9
331.4	-	-	-	-	-	-	165.3	164.2	170.9	169.8	-	169.2	171.4	171.4	172.5
334.6	-	-	-	-	-	-	-	-	-	-	-	164.2	166.4	166.4	166.4
347.8	-	-	-	-	-	-	-	-	-	-	-	148.8	146.6	149.9	143.3

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
---	------	------------	------------	------------	------------	------------	------------

SSL/LSL, SSL/LSL S1

CC 6800-1

374,800 – 551,200 lb + 0–176,400 lb 49.2–98.4 ft 31.50 ft 32.2 ft/s 360° 75%															
413.4 ft					433.1 ft					452.8 ft					
SSL/LSL			SSL/LSL S1		SSL/LSL			SSL/LSL S1		SSL/LSL			SSL/LSL S1		
0 lb		0 – 992,100lb			0 lb		0 – 992,100lb			0 lb		0 – 992,100lb			
49.2 – 78.7 ft		78.7– 98.4 ft	49.2– 78.7 ft	78.7– 98.4 ft	49.2 – 78.7 ft		78.7– 98.4 ft	49.2– 78.7 ft	78.7– 98.4 ft	49.2 – 78.7 ft		78.7– 98.4 ft	49.2– 78.7 ft	78.7– 98.4 ft	
1,000 lb															
49.2	509.3	652.6	632.7	634.9	630.5	496.0	586.4	571.0	577.6	573.2	-	-	-	-	-
52.5	480.6	652.6	632.7	634.9	630.5	467.4	586.4	571.0	577.6	573.2	451.9	526.9	509.3	529.1	522.5
59.1	426.6	652.6	632.7	634.9	630.5	415.6	586.4	571.0	577.6	573.2	402.3	526.9	507.1	526.9	522.5
65.6	381.4	652.6	632.7	634.9	630.5	371.5	586.4	571.0	577.6	573.2	359.4	525.8	504.9	526.9	522.5
72.2	343.9	652.6	632.7	634.9	630.5	333.6	586.4	571.0	577.6	573.2	323.3	524.7	504.9	526.2	522.5
78.7	308.6	652.6	632.7	634.9	630.5	299.8	586.4	571.0	577.6	573.2	291.0	524.7	502.7	524.7	522.5
85.3	281.1	652.6	632.7	634.9	630.5	273.4	586.4	571.0	577.6	573.2	265.7	523.6	498.2	524.7	522.5
91.9	253.5	652.6	632.7	634.9	628.3	246.9	586.4	571.0	577.6	571.0	240.3	522.5	496.0	524.7	520.3
98.4	232.6	647.1	632.7	634.9	628.3	226.5	585.3	568.8	577.6	571.0	219.9	519.2	491.6	524.7	520.3
111.5	190.1	634.9	632.7	631.6	628.3	186.8	578.7	562.2	577.6	571.0	181.9	511.5	482.8	524.7	518.1
124.7	154.9	621.7	626.1	610.7	626.1	153.2	561.1	555.6	563.3	571.0	146.1	493.8	474.0	520.3	515.9
137.8	126.8	592.3	610.7	589.4	610.7	124.8	541.6	546.7	548.2	562.2	116.3	474.0	460.8	505.6	513.7
150.9	98.1	564.4	588.6	568.8	593.0	96.6	518.1	537.9	537.9	549.0	93.3	454.2	449.7	493.8	504.9
164.0	76.4	510.0	560.0	515.9	573.2	74.8	493.1	526.9	499.7	537.9	71.5	438.0	438.7	480.6	498.2
177.2	57.0	461.5	507.1	468.1	520.3	55.4	459.3	500.4	459.3	507.1	52.1	426.2	425.5	452.7	489.4
190.3	40.1	418.9	463.0	425.5	474.0	38.4	416.7	456.4	416.7	460.8	35.1	414.5	412.3	410.1	449.7
203.4	26.5	383.6	423.3	390.2	432.1	24.8	382.9	416.7	382.9	421.1	21.5	379.2	399.0	376.3	410.1
213.3	16.6	359.4	395.2	365.5	405.7	15.1	358.3	391.9	358.3	394.6	11.7	352.7	383.6	352.0	384.7
216.5	13.7	352.7	385.8	358.5	396.8	12.1	350.5	383.6	350.5	385.8	-	345.7	377.0	344.7	377.0
229.7	-	324.1	354.9	328.5	363.8	-	321.9	350.5	321.9	354.9	-	317.5	346.1	315.3	346.1
242.8	-	299.1	325.5	305.0	334.4	-	298.4	324.1	296.9	327.0	-	293.9	319.7	290.3	318.2
255.9	-	276.3	298.4	282.9	307.2	-	275.6	298.4	274.1	300.6	-	271.9	293.9	267.5	292.5
269.0	-	255.7	273.4	262.4	282.2	-	253.5	273.4	253.5	275.6	-	251.3	269.0	246.9	269.0
282.2	-	238.1	251.3	243.2	258.7	-	235.9	251.3	235.9	253.5	-	233.7	248.4	229.3	246.9
295.3	-	221.8	230.0	226.3	237.0	-	219.4	230.8	219.4	232.6	-	216.1	228.9	212.7	227.1
308.4	-	206.1	209.4	211.6	217.2	-	205.0	211.6	203.9	212.7	-	200.6	210.5	197.3	208.3
321.5	-	188.5	190.1	195.7	197.8	-	190.3	193.3	190.0	194.4	-	187.4	193.6	183.4	190.7
334.6	-	170.5	171.6	177.1	178.6	-	174.5	175.6	174.5	176.4	-	173.8	177.1	169.4	173.4
347.8	-	152.1	153.2	158.7	159.8	-	157.6	158.7	157.6	158.7	-	159.8	160.9	155.4	156.5
360.9	-	135.8	135.6	140.2	142.2	-	141.5	142.6	140.7	142.6	-	144.4	145.5	140.0	141.1
364.2	-	133.4	131.2	137.8	137.8	-	137.4	138.5	136.5	138.5	-	140.5	141.6	136.1	137.2
374.0	-	-	-	-	-	-	125.4	126.5	124.3	126.1	-	129.2	130.4	124.6	126.3
383.9	-	-	-	-	-	-	117.9	114.6	116.8	113.5	-	117.9	119.4	113.8	115.1
387.1	-	-	-	-	-	-	-	-	-	-	-	114.6	115.7	110.2	111.3
400.3	-	-	-	-	-	-	-	-	-	-	-	104.9	102.1	100.1	97.0


	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

SSL/LSL, SSL/LSL S1

CC 6800-1

374,800 – 551,200 lb + 0-176,400 lb 49.2-98.4 ft 31.50 ft 32.2 ft/s 360° 75%															
472.4 ft						492.1 ft						511.8 ft			
SSL/LSL			SSL/LSL S1			SSL/LSL			SSL/LSL S1			SSL/LSL S1			
0 lb		0 – 992,100lb				0 lb		0 – 992,100lb				0 lb		0 – 992,100lb	
49.2 – 78.7 ft		78.7– 98.4 ft		49.2– 78.7 ft		78.7– 98.4 ft		49.2– 78.7 ft		78.7– 98.4 ft		49.2 – 78.7 ft		78.7– 98.4 ft	
ft	1,000 lb													ft	
55.8	412.3	460.8	447.5	482.8	474.0	377.0	405.7	394.6	438.7	429.9	-	-	-	55.8	
59.1	390.2	459.7	445.3	482.8	474.0	359.4	404.5	392.4	438.7	429.9	341.7	396.8	390.2	59.1	
65.6	349.4	457.5	443.1	482.8	474.0	339.5	401.2	390.2	438.7	429.9	306.4	396.8	390.2	65.6	
72.2	315.3	454.2	438.7	482.8	474.0	306.4	396.8	385.8	438.7	429.9	273.4	396.8	390.2	72.2	
78.7	284.4	449.7	436.5	482.8	474.0	275.6	392.4	381.4	438.7	429.9	242.5	396.8	390.2	78.7	
85.3	259.0	446.4	429.9	482.8	474.0	251.3	388.0	377.0	438.7	429.9	219.4	396.8	388.0	85.3	
91.9	233.7	443.1	425.5	482.8	471.8	227.1	383.6	370.4	438.7	427.7	196.2	396.8	388.0	91.9	
98.4	214.4	438.7	421.1	481.7	471.8	207.8	379.2	363.8	437.6	427.7	177.5	394.6	388.0	98.4	
111.5	178.6	428.8	407.9	479.5	471.8	172.5	368.2	352.7	434.3	427.7	143.3	392.4	385.8	111.5	
124.7	143.9	416.7	396.8	477.3	469.6	139.4	354.9	339.5	433.2	425.5	114.9	391.3	383.6	124.7	
137.8	114.3	404.2	381.4	465.9	465.2	111.0	341.7	326.3	426.2	423.3	89.8	386.5	381.4	137.8	
150.9	91.7	392.4	368.2	454.2	463.0	88.2	328.5	313.1	416.7	418.9	65.7	379.2	379.2	150.9	
164.0	69.8	367.4	354.9	446.8	456.4	66.3	316.7	299.8	409.3	414.5	48.1	371.8	377.0	164.0	
177.2	50.3	350.5	339.5	430.6	447.5	46.8	301.3	286.6	402.7	407.9	30.5	363.8	370.4	177.2	
190.3	33.3	337.3	328.5	405.7	438.7	29.8	286.6	273.4	396.8	403.4	13.0	359.4	366.0	190.3	
203.4	19.8	326.7	315.3	370.4	403.4	15.8	277.0	262.4	362.7	390.2	-	346.1	359.4	203.4	
206.7	16.4	324.1	313.1	361.6	395.2	12.3	274.1	260.1	354.4	382.5	-	342.8	356.0	206.7	
210.0	13.0	319.7	310.9	352.7	386.9	-	271.2	257.2	346.1	374.8	-	339.5	352.7	210.0	
216.5	-	312.3	304.2	338.8	370.4	-	261.6	251.3	332.2	359.4	-	324.8	346.1	216.5	
229.7	-	302.0	295.4	310.9	339.5	-	251.3	242.5	304.2	328.5	-	295.4	317.5	229.7	
242.8	-	287.3	285.1	285.9	313.1	-	241.0	233.7	279.3	302.0	-	271.9	292.5	242.8	
255.9	-	269.7	274.1	263.1	288.1	-	230.8	226.3	256.5	277.8	-	249.1	268.2	255.9	
269.0	-	249.1	262.4	242.5	264.6	-	220.5	220.5	235.9	255.7	-	229.3	244.7	269.0	
282.2	-	231.5	244.7	222.7	242.5	-	213.4	214.6	218.3	235.2	-	210.9	225.6	282.2	
295.3	-	214.3	227.6	208.0	222.7	-	205.4	208.6	201.4	216.1	-	193.6	207.2	295.3	
308.4	-	198.4	210.5	191.8	205.0	-	195.1	202.8	185.2	198.4	-	177.5	189.6	308.4	
321.5	-	185.2	193.6	177.8	187.4	-	181.1	189.6	171.2	181.5	-	164.2	173.4	321.5	
334.6	-	172.7	177.5	165.0	170.9	-	168.3	175.6	158.4	165.3	-	151.0	158.0	334.6	
347.8	-	160.9	162.0	153.2	155.4	-	156.5	160.9	146.6	149.9	-	138.9	143.3	347.8	
360.9	-	146.2	147.3	138.9	140.7	-	144.8	147.0	134.1	136.0	-	127.9	130.1	360.9	
374.0	-	132.3	133.4	124.9	126.2	-	132.3	133.4	121.4	122.5	-	116.2	117.2	374.0	
387.1	-	119.0	120.2	110.2	111.3	-	119.0	120.2	108.5	109.6	-	103.8	104.7	387.1	
400.3	-	105.8	107.4	96.9	98.5	-	107.3	108.7	95.7	96.8	-	91.6	92.5	400.3	
413.4	-	95.4	94.1	86.4	84.8	-	95.4	96.7	83.0	84.1	-	79.7	80.6	413.4	
416.7	-	93.7	90.8	84.7	81.4	-	92.4	93.7	79.8	81.0	-	76.7	77.7	416.7	
426.5	-	-	-	-	-	-	84.7	84.7	72.5	71.7	-	67.9	69.0	426.5	
433.1	-	-	-	-	-	-	81.6	78.7	69.9	65.5	-	64.1	63.3	433.1	
439.6	-	-	-	-	-	-	-	-	-	-	-	61.3	57.5	439.6	
449.5	-	-	-	-	-	-	-	-	-	-	-	54.9	48.9	449.5	
0 lb 176,400 lb 352,800 lb 529,200 lb 705,600 lb 882,000 lb 992,100 lb															

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
---	------	------------	------------	------------	------------	------------	------------

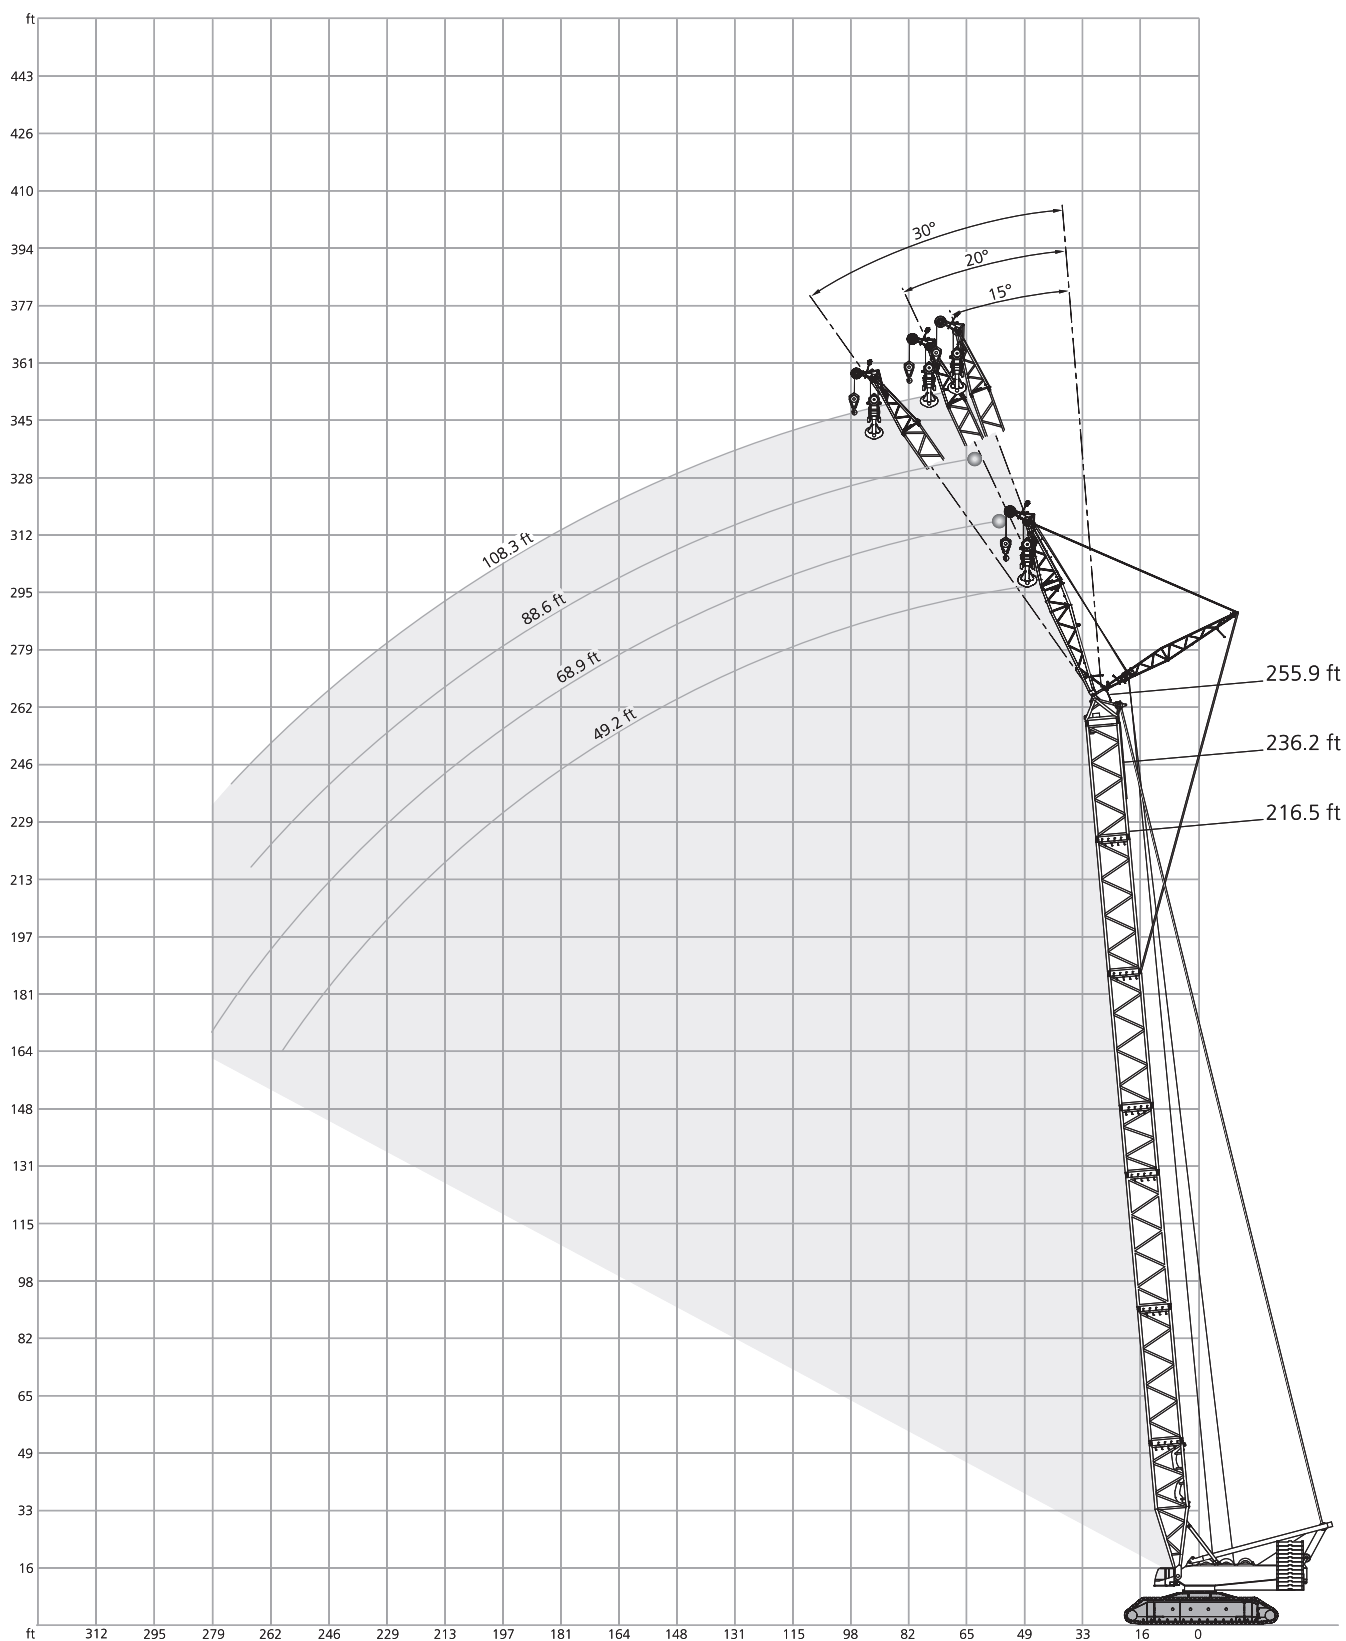

49.2-108.3 ft 31.50 ft 32.2 ft/s 360° 75%														
216.5 ft														
49.2 ft				68.9 ft			88.6 ft			108.3 ft				
15°	20°	30°		15°	20°	30°	15°	20°	30°	15°	20°	30°		
1,000 lb														ft
45.9	551.2	-	-	-	-	-	-	-	-	-	-	-	-	45.9
49.2	551.2	544.5	-	-	-	-	-	-	-	-	-	-	-	49.2
52.5	551.2	544.5	-	504.9	-	-	-	-	-	-	-	-	-	52.5
55.8	518.1	524.7	335.1	504.9	-	-	-	-	-	-	-	-	-	55.8
59.1	487.2	493.8	335.1	482.8	399.0	-	392.4	-	-	-	-	-	-	59.1
65.6	432.1	438.7	330.7	429.9	390.2	-	392.4	302.0	-	313.1	-	-	-	65.6
68.9	409.0	415.6	327.4	407.9	381.4	246.9	382.5	302.0	-	313.1	-	-	-	68.9
72.2	385.8	392.4	324.1	385.8	372.6	246.9	372.6	302.0	-	313.1	-	-	-	72.2
75.5	367.1	372.6	320.8	367.1	362.7	242.5	359.4	295.4	-	305.3	235.9	-	-	75.5
78.7	348.3	352.7	317.5	348.3	352.7	238.1	346.1	288.8	185.2	297.6	235.9	-	-	78.7
85.3	315.3	319.7	310.9	315.3	321.9	231.5	315.3	277.8	185.2	284.4	231.5	-	-	85.3
91.9	286.6	291.0	297.6	286.6	293.2	224.9	288.8	266.8	179.7	271.2	222.7	143.3	-	91.9
98.4	262.4	264.6	273.4	262.4	266.8	218.3	264.6	255.7	174.2	257.9	213.8	143.3	-	98.4
111.5	220.5	222.7	229.3	222.7	227.1	207.2	222.7	229.3	164.2	222.7	198.4	134.5	-	111.5
124.7	183.0	185.2	189.6	187.4	190.7	196.2	191.8	196.2	156.5	191.8	184.1	126.8	-	124.7
137.8	154.3	156.0	159.3	157.6	160.4	165.9	161.5	165.3	148.3	164.8	165.9	120.2	-	137.8
150.9	129.5	130.6	133.9	132.8	135.6	140.5	136.7	140.0	139.4	139.4	143.3	113.5	-	150.9
164.0	108.5	109.8	112.9	112.0	114.8	119.0	116.1	119.3	124.6	118.4	122.4	107.9	-	164.0
177.2	90.9	92.5	95.0	94.6	96.7	100.5	98.2	101.2	106.2	100.5	103.9	103.3	-	177.2
190.3	76.1	77.3	79.4	79.1	81.2	84.7	82.9	85.5	90.2	85.0	88.2	93.7	-	190.3
203.4	63.6	64.6	66.2	66.6	68.1	71.0	69.8	71.9	76.1	71.7	74.3	79.8	-	203.4
206.7	60.7	61.6	63.1	63.6	65.0	67.8	66.7	68.9	72.8	68.7	71.3	76.5	-	206.7
216.5	52.6	53.4	-	55.1	56.7	59.1	58.5	60.5	63.9	60.3	62.8	67.2	-	216.5
226.4	45.4	46.0	-	48.0	49.1	51.1	51.0	52.7	55.7	52.5	54.8	59.0	-	226.4
229.7	43.2	43.7	-	45.7	46.7	-	48.7	50.3	53.1	50.2	52.2	56.4	-	229.7
232.9	41.0	41.4	-	43.5	44.4	-	46.4	48.0	50.7	47.9	49.9	53.9	-	232.9
242.8	34.8	-	-	37.3	38.1	-	40.0	41.4	43.9	41.4	43.3	46.8	-	242.8
246.1	-	-	-	35.3	36.2	-	38.0	39.4	41.7	39.4	41.2	44.6	-	246.1
252.6	-	-	-	31.5	32.2	-	34.1	35.4	-	35.4	37.1	40.3	-	252.6
255.9	-	-	-	29.8	-	-	32.3	33.6	-	33.6	35.3	38.4	-	255.9
262.5	-	-	-	26.2	-	-	28.9	30.0	-	30.0	31.5	34.4	-	262.5
265.7	-	-	-	-	-	-	27.3	28.2	-	28.4	29.8	32.4	-	265.7
269.0	-	-	-	-	-	-	25.7	26.5	-	26.8	28.1	-	-	269.0
282.2	-	-	-	-	-	-	19.6	-	-	20.7	21.8	-	-	282.2
288.7	-	-	-	-	-	-	-	-	-	17.9	18.7	-	-	288.7
295.3	-	-	-	-	-	-	-	-	-	15.2	-	-	-	295.3
298.6	-	-	-	-	-	-	-	-	-	13.9	-	-	-	298.6


 286,600 lb
  374,800 lb
  463,000 lb
  551,200 lb

  49.2-108.3 ft  31.50 ft  32.2 ft/s 360° 75%													
236.2 ft													
49.2 ft				68.9 ft				88.6 ft			108.3 ft		
15°	20°	30°		15°	20°	30°		15°	20°	30°	15°	20°	30°
1,000 lb													
ft													ft
45.9	551.2	-	-	-	-	-	-	-	-	-	-	-	45.9
52.5	531.3	537.9	-	513.7	-	-	-	-	-	-	-	-	52.5
59.1	467.4	474.0	335.1	463.0	392.4	-	-	385.8	-	-	-	-	59.1
65.6	414.5	421.1	332.9	412.3	392.4	-	-	385.8	-	-	308.6	-	65.6
68.9	392.4	399.0	329.6	391.3	384.7	244.7	377.0	297.6	-	308.6	-	-	68.9
72.2	370.4	377.0	326.3	370.4	377.0	244.7	368.2	297.6	-	308.6	-	-	72.2
75.5	351.6	358.3	323.0	351.6	358.3	242.5	350.5	294.3	-	305.3	233.7	-	75.5
78.7	332.9	339.5	319.7	332.9	339.5	240.3	332.9	291.0	-	302.0	233.7	-	78.7
82.0	317.5	323.0	316.4	317.5	324.1	237.0	317.5	285.5	183.0	294.3	233.7	-	82.0
85.3	302.0	306.4	313.1	302.0	308.6	233.7	302.0	280.0	183.0	286.6	233.7	-	85.3
91.9	273.4	277.8	286.6	275.6	280.0	227.1	275.6	271.2	180.8	275.6	224.9	142.2	91.9
98.4	249.1	253.5	260.1	251.3	255.7	220.5	253.5	260.1	175.3	251.3	217.2	142.2	98.4
111.5	209.4	212.7	219.4	211.6	216.1	210.5	213.8	219.4	166.4	213.8	201.7	135.6	111.5
124.7	177.5	179.7	185.2	179.7	184.1	190.7	181.9	187.4	158.7	183.0	188.5	129.0	124.7
137.8	148.3	150.5	154.9	152.1	156.0	161.5	156.0	159.8	151.0	157.1	162.0	121.3	137.8
150.9	122.9	124.6	129.0	126.8	130.1	135.6	131.2	135.0	138.9	133.9	138.3	115.2	150.9
164.0	101.7	103.2	107.0	105.3	108.2	113.4	109.7	113.5	120.0	112.7	117.0	110.0	164.0
177.2	83.8	85.3	88.6	87.5	90.2	94.7	91.9	95.1	101.1	94.5	98.4	102.2	177.2
190.3	69.1	70.7	73.1	72.6	74.7	78.3	76.3	78.9	84.5	78.5	82.2	89.0	190.3
203.4	56.2	57.3	59.5	59.3	61.4	64.8	63.2	65.8	70.3	65.4	68.6	74.3	203.4
216.5	45.4	46.4	48.2	48.4	50.0	52.8	51.8	53.9	58.0	53.6	56.6	61.8	216.5
223.1	40.3	41.2	42.8	43.2	44.8	47.2	46.5	48.5	52.2	48.3	51.1	56.0	223.1
229.7	35.8	36.7	-	38.6	40.0	42.3	41.9	43.8	47.3	43.5	46.2	50.8	229.7
242.8	27.4	28.2	-	30.0	31.1	33.1	33.0	34.8	37.8	34.7	36.9	41.1	242.8
249.3	23.6	24.3	-	26.0	27.1	-	28.9	30.6	33.3	30.6	32.6	36.6	249.3
255.9	20.1	-	-	22.5	23.5	-	25.4	26.9	29.3	26.9	28.8	32.3	255.9
259.2	18.3	-	-	20.7	21.7	-	23.6	25.0	27.3	25.0	27.0	30.2	259.2
269.0	-	-	-	15.9	16.5	-	18.5	19.8	-	19.8	21.7	24.7	269.0
278.9	-	-	-	11.2	-	-	13.8	15.0	-	15.1	16.8	19.4	278.9
282.2	-	-	-	-	-	-	12.3	13.4	-	13.6	15.2	-	282.2
285.4	-	-	-	-	-	-	-	11.9	-	12.1	13.7	-	285.4
288.7	-	-	-	-	-	-	-	-	-	-	12.1	-	288.7


 286,600 lb
 
 374,800 lb
 
 463,000 lb
 
 551,200 lb

49.2-108.3 ft 31.50 ft 32.2 ft/s 360° 75%														
255.9 ft														
49.2 ft				68.9 ft			88.6 ft			108.3 ft				
15°	20°	30°		15°	20°	30°	15°	20°	30°	15°	20°	30°		
1,000 lb														
ft													ft	
49.2	546.7	-	-	-	-	-	-	-	-	-	-	-	49.2	
52.5	509.3	518.1	-	513.7	-	-	-	-	-	-	-	-	52.5	
59.1	449.7	456.4	332.9	463.0	-	-	-	-	-	-	-	-	59.1	
62.3	423.3	429.9	332.9	436.5	388.0	-	390.2	-	-	-	-	-	62.3	
65.6	399.0	405.7	332.9	412.3	388.0	-	390.2	-	-	-	-	-	65.6	
68.9	378.1	383.6	329.6	391.3	375.9	-	372.6	295.4	-	308.6	-	-	68.9	
72.2	357.1	361.6	326.3	370.4	363.8	242.5	354.9	295.4	-	308.6	-	-	72.2	
78.7	319.7	326.3	319.7	332.9	328.5	242.5	321.9	295.4	-	308.6	235.9	-	78.7	
82.0	304.2	309.7	312.0	317.5	313.1	239.2	306.4	289.9	181.9	299.8	235.9	-	82.0	
85.3	288.8	293.2	304.2	302.0	297.6	235.9	291.0	284.4	181.9	291.0	235.9	-	85.3	
91.9	262.4	266.8	275.6	275.6	269.0	229.3	264.6	273.4	181.9	264.6	227.1	-	91.9	
95.1	250.2	254.6	263.5	263.5	257.9	226.0	253.5	261.2	179.7	253.5	223.2	142.2	95.1	
98.4	238.1	242.5	251.3	251.3	246.9	222.7	242.5	249.1	177.5	242.5	219.4	142.2	98.4	
111.5	199.5	203.9	210.5	211.6	207.2	212.7	203.9	210.5	168.7	205.0	205.0	136.7	111.5	
124.7	168.7	170.9	177.5	179.7	174.2	183.0	173.1	178.6	159.8	174.2	180.8	130.1	124.7	
137.8	141.6	144.4	149.4	152.1	148.8	156.0	148.3	152.7	152.7	149.4	154.9	123.5	137.8	
150.9	117.3	119.5	123.5	126.8	124.6	131.2	125.7	129.5	137.8	127.9	132.8	116.8	150.9	
164.0	95.9	98.1	101.6	105.3	102.8	108.8	104.7	108.2	116.1	107.8	112.3	111.3	164.0	
177.2	78.2	80.1	83.2	87.5	84.4	89.7	86.1	89.9	96.5	89.2	93.5	100.8	177.2	
190.3	62.8	64.7	67.7	72.6	69.1	73.5	70.9	74.0	79.4	73.4	77.0	84.5	190.3	
203.4	50.3	51.7	54.2	59.3	55.6	59.3	57.4	60.1	65.5	59.7	63.3	69.9	203.4	
216.5	39.2	40.5	42.7	48.4	44.2	47.5	46.0	48.5	52.9	48.2	51.3	57.0	216.5	
229.7	29.7	30.6	32.3	38.6	34.0	36.9	35.9	38.1	42.1	37.9	40.7	46.0	229.7	
236.2	25.1	26.0	27.8	34.0	29.5	32.0	31.3	33.3	37.0	33.1	35.7	40.8	236.2	
242.8	21.2	22.0	-	30.0	25.4	27.7	27.1	29.1	32.4	28.9	31.3	36.2	242.8	
255.9	13.7	14.4	-	22.5	17.5	19.4	19.3	21.1	24.0	20.9	23.3	27.3	255.9	
259.2	11.9	12.6	-	20.7	15.7	-	17.5	19.1	22.0	19.1	21.3	25.2	259.2	
265.7	-	-	-	17.4	12.1	-	14.0	15.5	18.3	15.5	17.7	21.3	265.7	
269.0	-	-	-	15.9	-	-	12.3	13.8	16.5	13.8	16.0	19.5	269.0	
272.3	-	-	-	14.3	-	-	-	12.1	14.8	12.1	14.3	17.7	272.3	
275.6	-	-	-	12.8	-	-	-	-	13.0	-	12.6	15.9	275.6	
278.9	-	-	-	11.2	-	-	-	-	-	-	-	14.1	278.9	
282.2	-	-	-	-	-	-	-	-	-	-	-	12.3	282.2	

 286,600 lb
  374,800 lb
  463,000 lb
  551,200 lb

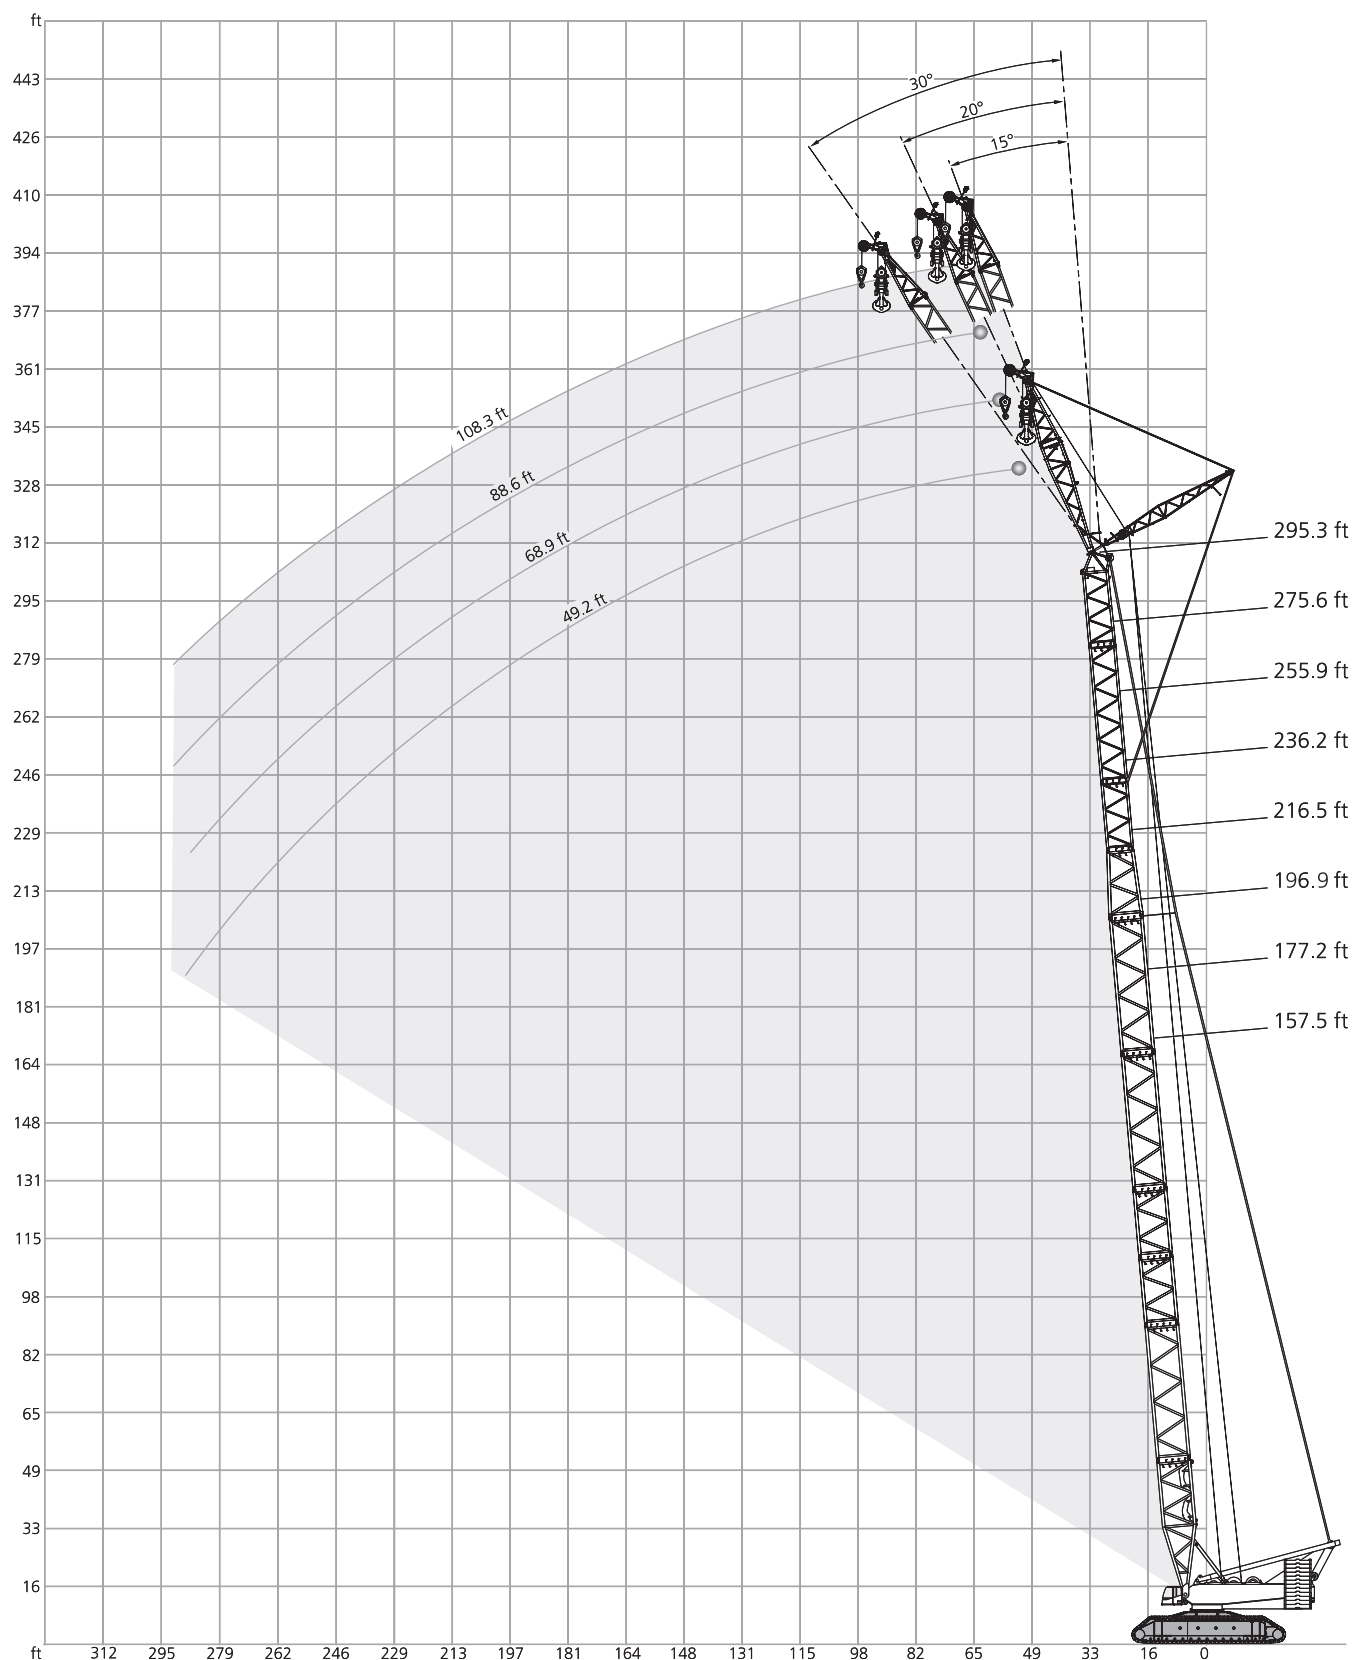

  49.2-108.3 ft  31.50 ft  32.2 ft/s 360° 75%												
157.5 ft												
49.2 ft			68.9 ft			88.6 ft			108.3 ft			
15°	20°	30°	15°	20°	30°	15°	20°	30°	15°	20°	30°	
1,000 lb												
ft												ft
39.4	551.2	-	-	-	-	-	-	-	-	-	-	39.4
42.7	551.2	551.2	-	-	-	-	-	-	-	-	-	42.7
45.9	551.2	551.2	-	-	-	-	-	-	-	-	-	45.9
49.2	551.2	551.2	343.9	524.7	-	-	-	-	-	-	-	49.2
52.5	551.2	540.1	340.6	507.1	407.9	-	394.6	-	-	-	-	52.5
59.1	537.9	514.8	332.9	474.0	395.7	-	388.0	308.6	-	315.3	-	59.1
62.3	524.7	500.4	328.5	458.6	383.6	251.3	381.4	308.6	-	315.3	-	62.3
65.6	497.1	487.2	323.0	444.2	373.7	248.0	370.4	303.1	-	310.9	-	65.6
68.9	469.6	474.0	317.5	429.9	363.8	244.7	359.4	297.6	-	306.4	246.9	68.9
72.2	447.5	451.9	313.8	418.1	354.2	240.3	349.1	289.5	187.4	297.6	241.8	72.2
78.7	403.4	407.9	306.4	394.6	335.1	231.5	328.5	273.4	187.4	280.0	231.5	78.7
85.3	363.8	367.1	297.6	361.6	319.7	223.2	310.9	260.1	180.8	265.7	220.5	85.3
91.9	324.1	326.3	288.8	328.5	304.2	215.0	293.2	246.9	174.2	251.3	209.4	91.9
98.4	295.4	297.6	280.0	298.7	288.8	208.3	278.9	235.9	167.6	238.1	199.5	98.4
111.5	245.8	248.0	250.2	248.0	251.3	195.7	246.9	215.5	155.4	214.4	181.3	111.5
124.7	208.3	210.0	212.2	210.5	212.7	184.6	212.7	198.4	145.5	195.1	166.4	124.7
137.8	179.7	180.4	182.6	181.5	183.4	173.4	183.7	180.8	137.1	177.5	154.3	137.8
150.9	155.4	155.4	157.6	156.5	157.6	160.9	158.7	160.9	129.0	159.8	143.3	150.9
164.0	137.1	137.1	138.2	138.2	139.3	141.8	139.6	141.8	123.1	140.7	133.7	164.0
167.3	132.5	132.5	133.4	133.6	134.7	137.1	134.8	137.1	121.6	136.0	131.4	167.3
177.2	120.9	120.7	-	122.0	122.9	124.6	123.2	124.9	117.6	124.0	122.7	177.2
183.7	113.9	113.5	-	115.0	115.8	116.8	116.3	117.6	115.0	116.9	116.5	183.7
190.3	106.9	-	-	108.0	108.7	-	109.3	110.2	112.4	109.8	110.2	190.3
203.4	-	-	-	96.7	97.0	-	98.0	98.9	100.1	98.2	99.2	203.4
210.0	-	-	-	91.1	-	-	92.4	93.3	-	92.4	93.7	210.0
216.5	-	-	-	-	-	-	87.5	88.2	-	87.5	88.7	216.5
223.1	-	-	-	-	-	-	82.7	83.1	-	82.7	83.7	223.1
229.7	-	-	-	-	-	-	77.8	-	-	77.8	78.7	229.7
239.5	-	-	-	-	-	-	-	-	-	71.8	72.3	239.5
242.8	-	-	-	-	-	-	-	-	-	69.7	-	242.8
249.3	-	-	-	-	-	-	-	-	-	65.7	-	249.3

 286,600 lb
  374,800 lb
  463,000 lb
  551,200 lb

  49.2-108.3 ft  31.50 ft  32.2 ft/s 360° 75%													
177.2 ft													
49.2 ft				68.9 ft				88.6 ft			108.3 ft		
15°	20°	30°		15°	20°	30°		15°	20°	30°	15°	20°	30°
ft	1,000 lb												ft
42.7	551.2	-	-	-	-	-	-	-	-	-	-	-	42.7
45.9	551.2	551.2	-	-	-	-	-	-	-	-	-	-	45.9
49.2	551.2	551.2	-	-	-	-	-	-	-	-	-	-	49.2
52.5	551.2	544.5	339.5	515.9	507.1	401.2	-	-	-	-	-	-	52.5
55.8	551.2	537.9	339.5	498.2	401.2	-	401.2	-	-	-	-	-	55.8
59.1	528.0	524.7	335.1	482.8	395.7	-	394.6	-	-	-	-	-	59.1
62.3	504.9	511.5	330.7	467.4	390.2	249.1	388.0	313.1	-	319.7	-	-	62.3
65.6	478.4	483.9	326.3	454.2	380.3	249.1	377.0	308.6	-	315.3	-	-	65.6
68.9	451.9	456.4	321.9	440.9	370.4	249.1	366.0	304.2	-	310.9	244.7	-	68.9
72.2	430.6	435.0	318.2	421.8	362.3	244.0	355.7	296.2	-	302.0	241.8	-	72.2
75.5	409.3	413.7	314.5	402.7	354.2	238.8	345.4	288.1	189.6	293.2	238.8	-	75.5
78.7	388.0	392.4	310.9	383.6	346.1	233.7	335.1	280.0	189.6	284.4	235.9	-	78.7
85.3	353.8	357.1	303.1	352.7	330.7	226.5	319.7	266.8	183.0	271.2	224.9	146.6	85.3
91.9	319.7	321.9	295.4	321.9	315.3	219.4	304.2	253.5	176.4	257.9	213.8	145.5	91.9
98.4	291.0	293.2	282.2	293.2	292.1	212.7	286.6	242.5	170.3	245.8	204.5	140.0	98.4
111.5	241.4	242.5	246.9	243.6	246.9	200.6	246.9	222.7	158.7	223.2	186.8	130.1	111.5
124.7	203.9	204.5	207.8	206.1	208.3	189.6	208.3	203.9	148.8	202.8	172.0	121.8	124.7
137.8	174.9	176.0	177.8	176.7	178.9	174.9	178.9	181.1	140.7	180.0	159.5	114.6	137.8
150.9	149.9	151.0	152.1	151.0	153.2	156.5	153.2	155.4	133.4	154.3	147.7	107.8	150.9
164.0	131.5	131.9	133.7	132.6	134.1	136.7	134.8	136.3	126.8	135.2	134.5	102.4	164.0
177.2	115.2	115.4	116.5	116.4	117.5	119.5	118.5	119.6	118.3	118.7	120.7	97.4	177.2
180.4	111.6	111.9	112.4	112.9	114.0	115.9	114.9	116.1	115.7	115.2	117.2	96.3	180.4
190.3	100.8	101.4	-	102.3	103.4	104.9	104.1	105.4	108.0	104.7	106.5	93.0	190.3
200.1	91.8	91.9	-	93.3	94.2	95.5	95.0	96.3	98.8	95.6	97.3	90.4	200.1
203.4	88.8	-	-	90.2	91.2	-	92.0	93.3	95.7	92.5	94.3	89.5	203.4
206.7	85.8	-	-	87.2	88.1	-	89.0	90.3	92.6	89.5	91.2	88.6	206.7
216.5	-	-	-	79.3	79.8	-	81.1	82.2	83.8	81.4	83.0	83.6	216.5
219.8	-	-	-	76.8	77.2	-	78.6	79.7	-	78.9	80.5	81.5	219.8
226.4	-	-	-	71.9	-	-	73.7	74.6	-	73.9	75.3	77.3	226.4
229.7	-	-	-	-	-	-	71.2	72.1	-	71.4	72.8	75.2	229.7
236.2	-	-	-	-	-	-	67.0	67.8	-	67.1	68.4	70.5	236.2
239.5	-	-	-	-	-	-	64.9	65.7	-	65.0	66.3	-	239.5
242.8	-	-	-	-	-	-	62.8	-	-	62.8	64.1	-	242.8
246.1	-	-	-	-	-	-	61.1	-	-	61.0	61.9	-	246.1
255.9	-	-	-	-	-	-	-	-	-	55.6	56.4	-	255.9
265.7	-	-	-	-	-	-	-	-	-	50.5	-	-	265.7


 286,600 lb
 
 374,800 lb
 
 463,000 lb
 
 551,200 lb

  49.2-108.3 ft  31.50 ft  32.2 ft/s 360° 75%													
196.9 ft													
49.2 ft 68.9 ft 88.6 ft 108.3 ft													
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°													
ft	1,000 lb												ft
42.7	551.2	-	-	-	-	-	-	-	-	-	-	-	42.7
45.9	551.2	551.2	-	-	-	-	-	-	-	-	-	-	45.9
49.2	551.2	551.2	-	507.1	-	-	-	-	-	-	-	-	49.2
52.5	550.1	550.1	-	507.1	-	-	-	-	-	-	-	-	52.5
55.8	549.0	549.0	337.3	507.1	405.7	-	394.6	-	-	-	-	-	55.8
59.1	518.1	520.3	335.1	491.6	401.2	-	394.6	-	-	-	-	-	59.1
62.3	487.2	491.6	332.9	476.2	396.8	-	394.6	306.4	-	315.3	-	-	62.3
65.6	460.8	465.2	329.6	453.1	386.9	249.1	383.6	306.4	-	315.3	-	-	65.6
72.2	413.7	418.1	322.6	410.1	368.9	243.6	363.0	299.8	-	307.2	240.3	-	72.2
75.5	393.2	397.6	318.9	390.2	360.8	240.9	353.5	293.2	187.4	299.1	240.3	-	75.5
78.7	372.6	377.0	315.3	370.4	352.7	238.1	343.9	286.6	187.4	291.0	240.3	-	78.7
85.3	341.7	345.0	307.5	339.5	332.9	230.4	325.2	273.4	183.0	276.7	229.3	-	85.3
88.6	326.3	329.0	303.7	324.1	323.0	226.5	315.8	266.8	180.8	269.5	223.8	144.4	88.6
91.9	310.9	313.1	299.8	308.6	313.1	222.7	306.4	260.1	178.6	262.4	218.3	144.4	91.9
98.4	284.4	286.6	282.2	284.4	288.8	216.1	284.4	249.1	172.5	251.3	208.9	140.5	98.4
111.5	236.4	238.7	242.5	239.2	242.5	203.9	241.4	229.3	161.5	229.8	191.8	132.3	111.5
124.7	198.4	200.1	203.4	201.2	203.4	193.5	203.9	205.6	152.1	203.9	176.9	124.0	124.7
137.8	169.4	170.5	173.4	171.6	173.4	176.4	174.5	177.5	144.0	175.6	164.2	116.8	137.8
150.9	144.4	145.5	147.7	146.6	147.7	152.1	148.8	151.0	136.7	149.9	153.2	110.0	150.9
164.0	125.3	126.4	128.6	127.5	129.3	132.3	129.7	131.9	129.3	130.8	133.4	104.6	164.0
177.2	108.5	109.5	111.5	110.6	112.5	114.8	112.8	114.9	118.2	113.8	116.1	99.6	177.2
190.3	93.9	94.8	96.3	95.9	97.2	99.6	98.1	100.1	103.4	99.0	101.4	95.2	190.3
193.6	90.9	91.8	92.8	92.9	94.1	96.5	95.0	96.9	100.2	95.9	98.2	93.7	193.6
203.4	82.0	82.7	-	83.7	84.7	86.9	85.8	87.5	90.5	86.5	88.6	89.1	203.4
213.3	73.5	74.1	-	75.1	75.9	77.6	77.0	78.6	81.3	77.7	79.7	83.3	213.3
216.5	70.9	71.4	-	72.5	73.4	-	74.5	76.1	78.6	75.1	77.1	80.5	216.5
226.4	63.9	-	-	65.1	65.9	-	66.8	68.5	70.6	67.5	69.4	72.4	226.4
229.7	-	-	-	62.8	63.5	-	64.6	65.9	67.9	65.0	66.8	69.7	229.7
232.9	-	-	-	60.8	61.4	-	62.6	63.8	65.5	63.0	64.7	67.4	232.9
236.2	-	-	-	58.8	59.3	-	60.6	61.7	-	60.9	62.5	65.0	236.2
242.8	-	-	-	54.7	-	-	56.5	57.5	-	56.8	58.3	60.6	242.8
249.3	-	-	-	-	-	-	52.5	53.4	-	52.7	54.0	56.2	249.3
252.6	-	-	-	-	-	-	50.7	51.4	-	50.9	52.2	-	252.6
255.9	-	-	-	-	-	-	48.9	-	-	49.0	50.4	-	255.9
262.5	-	-	-	-	-	-	45.4	-	-	45.6	46.7	-	262.5
269.0	-	-	-	-	-	-	-	-	-	42.3	43.2	-	269.0
272.3	-	-	-	-	-	-	-	-	-	40.8	41.7	-	272.3
282.2	-	-	-	-	-	-	-	-	-	36.4	-	-	282.2

 286,600 lb
  374,800 lb
  463,000 lb
  551,200 lb

  49.2-108.3 ft  31.50 ft  32.2 ft/s 360° 75%													
216.5 ft													
49.2 ft				68.9 ft				88.6 ft			108.3 ft		
15°	20°	30°		15°	20°	30°		15°	20°	30°	15°	20°	30°
ft	1,000 lb												ft
45.9	551.2	-	-	-	-	-	-	-	-	-	-	-	45.9
49.2	551.2	551.2	-	-	-	-	-	-	-	-	-	-	49.2
52.5	541.2	544.5	-	-	-	-	-	-	-	-	-	-	52.5
55.8	531.3	537.9	348.3	522.5	416.7	-	-	-	-	-	-	-	55.8
59.1	501.6	507.1	346.1	493.8	414.5	-	405.7	-	-	-	-	-	59.1
65.6	446.4	450.8	340.6	440.9	401.2	260.1	399.0	315.3	-	319.7	-	-	65.6
72.2	401.2	405.7	333.6	397.6	381.4	252.4	380.7	303.1	-	312.0	255.7	-	72.2
78.7	361.6	366.0	326.3	359.4	363.8	244.7	357.1	291.0	194.0	304.2	242.5	-	78.7
85.3	331.8	335.1	318.6	329.6	334.0	237.0	327.4	278.9	187.4	288.8	232.6	-	85.3
88.6	316.9	319.7	314.7	314.7	319.1	233.1	312.5	272.8	184.1	281.1	227.6	151.0	88.6
91.9	302.0	304.2	310.9	299.8	304.2	229.3	297.6	266.8	180.8	273.4	222.7	147.7	91.9
98.4	278.9	281.1	286.6	276.7	281.1	222.7	275.6	255.7	174.7	260.1	213.3	142.7	98.4
111.5	234.2	236.4	240.3	234.8	238.1	210.0	236.4	233.7	163.7	232.6	196.2	133.4	111.5
124.7	196.2	197.9	201.2	199.0	201.2	196.8	202.3	205.6	154.3	202.3	181.3	125.1	124.7
137.8	166.8	168.3	171.2	169.0	171.2	176.4	172.3	175.3	146.2	173.4	166.4	117.9	137.8
150.9	141.1	143.3	145.5	143.3	145.5	149.9	146.6	148.8	138.9	147.7	151.0	111.3	150.9
164.0	122.7	124.2	126.4	124.9	126.4	130.1	127.5	129.7	128.6	128.6	131.2	106.3	164.0
177.2	105.9	107.0	109.1	108.0	109.3	112.4	110.2	112.4	115.9	111.3	113.6	101.6	177.2
190.3	90.6	91.7	93.5	92.4	94.1	96.8	94.8	96.8	100.8	95.7	98.3	97.2	190.3
203.4	78.6	79.5	80.8	80.2	81.6	84.0	82.3	84.1	87.5	83.2	85.5	87.8	203.4
206.7	75.5	76.5	77.6	77.1	78.5	80.8	79.2	81.0	84.2	80.1	82.3	85.5	206.7
216.5	67.5	68.3	-	69.0	69.9	72.0	70.8	72.5	75.5	71.5	73.7	77.7	216.5
226.4	60.5	61.1	-	61.7	62.6	64.2	63.4	64.8	67.5	63.9	65.9	69.5	226.4
229.7	58.2	58.6	-	59.3	60.2	-	61.1	62.4	65.0	61.5	63.5	66.8	229.7
232.9	56.2	56.4	-	57.2	58.1	-	59.0	60.3	62.8	59.4	61.3	64.6	232.9
242.8	50.0	-	-	51.0	51.9	-	52.8	54.0	56.0	53.1	54.8	57.8	242.8
246.1	-	-	-	48.9	49.8	-	50.8	51.9	53.8	51.0	52.7	55.6	246.1
252.6	-	-	-	45.5	46.1	-	47.0	47.8	-	47.2	48.5	51.4	252.6
255.9	-	-	-	43.8	-	-	45.3	46.1	-	45.5	46.7	49.4	255.9
262.5	-	-	-	40.3	-	-	42.0	42.7	-	42.0	43.2	45.5	262.5
265.7	-	-	-	-	-	-	40.3	41.0	-	40.3	41.4	43.7	265.7
269.0	-	-	-	-	-	-	38.6	39.2	-	38.6	39.7	-	269.0
278.9	-	-	-	-	-	-	34.2	-	-	34.2	35.2	-	278.9
282.2	-	-	-	-	-	-	-	-	-	32.7	33.7	-	282.2
288.7	-	-	-	-	-	-	-	-	-	29.8	30.6	-	288.7
295.3	-	-	-	-	-	-	-	-	-	27.2	-	-	295.3
298.6	-	-	-	-	-	-	-	-	-	26.0	-	-	298.6

 286,600 lb
  374,800 lb
  463,000 lb
  551,200 lb

  49.2-108.3 ft  31.50 ft  32.2 ft/s 360° 75%													
236.2 ft													
49.2 ft				68.9 ft				88.6 ft			108.3 ft		
15°	20°	30°		15°	20°	30°		15°	20°	30°	15°	20°	30°
ft	1,000 lb												ft
45.9	551.2	-	-	-	-	-	-	-	-	-	-	-	45.9
49.2	551.2	549.0	-	-	-	-	-	-	-	-	-	-	49.2
52.5	531.3	533.5	-	511.5	-	-	-	-	-	-	-	-	52.5
59.1	482.8	489.4	339.5	477.3	399.0	-	394.6	-	-	-	-	-	59.1
65.6	431.0	436.5	335.1	426.6	395.7	-	390.2	308.6	-	306.4	-	-	65.6
68.9	407.9	412.3	330.7	403.4	392.4	249.1	385.8	305.3	-	305.3	-	-	68.9
72.2	388.7	393.2	327.8	385.1	379.2	247.7	372.6	302.0	-	304.2	-	-	72.2
75.5	369.6	374.1	324.8	366.7	366.0	246.2	359.4	298.7	-	303.1	242.5	-	75.5
78.7	350.5	354.9	321.9	348.3	352.7	244.7	346.1	295.4	186.3	302.0	242.5	-	78.7
85.3	320.8	325.2	312.0	319.7	324.1	238.1	317.5	283.3	184.1	289.9	233.7	-	85.3
91.9	291.0	295.4	302.0	291.0	295.4	231.5	288.8	271.2	181.9	277.8	224.9	146.6	91.9
98.4	269.0	272.3	278.9	267.9	272.3	225.4	266.8	260.1	176.4	261.2	216.1	142.7	98.4
111.5	228.2	230.4	235.9	227.6	232.0	213.3	228.2	232.6	165.9	227.6	199.5	134.5	111.5
124.7	192.9	194.6	199.0	194.6	198.4	196.8	196.8	200.6	157.1	196.8	185.2	126.8	124.7
137.8	163.5	165.0	168.7	165.7	168.7	173.1	169.0	172.0	149.5	170.1	168.3	120.2	137.8
150.9	137.8	140.0	142.2	140.0	142.2	146.6	143.3	145.5	142.2	144.4	147.7	113.5	150.9
164.0	118.8	120.2	123.1	120.9	123.1	126.8	123.5	126.4	128.2	125.3	127.9	108.4	164.0
177.2	101.7	102.7	105.5	103.6	105.7	108.9	105.9	108.9	113.2	107.7	110.2	103.5	177.2
190.3	86.4	87.5	89.5	88.2	89.9	93.0	90.6	93.0	97.2	91.7	94.6	99.0	190.3
203.4	73.9	74.7	76.8	75.7	77.5	80.1	78.1	80.2	84.0	79.1	81.6	86.2	203.4
216.5	63.3	64.2	65.5	64.7	66.1	68.2	66.8	68.4	71.7	67.6	69.4	74.1	216.5
223.1	58.4	59.2	60.2	59.8	61.1	63.1	61.7	63.3	66.2	62.5	64.4	68.3	223.1
229.7	53.6	54.2	-	54.9	56.0	58.0	56.7	58.2	61.1	57.3	59.3	63.3	229.7
239.5	47.5	48.1	-	48.5	49.5	51.1	50.0	51.8	54.3	50.7	52.7	56.4	239.5
242.8	45.5	46.1	-	46.5	47.5	-	48.1	49.6	52.1	48.6	50.5	54.2	242.8
249.3	41.7	42.1	-	42.5	43.4	-	44.3	45.6	47.8	44.5	46.3	49.6	249.3
255.9	38.3	-	-	39.2	40.0	-	40.9	42.0	43.9	41.0	42.7	45.7	255.9
259.2	36.6	-	-	37.5	38.3	-	39.1	40.2	41.9	39.2	40.9	43.8	259.2
265.7	-	-	-	34.1	34.8	-	35.7	36.6	-	35.7	37.3	39.9	265.7
269.0	-	-	-	32.4	-	-	34.0	34.8	-	34.0	35.5	37.9	269.0
278.9	-	-	-	28.2	-	-	29.3	30.4	-	29.3	30.7	32.8	278.9
282.2	-	-	-	-	-	-	27.9	28.9	-	27.9	29.1	-	282.2
285.4	-	-	-	-	-	-	26.5	27.3	-	26.5	27.7	-	285.4
295.3	-	-	-	-	-	-	22.6	-	-	22.6	23.7	-	295.3
298.6	-	-	-	-	-	-	21.4	-	-	21.4	22.4	-	298.6
305.1	-	-	-	-	-	-	-	-	-	18.9	19.8	-	305.1
308.4	-	-	-	-	-	-	-	-	-	17.6	-	-	308.4
315.0	-	-	-	-	-	-	-	-	-	15.4	-	-	315.0

 286,600 lb
  374,800 lb
  463,000 lb
  551,200 lb

  49.2-108.3 ft  31.50 ft  32.2 ft/s 360° 75%													
255.9 ft													
49.2 ft 68.9 ft 88.6 ft 108.3 ft													
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°													
ft	1,000 lb												ft
49.2	551.2	-	-	-	-	-	-	-	-	-	-	-	49.2
52.5	523.6	533.5	-	-	-	-	-	-	-	-	-	-	52.5
55.8	496.0	502.7	-	-	-	-	-	-	-	-	-	-	55.8
59.1	468.5	474.0	341.7	487.2	461.9	412.3	-	-	-	-	-	-	59.1
62.3	440.9	445.3	341.7	436.5	412.3	-	383.6	-	-	-	-	-	62.3
65.6	417.8	422.2	340.6	414.5	405.7	-	383.6	-	-	-	-	-	65.6
68.9	394.6	399.0	339.5	392.4	399.0	-	383.6	315.3	-	293.2	-	-	68.9
72.2	376.3	380.7	336.6	374.1	380.7	257.9	367.4	310.1	-	293.2	-	-	72.2
75.5	357.9	362.3	333.6	355.7	362.3	254.6	351.3	305.0	-	293.2	251.3	-	75.5
78.7	339.5	343.9	330.7	337.3	343.9	251.3	335.1	299.8	-	293.2	249.1	-	78.7
82.0	325.2	329.6	321.3	323.5	329.6	247.5	321.3	293.8	192.9	289.4	244.2	-	82.0
85.3	310.9	315.3	312.0	309.7	315.3	243.6	307.5	287.7	190.0	285.5	239.2	-	85.3
91.9	282.2	286.6	293.2	282.2	286.6	235.9	280.0	275.6	184.1	277.8	229.3	148.8	91.9
98.4	260.1	264.6	270.1	260.1	264.6	229.3	259.0	259.0	178.6	256.8	220.5	144.4	98.4
111.5	221.0	224.9	229.3	221.0	224.9	217.2	221.6	226.0	168.1	219.9	203.9	135.6	111.5
124.7	188.5	191.3	195.1	190.1	192.9	197.9	191.3	195.1	159.3	190.1	188.5	127.9	124.7
137.8	160.6	162.4	165.7	163.5	165.7	170.9	165.0	168.3	151.8	165.0	169.0	121.3	137.8
150.9	135.6	136.7	140.0	137.8	140.0	144.4	140.0	143.3	144.4	142.2	145.5	114.6	150.9
164.0	115.9	117.3	120.2	118.1	120.2	124.6	120.2	123.5	127.5	122.4	125.7	109.8	164.0
177.2	98.3	99.8	102.3	100.4	102.4	106.5	102.5	105.6	110.8	104.4	107.6	104.0	177.2
190.3	82.9	84.2	86.4	84.7	86.6	90.2	87.1	89.7	94.4	88.2	91.3	97.2	190.3
203.4	70.4	71.6	73.4	72.0	73.6	76.9	74.1	76.7	81.0	75.3	78.3	83.6	203.4
216.5	59.5	60.7	62.3	61.0	62.6	65.3	63.3	65.2	68.7	64.0	66.6	70.8	216.5
229.7	49.8	50.7	52.0	51.1	52.5	54.7	53.1	54.9	58.0	53.6	56.0	60.2	229.7
236.2	45.9	46.7	47.6	47.0	48.3	50.3	48.9	50.4	53.3	49.3	51.4	55.4	236.2
242.8	41.9	42.6	-	42.9	44.1	46.0	44.8	46.1	48.8	45.0	47.1	50.7	242.8
255.9	34.6	35.1	-	35.4	36.4	37.7	37.0	38.4	40.8	37.3	39.2	42.5	255.9
265.7	29.5	30.0	-	30.2	31.1	-	31.7	33.1	35.2	32.0	33.8	36.7	265.7
269.0	28.0	-	-	28.7	29.3	-	30.0	31.3	33.3	30.2	32.0	34.8	269.0
272.3	26.6	-	-	27.2	27.8	-	28.5	29.5	31.7	28.7	30.3	33.1	272.3
275.6	25.1	-	-	25.8	26.3	-	27.1	28.1	-	27.3	28.7	31.5	275.6
282.2	-	-	-	22.9	23.4	-	24.3	25.2	-	24.3	25.7	28.1	282.2
292.0	-	-	-	18.8	-	-	20.1	20.9	-	20.1	21.4	23.6	292.0
295.3	-	-	-	17.6	-	-	18.9	19.6	-	18.8	20.1	-	295.3
301.8	-	-	-	-	-	-	16.4	17.0	-	16.2	17.4	-	301.8
308.4	-	-	-	-	-	-	13.9	-	-	13.7	14.8	-	308.4
315.0	-	-	-	-	-	-	11.7	-	-	11.5	12.4	-	315.0
318.2	-	-	-	-	-	-	-	-	-	-	11.2	-	318.2


 286,600 lb
  374,800 lb
  463,000 lb
  551,200 lb

  49.2-108.3 ft  31.50 ft  32.2 ft/s 360° 75%												
275.6 ft												
49.2 ft			68.9 ft			88.6 ft			108.3 ft			
15°	20°	30°	15°	20°	30°	15°	20°	30°	15°	20°	30°	
1,000 lb												
ft												ft
49.2	529.1	-	-	-	-	-	-	-	-	-	-	49.2
52.5	503.8	471.8	-	-	-	-	-	-	-	-	-	52.5
55.8	478.4	471.8	-	-	-	-	-	-	-	-	-	55.8
59.1	453.1	451.9	-	-	-	-	-	-	-	-	-	59.1
62.3	427.7	432.1	328.5	410.1	352.7	-	326.3	-	-	-	-	62.3
65.6	405.7	410.1	328.5	394.6	352.7	-	326.3	-	-	-	-	65.6
68.9	383.6	388.0	328.5	379.2	352.7	-	326.3	277.8	-	269.0	-	68.9
72.2	365.2	369.6	325.5	361.6	346.1	246.9	325.5	277.8	-	269.0	-	72.2
78.7	328.5	332.9	319.7	326.3	332.9	246.9	324.1	277.8	-	269.0	224.9	78.7
82.0	314.7	319.1	310.9	313.1	319.1	243.6	311.4	277.2	185.2	268.4	224.9	82.0
85.3	300.9	305.3	302.0	299.8	305.3	240.3	298.7	276.7	185.2	267.9	224.9	85.3
91.9	273.4	277.8	284.4	273.4	277.8	233.7	273.4	275.6	185.2	266.8	224.9	91.9
95.1	262.9	266.8	273.4	262.9	267.3	230.9	262.9	265.7	182.4	257.4	222.4	95.1
98.4	252.4	255.7	262.4	252.4	256.8	228.2	252.4	255.7	179.7	248.0	219.9	98.4
111.5	214.4	217.2	222.7	214.4	218.8	215.5	215.0	219.4	169.8	213.3	207.2	111.5
124.7	183.5	186.3	190.7	183.5	187.4	194.0	184.6	189.0	160.9	184.1	187.4	124.7
137.8	157.3	159.5	163.5	158.0	161.3	167.2	159.8	163.9	153.2	159.8	164.2	137.8
150.9	132.3	134.5	137.8	134.5	137.8	142.2	137.8	141.1	146.6	137.8	142.2	150.9
164.0	112.6	114.5	117.7	114.8	117.5	121.6	117.8	120.5	126.8	118.7	122.4	164.0
177.2	95.0	96.6	99.6	97.1	99.4	103.2	99.8	102.3	108.4	101.0	104.4	177.2
190.3	79.6	80.9	83.6	81.4	83.6	87.1	83.8	86.4	91.5	84.9	88.2	190.3
203.4	67.4	68.5	70.5	68.9	70.5	73.6	71.0	73.2	78.1	71.7	74.7	203.4
216.5	56.0	57.1	59.1	57.5	59.1	62.2	59.5	61.9	65.9	60.4	63.3	216.5
229.7	46.5	47.4	48.9	47.6	49.2	51.6	49.6	51.6	54.9	50.3	52.7	229.7
242.8	38.3	39.2	40.6	39.4	40.6	42.9	41.1	42.9	45.9	41.6	43.9	242.8
249.3	34.2	35.1	36.4	35.3	36.4	38.6	36.8	38.6	41.4	37.3	39.5	249.3
255.9	30.6	31.3	-	31.6	32.7	34.7	33.3	34.9	37.7	33.6	35.8	255.9
269.0	24.3	24.9	-	24.9	25.8	27.6	26.5	27.8	30.2	26.7	28.4	269.0
282.2	18.7	19.0	-	19.2	19.9	-	20.4	21.8	23.7	20.6	22.3	282.2
288.7	15.9	-	-	16.3	17.0	-	17.4	18.7	20.5	17.6	19.2	288.7
292.0	14.6	-	-	15.0	15.7	-	16.2	17.4	-	16.3	17.9	292.0
295.3	-	-	-	13.8	14.5	-	14.9	16.1	-	15.0	16.5	295.3
298.6	-	-	-	12.5	13.2	-	13.7	14.8	-	13.7	15.2	298.6
301.8	-	-	-	11.2	-	-	12.5	13.4	-	12.3	13.9	301.8
305.1	-	-	-	-	-	-	11.2	12.1	-	11.0	12.6	305.1
308.4	-	-	-	-	-	-	-	-	-	-	11.2	308.4


 286,600 lb
 
 374,800 lb
 
 463,000 lb
 
 551,200 lb

49.2-108.3 ft 31.50 ft 32.2 ft/s 360° 75%																		
295.3 ft																		
49.2 ft				68.9 ft				88.6 ft				108.3 ft						
15°		20°		30°		15°		20°		30°		15°		20°		30°		
ft		1,000 lb													ft			
52.5	480.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	52.5	
55.8	463.0	454.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	55.8	
59.1	437.6	436.5	-	392.4	-	-	-	-	-	-	-	-	-	-	-	-	59.1	
62.3	412.3	418.9	330.7	392.4	363.8	-	-	-	-	-	-	-	-	-	-	-	62.3	
65.6	391.3	396.8	330.7	380.3	363.8	-	321.9	-	-	-	-	-	-	-	-	-	65.6	
72.2	352.7	357.1	329.2	351.3	350.5	-	318.6	293.2	-	260.1	-	-	-	-	-	-	72.2	
75.5	335.1	339.5	327.8	334.4	337.3	255.7	316.9	293.2	-	260.1	-	-	-	-	-	-	75.5	
78.7	317.5	321.9	326.3	317.5	324.1	253.5	315.3	293.2	-	260.1	238.1	-	-	-	-	-	78.7	
85.3	291.0	295.4	300.9	291.0	296.5	246.9	289.9	282.2	188.5	260.1	235.9	-	-	-	-	-	85.3	
91.9	264.6	269.0	275.6	264.6	269.0	240.3	264.6	271.2	186.3	260.1	233.7	-	-	-	-	-	91.9	
95.1	254.1	258.5	264.6	254.1	258.5	237.0	254.1	260.7	183.5	250.8	229.6	147.7	-	-	-	-	95.1	
98.4	243.6	248.0	253.5	243.6	248.0	233.7	243.6	250.2	180.8	241.4	225.4	145.5	-	-	-	-	98.4	
111.5	206.7	210.0	215.0	206.7	210.5	214.4	207.2	212.7	170.9	206.7	206.7	137.2	-	-	-	-	111.5	
124.7	176.9	179.1	184.1	176.9	180.2	187.4	178.0	182.4	162.6	177.5	183.0	130.1	-	-	-	-	124.7	
137.8	151.8	154.0	158.0	152.5	155.4	161.7	153.6	157.6	153.6	153.6	158.7	123.8	-	-	-	-	137.8	
150.9	129.0	131.2	134.5	131.2	133.4	138.9	132.3	135.6	143.3	132.3	136.7	117.9	-	-	-	-	150.9	
164.0	109.0	110.9	114.2	111.2	113.7	118.6	113.5	116.8	123.5	114.5	118.6	112.8	-	-	-	-	164.0	
177.2	91.1	92.7	96.0	93.2	95.8	100.2	96.0	99.2	105.1	97.4	101.3	103.9	-	-	-	-	177.2	
190.3	75.6	77.2	79.8	77.6	79.8	83.8	80.0	82.9	88.2	81.1	84.7	91.3	-	-	-	-	190.3	
203.4	63.3	64.7	67.0	65.0	67.0	70.3	67.2	69.7	74.1	68.2	71.1	77.3	-	-	-	-	203.4	
216.5	52.2	53.3	55.1	53.5	55.1	58.4	55.6	57.9	62.3	56.4	59.3	65.0	-	-	-	-	216.5	
229.7	42.3	43.4	45.2	43.7	45.2	47.8	45.6	47.6	51.4	46.3	48.9	53.8	-	-	-	-	229.7	
242.8	34.0	35.1	36.7	35.3	36.7	39.0	37.1	38.9	42.4	37.6	40.0	44.3	-	-	-	-	242.8	
255.9	26.6	27.4	28.7	27.6	28.7	30.9	29.1	30.9	34.0	29.5	31.7	35.8	-	-	-	-	255.9	
262.5	23.2	24.0	25.1	24.2	25.3	27.2	25.7	27.3	30.0	26.0	28.0	31.9	-	-	-	-	262.5	
269.0	19.8	20.5	-	20.7	21.8	23.6	22.3	23.8	26.5	22.5	24.5	28.0	-	-	-	-	269.0	
282.2	14.3	14.8	-	14.8	15.8	17.2	16.2	17.6	20.0	16.5	18.2	21.4	-	-	-	-	282.2	
288.7	11.5	11.9	-	11.9	12.8	-	13.2	14.6	16.8	13.4	15.0	18.1	-	-	-	-	288.7	
292.0	-	-	-	-	11.5	-	11.9	13.2	15.3	11.9	13.7	16.6	-	-	-	-	292.0	
295.3	-	-	-	-	-	-	-	11.9	13.9	-	12.3	15.2	-	-	-	-	295.3	
301.8	-	-	-	-	-	-	-	-	11.0	-	-	12.3	-	-	-	-	301.8	

 286,600 lb
  374,800 lb
  463,000 lb
  551,200 lb

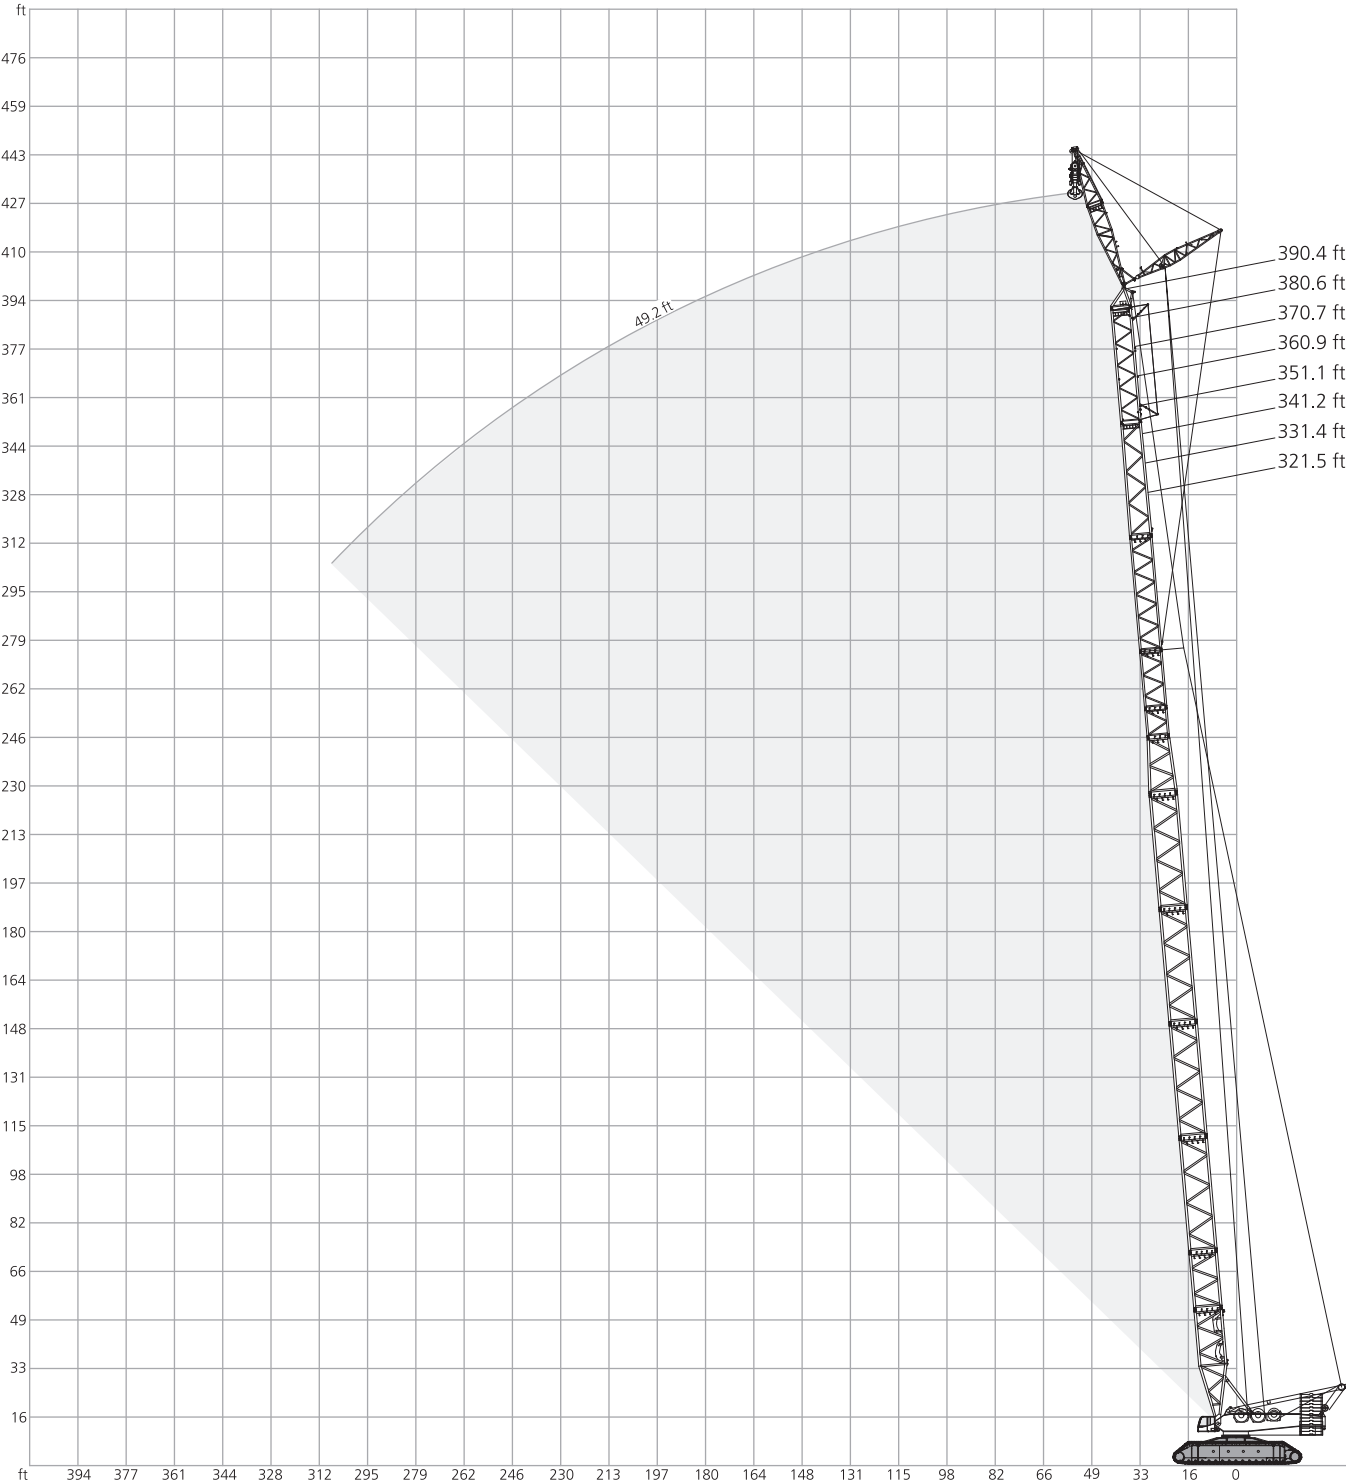

		49.2 – 68.9 ft				31.50 ft				32.2 ft/s				360°				75%	
		321.5 ft				331.4 ft				341.2 ft				351.1 ft					
		49.2 ft		68.9 ft		49.2 ft		68.9 ft		49.2 ft		68.9 ft		49.2 ft		68.9 ft			
		15°	20°	15°	20°	15°	20°	15°	20°	15°	20°	15°	20°	15°	20°	15°	20°		
ft		1,000 lb																ft	
52.5	385.8	-	-	-	-	370.4	-	-	-	357.1	-	-	-	339.5	-	-	-	52.5	
55.8	377.0	315.3	-	-	-	366.0	313.1	-	-	352.7	308.6	-	-	335.1	-	-	-	55.8	
59.1	368.2	308.6	269.0	-	-	361.6	308.6	269.0	-	346.1	308.6	269.0	-	330.7	302.0	260.1	-	59.1	
62.3	359.4	302.0	262.4	205.0	-	357.1	302.0	262.4	-	341.7	302.0	262.4	-	326.3	297.6	257.9	-	62.3	
65.6	352.7	295.4	255.7	205.0	350.5	295.4	255.7	202.8	335.1	297.6	257.9	205.0	321.9	293.2	253.5	202.8	65.6		
72.2	337.3	284.4	244.7	196.2	335.1	284.4	244.7	196.2	324.1	286.6	246.9	196.2	313.1	284.4	244.7	196.2	72.2		
78.7	321.9	273.4	233.7	189.6	317.5	273.4	233.7	189.6	310.9	275.6	235.9	189.6	302.0	275.6	235.9	189.6	78.7		
85.3	295.4	264.6	224.9	183.0	291.0	264.6	224.9	183.0	286.6	266.8	227.1	183.0	282.2	266.8	227.1	183.0	85.3		
91.9	271.2	253.5	216.1	176.4	266.8	253.5	216.1	176.4	262.4	255.7	218.3	176.4	257.9	253.5	218.3	176.4	91.9		
98.4	251.3	244.7	207.2	169.8	246.9	244.7	207.2	169.8	242.5	244.7	209.4	172.0	238.1	240.3	209.4	172.0	98.4		
111.5	213.8	218.3	191.8	158.7	211.6	213.8	191.8	158.7	207.2	211.6	194.0	160.9	205.0	207.2	196.2	160.9	111.5		
124.7	185.2	187.4	178.6	149.9	183.0	185.2	180.8	149.9	178.6	183.0	180.8	152.1	176.4	178.6	178.6	152.1	124.7		
137.8	163.1	165.3	163.1	142.2	158.7	160.9	160.9	142.2	156.5	158.7	158.7	143.3	153.2	155.4	155.4	143.3	137.8		
150.9	142.2	144.4	144.4	134.5	138.9	141.1	141.1	135.6	136.7	138.9	138.9	135.6	134.5	135.6	135.6	134.5	150.9		
164.0	123.5	124.6	126.8	125.7	121.3	122.4	124.6	125.7	119.0	121.3	122.4	124.6	116.8	117.9	117.9	121.3	164.0		
177.2	105.8	106.9	111.3	113.5	103.6	104.7	109.1	111.3	102.5	104.7	106.9	109.1	100.3	102.5	103.6	105.8	177.2		
190.3	90.4	92.6	95.9	98.1	88.2	90.4	93.7	95.9	88.2	89.3	92.6	94.8	86.0	87.1	90.4	92.6	190.3		
203.4	78.5	80.1	82.3	84.5	76.1	77.2	80.1	82.3	75.7	76.1	80.1	82.3	72.8	72.8	77.2	79.8	203.4		
216.5	66.1	68.3	70.5	72.8	63.9	66.1	68.3	70.5	63.9	63.9	68.3	70.5	61.7	61.7	66.1	68.3	216.5		
229.7	57.3	58.1	61.7	63.9	55.1	55.9	59.5	61.7	53.6	55.1	58.1	60.4	50.7	52.9	55.9	58.1	229.7		
242.8	48.5	50.0	52.9	55.1	47.0	48.5	50.7	52.9	44.8	47.0	50.0	50.7	42.6	44.8	48.5	48.5	242.8		
255.9	41.9	41.9	46.3	46.3	39.7	39.7	44.1	44.1	37.5	39.7	41.9	44.1	35.3	37.5	39.7	41.9	255.9		
269.0	34.5	36.0	38.9	40.4	32.3	33.8	36.7	38.2	31.6	32.3	36.0	36.7	28.7	30.4	33.8	34.5	269.0		
282.2	29.4	29.8	32.3	34.5	27.3	26.5	29.8	31.7	25.7	25.1	30.1	29.8	23.5	23.5	27.3	28.7	282.2		
295.3	24.3	24.3	26.5	28.7	22.0	22.0	24.3	26.5	19.8	19.8	24.3	24.3	17.6	17.6	22.0	22.0	295.3		
308.4	19.8	19.8	22.0	22.5	17.6	17.6	19.8	20.6	15.4	15.4	18.4	19.8	13.2	13.2	16.2	17.6	308.4		
315.0	17.6	17.6	19.8	19.8	15.4	15.4	17.6	17.6	13.2	13.2	15.4	17.6	11.0	11.0	13.2	15.4	315.0		
318.2	16.5	-	18.7	18.7	14.3	14.3	16.5	16.5	12.1	12.5	14.6	16.5	-	11.0	12.5	14.3	318.2		
321.5	15.4	-	17.6	17.6	13.2	13.2	15.4	15.4	11.0	11.8	13.7	15.4	-	-	11.8	13.2	321.5		
324.8	14.3	-	16.5	16.5	12.1	-	14.3	14.3	-	11.0	12.8	14.3	-	-	11.0	12.1	324.8		
328.1	13.2	-	15.4	15.4	11.0	-	13.2	13.2	-	-	11.9	13.2	-	-	-	11.0	328.1		
331.4	-	-	14.3	-	-	-	12.1	12.1	-	-	11.0	12.1	-	-	-	-	331.4		
334.6	-	-	13.2	-	-	-	11.0	11.0	-	-	-	11.0	-	-	-	-	334.6		
337.9	-	-	12.1	-	-	-	11.0	11.0	-	-	-	-	-	-	-	-	337.9		
341.2	-	-	11.0	-	-	-	-	-	-	-	-	-	-	-	-	-	341.2		


	286,600 lb	374,800 lb	463,000 lb	551,250 lb
---	------------	------------	------------	------------

 49.2 – 68.9 ft  31.50 ft  32.2 ft/s 360° 75%													
360.9 ft 370.7 ft 380.6 ft 390.4 ft													
49.2 ft 68.9 ft 49.2 ft 68.9 ft 49.2 ft													
15° 20° 15° 20° 15° 20° 15° 20° 15° 20° 15° 20°													
ft	1,000 lb												ft
55.8	317.5	-	-	-	302.0	-	-	-	291.0	-	277.8	-	55.8
59.1	313.1	299.8	-	-	295.4	291.0	-	-	284.4	273.4	271.2	-	59.1
62.3	308.6	295.4	260.1	-	291.0	286.6	253.5	-	280.0	273.4	266.8	257.9	62.3
65.6	304.2	291.0	255.7	205.0	284.4	284.4	249.1	-	273.4	269.0	262.4	253.5	65.6
68.9	299.8	287.7	252.4	202.8	280.0	281.1	246.9	205.0	269.0	265.7	257.9	251.3	68.9
72.2	295.4	284.4	249.1	200.6	275.6	277.8	244.7	200.6	264.6	262.4	253.5	249.1	72.2
78.7	288.8	277.8	242.5	194.0	266.8	269.0	238.1	196.2	255.7	255.7	244.7	242.5	78.7
85.3	277.8	269.0	235.9	187.4	257.9	260.1	233.7	189.6	249.1	249.1	238.1	238.1	85.3
91.9	255.7	260.1	229.3	183.0	246.9	251.3	227.1	183.0	238.1	242.5	229.3	231.5	91.9
98.4	235.9	238.1	220.5	176.4	231.5	233.7	220.5	178.6	227.1	231.5	218.3	224.9	98.4
111.5	202.8	205.0	202.8	167.6	198.4	200.6	198.4	167.6	194.0	198.4	191.8	194.0	111.5
124.7	174.2	176.4	176.4	156.5	169.8	174.2	172.0	158.7	167.6	169.8	165.3	167.6	124.7
137.8	152.1	154.3	153.2	148.8	148.8	151.0	149.9	148.8	146.6	148.8	142.2	144.4	137.8
150.9	132.3	134.5	134.5	135.6	130.1	131.2	130.1	134.5	127.9	129.0	123.5	125.7	150.9
164.0	115.7	117.9	117.9	120.2	113.5	113.5	114.6	117.9	111.3	111.3	106.9	109.1	164.0
177.2	100.3	101.4	103.6	105.8	98.1	98.1	101.4	103.6	95.9	97.0	92.6	94.8	177.2
190.3	84.9	86.0	90.4	92.6	82.7	83.8	88.2	90.4	80.8	83.8	79.4	81.6	190.3
203.4	72.3	72.8	77.2	79.8	69.8	71.9	75.7	77.2	69.1	71.3	66.9	69.1	203.4
216.5	61.7	61.7	66.1	68.3	59.5	59.5	63.9	66.1	57.3	59.5	55.1	57.3	216.5
229.7	50.7	52.9	55.9	58.1	48.5	50.7	53.4	55.9	48.5	48.5	46.3	46.3	229.7
242.8	42.6	44.1	46.7	48.5	40.4	41.9	44.8	47.0	39.7	40.4	37.5	38.2	242.8
255.9	35.3	35.3	39.7	39.7	33.1	33.1	37.5	39.7	30.9	33.1	28.7	30.9	255.9
269.0	28.7	28.7	32.3	33.8	25.4	27.2	30.4	32.3	25.6	25.4	22.8	23.5	269.0
282.2	23.5	23.5	26.9	26.5	19.8	21.3	23.5	25.7	19.1	19.1	16.9	16.9	282.2
295.3	17.6	17.6	19.8	22.0	15.4	15.4	17.6	19.8	13.2	13.2	11.0	11.0	295.3
298.6	16.5	16.5	18.7	20.6	14.0	14.3	16.5	18.4	12.1	12.5	-	11.0	298.6
301.8	15.4	15.4	17.6	19.1	12.5	13.2	15.4	16.9	11.0	11.8	-	-	301.8
305.1	14.3	14.3	16.5	17.6	11.0	12.1	14.3	15.4	-	11.0	-	-	305.1
308.4	13.2	13.2	15.4	16.2	-	11.0	13.2	14.0	-	-	-	-	308.4
315.0	11.0	11.0	13.2	13.2	-	-	11.0	11.0	-	-	-	-	315.0
318.2	-	-	12.5	12.5	-	-	11.0	11.0	-	-	-	-	318.2
321.5	-	-	11.8	11.8	-	-	-	-	-	-	-	-	321.5
324.8	-	-	11.0	11.0	-	-	-	-	-	-	-	-	324.8


 286,600 lb
 
 374,800 lb
 
 463,000 lb
 
 551,250 lb

SSL+LF, SSL/LSL+LF, SSL/LSL S1+LF

CC 6800-1

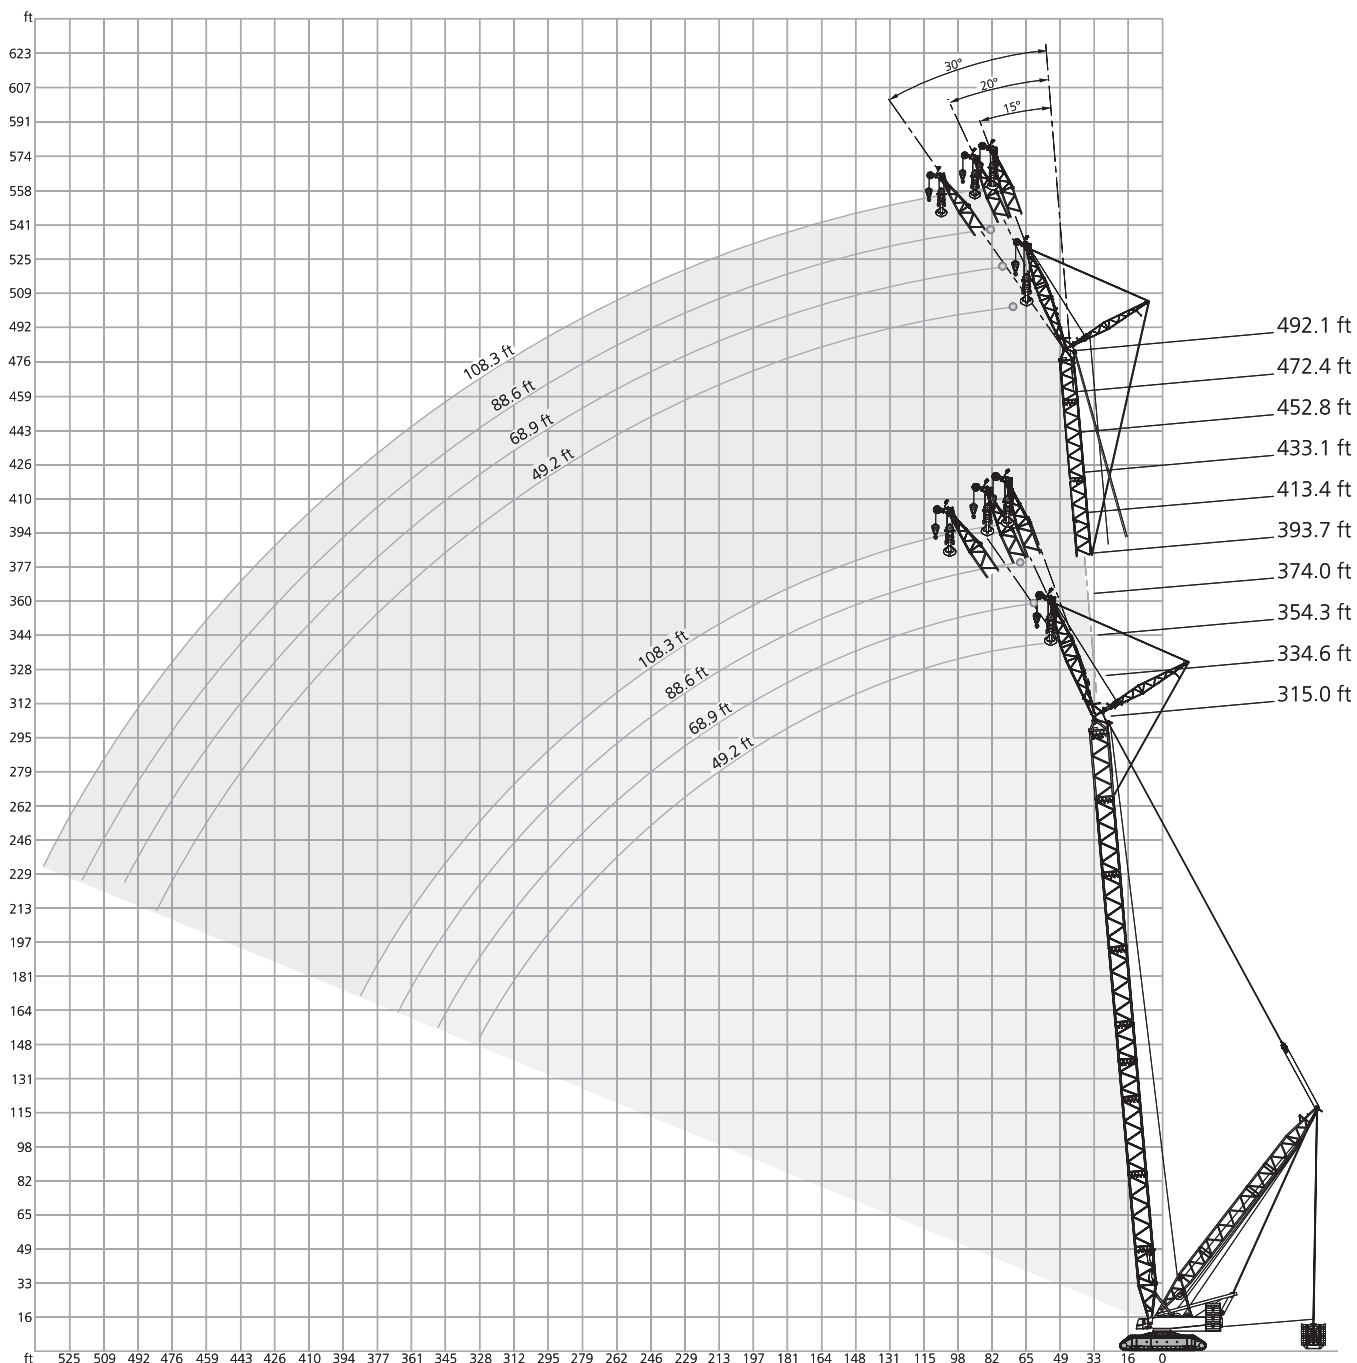

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%																	
216.5 ft																	
49.2 ft			68.9 ft			88.6 ft			108.3 ft								
0 lb			0 - 992,100 lb			0 lb			0 - 992,100 lb			0 lb			0 - 992,100 lb		
15°			20°			30°			15°			20°			30°		
ft			1,000 lb												ft		
45.9	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	45.9
49.2	551.2	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	49.2
52.5	551.2	551.2	551.2	-	520.3	526.9	-	-	-	-	-	-	-	-	-	-	52.5
55.8	551.2	551.2	551.2	352.7	520.3	526.9	-	-	-	-	-	-	-	-	-	-	55.8
59.1	551.2	551.2	544.5	352.7	507.1	513.7	412.3	-	394.6	410.1	-	-	-	-	-	-	59.1
65.6	511.5	551.2	524.7	343.9	478.4	485.0	394.6	-	394.6	399.0	313.1	-	315.3	326.3	-	-	65.6
68.9	486.1	551.2	512.6	339.5	466.3	472.9	385.8	249.1	383.6	388.0	309.7	-	315.3	321.9	-	-	68.9
72.2	460.8	551.2	500.4	335.1	454.2	460.8	377.0	249.1	372.6	377.0	306.4	-	315.3	317.5	-	-	72.2
75.5	438.7	551.2	490.5	330.7	434.3	449.7	369.3	244.7	363.8	368.2	299.8	-	307.5	309.7	244.7	-	75.5
78.7	416.7	551.2	480.6	326.3	414.5	438.7	361.6	240.3	354.9	359.4	293.2	189.6	299.8	302.0	244.7	-	78.7
85.3	374.8	549.0	463.0	317.5	377.0	416.7	346.1	233.7	339.5	341.7	280.0	186.3	284.4	286.6	233.7	-	85.3
91.9	335.1	542.3	445.3	308.6	341.7	399.0	332.9	227.1	324.1	326.3	269.0	180.8	271.2	273.4	224.9	146.6	91.9
98.4	313.1	520.3	429.9	302.0	306.4	383.6	321.9	220.5	308.6	313.1	257.9	175.3	260.1	262.4	216.1	144.4	98.4
111.5	255.7	478.4	401.2	286.6	260.1	352.7	299.8	209.4	257.9	286.6	238.1	166.4	238.1	240.3	198.4	135.6	111.5
124.7	212.7	443.1	377.0	273.4	218.3	328.5	280.0	198.4	222.7	264.6	220.5	156.5	220.5	220.5	184.1	126.8	124.7
137.8	178.6	414.5	356.0	261.2	183.5	305.3	262.4	190.1	188.5	244.7	207.2	148.3	191.3	203.9	171.4	120.2	137.8
150.9	150.5	390.2	337.3	251.3	154.9	286.6	246.9	182.4	159.8	228.2	194.6	141.1	162.0	189.6	160.4	113.5	150.9
164.0	127.3	369.3	321.9	243.6	131.2	269.0	233.7	175.3	135.6	213.3	183.5	135.0	137.8	176.9	150.5	107.9	164.0
177.2	107.8	349.4	307.5	237.0	111.2	253.5	221.6	168.7	115.5	200.6	173.6	129.5	117.7	165.3	141.6	103.3	177.2
190.3	90.9	331.8	294.3	230.4	94.5	240.3	211.1	162.6	98.5	189.6	164.8	124.6	100.6	155.4	134.5	98.9	190.3
203.4	76.4	316.4	283.3	225.6	79.8	228.2	202.3	157.6	83.7	179.7	157.6	120.2	85.6	147.2	127.9	95.0	203.4
206.7	73.0	312.5	280.5	224.9	76.4	225.4	200.3	156.5	80.2	177.5	156.0	119.0	82.2	145.2	126.2	94.1	206.7
216.5	63.8	303.1	273.4	-	67.0	217.7	194.6	153.8	70.7	170.9	151.0	116.3	72.5	139.4	121.8	91.6	216.5
226.4	55.4	294.9	266.8	-	58.4	210.8	189.3	151.0	61.9	164.8	146.3	113.8	63.7	134.2	117.9	89.3	226.4
229.7	52.8	292.1	264.6	-	55.8	208.9	187.9	-	59.3	163.1	145.0	113.0	61.0	132.8	116.8	88.6	229.7
232.9	50.2	289.4	262.4	-	53.1	207.0	186.6	-	56.7	161.5	143.6	112.2	58.3	131.5	115.7	88.0	232.9
242.8	43.0	282.2	-	-	45.9	201.2	182.4	-	49.3	156.5	140.0	110.6	50.8	127.3	112.4	86.2	242.8
246.1	-	-	-	-	43.5	199.2	181.1	-	46.9	154.9	138.9	110.2	48.4	125.9	111.3	85.6	246.1
252.6	-	-	-	-	39.2	195.9	178.6	-	42.4	151.8	136.7	-	44.0	123.2	109.3	84.7	252.6
255.9	-	-	-	-	37.1	194.6	-	-	40.3	150.5	135.6	-	41.9	121.8	108.5	84.2	255.9
262.5	-	-	-	-	33.1	191.8	-	-	36.2	147.7	133.4	-	37.7	119.0	106.7	83.3	262.5
265.7	-	-	-	-	-	-	-	-	34.3	146.6	132.6	-	35.8	117.9	105.9	82.9	265.7
269.0	-	-	-	-	-	-	-	-	32.4	145.5	131.9	-	33.8	116.8	105.2	-	269.0
272.3	-	-	-	-	-	-	-	-	30.5	144.4	131.2	-	31.9	115.7	104.4	-	272.3
282.2	-	-	-	-	-	-	-	-	25.1	142.2	-	-	26.6	113.0	102.4	-	282.2
288.7	-	-	-	-	-	-	-	-	-	-	-	-	23.1	111.3	101.2	-	288.7
295.3	-	-	-	-	-	-	-	-	-	-	-	-	20.1	110.5	-	-	295.3
298.6	-	-	-	-	-	-	-	-	-	-	-	-	18.5	110.0	-	-	298.6
0 lb 176,400 lb 352,800 lb 529,200 lb 705,600 lb 882,000 lb 992,100 lb																	

551,200 lb + 176,400 lb49.2-108.3 ft49.2-78.7 ft31.50 ft32.2 ft/s360°75%																			
236.2 ft																			
49.2 ft			68.9 ft			88.6 ft			108.3 ft										
0 lb		0 - 992,100 lb		0 lb		0 - 992,100 lb		0 lb		0 - 992,100 lb		0 lb		0 - 992,100 lb					
15°		20°		30°		15°		20°		30°		15°		20°		30°			
ft		1,000 lb																ft	
45.9	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	45.9		
52.5	551.2	551.2	551.2	-	511.5	535.7	-	-	-	-	-	-	-	-	-	-	52.5		
59.1	551.2	551.2	549.0	348.3	511.5	520.3	407.9	-	399.0	403.4	-	-	-	-	-	-	59.1		
65.6	493.8	551.2	533.5	343.9	485.0	491.6	399.0	-	399.0	403.4	-	-	317.5	321.9	-	-	65.6		
68.9	468.5	551.2	522.5	340.6	463.0	480.6	390.2	249.1	389.1	393.5	308.6	-	317.5	321.9	-	-	68.9		
72.2	443.1	551.2	511.5	337.3	440.9	469.6	381.4	249.1	379.2	383.6	308.6	-	317.5	321.9	-	-	72.2		
75.5	422.2	551.2	501.6	332.9	420.0	458.6	373.7	245.8	370.4	374.8	302.0	-	309.7	314.2	242.5	-	75.5		
78.7	401.2	551.2	491.6	328.5	399.0	447.5	366.0	242.5	361.6	366.0	295.4	-	302.0	306.4	242.5	-	78.7		
82.0	382.5	550.1	481.7	325.2	381.4	437.6	359.4	239.2	352.7	357.1	289.9	188.5	295.4	298.7	239.2	-	82.0		
85.3	363.8	549.0	471.8	321.9	363.8	427.7	352.7	235.9	343.9	348.3	284.4	188.5	288.8	291.0	235.9	-	85.3		
91.9	326.3	546.7	456.4	313.1	332.9	410.1	339.5	229.3	330.7	332.9	273.4	183.0	275.6	280.0	227.1	145.5	91.9		
98.4	304.2	535.7	440.9	306.4	299.8	392.4	328.5	222.7	306.4	319.7	264.6	177.5	264.6	266.8	219.4	145.5	98.4		
111.5	249.1	496.0	412.3	291.0	253.5	363.8	306.4	212.7	249.1	295.4	244.7	168.7	244.7	246.9	202.8	136.7	111.5		
124.7	205.0	460.8	388.0	277.8	210.5	339.5	288.8	202.8	216.1	273.4	227.1	159.8	210.5	227.1	188.5	129.0	124.7		
137.8	170.9	431.0	367.1	267.9	175.8	316.4	270.1	193.5	181.3	253.5	213.3	151.6	184.6	210.5	175.8	121.3	137.8		
150.9	142.7	404.5	348.3	257.9	147.2	296.5	254.6	185.7	152.1	235.9	200.6	144.4	155.4	195.7	164.8	115.2	150.9		
164.0	119.5	383.6	331.8	249.1	123.5	278.9	240.3	178.6	127.9	221.0	189.6	137.8	131.2	182.4	154.9	110.0	164.0		
177.2	99.8	364.9	317.5	241.4	103.5	263.5	228.2	172.5	107.9	208.9	179.7	131.7	110.8	171.4	146.1	105.2	177.2		
190.3	82.9	346.1	305.3	234.8	86.6	249.1	218.3	166.4	90.9	197.3	170.9	126.8	93.4	161.5	138.3	100.6	190.3		
203.4	68.3	329.6	294.3	229.3	71.9	237.0	209.4	160.9	75.9	186.8	162.6	122.4	78.3	152.7	131.7	96.8	203.4		
216.5	55.7	315.3	283.3	224.9	59.1	227.1	201.2	156.5	62.9	177.5	155.4	118.5	65.0	145.0	125.7	93.4	216.5		
223.1	49.8	308.6	277.8	222.7	53.1	222.7	197.3	154.3	56.9	173.1	152.1	116.8	58.9	141.1	122.4	91.7	223.1		
229.7	44.6	303.1	273.4	-	47.8	217.7	194.0	152.7	51.5	169.8	149.4	115.2	53.5	137.8	120.2	90.3	229.7		
242.8	34.8	292.1	265.7	-	37.8	208.9	187.9	149.9	41.3	163.1	144.4	112.4	43.2	131.7	115.7	87.6	242.8		
249.3	30.2	286.6	262.4	-	33.1	205.0	185.2	-	36.6	159.8	142.2	111.3	38.4	129.0	113.5	86.4	249.3		
255.9	26.1	273.4	-	-	29.0	201.7	182.4	-	32.4	156.5	140.0	110.3	34.1	126.2	111.7	85.4	255.9		
259.2	24.0	266.8	-	-	27.0	200.1	181.1	-	30.3	154.9	138.9	109.8	31.9	124.8	110.7	84.9	259.2		
269.0	-	-	-	-	21.2	195.7	178.6	-	24.4	151.0	135.6	-	26.0	121.3	108.0	83.6	269.0		
278.9	-	-	-	-	15.7	191.8	-	-	18.8	147.7	132.6	-	20.5	118.2	105.5	82.5	278.9		
282.2	-	-	-	-	-	-	-	-	17.2	146.6	131.9	-	18.7	117.4	104.8	-	282.2		
285.4	-	-	-	-	-	-	-	-	15.5	145.5	131.2	-	17.0	116.6	104.1	-	285.4		
292.0	-	-	-	-	-	-	-	-	12.3	143.7	-	-	13.7	114.6	102.8	-	292.0		
295.3	-	-	-	-	-	-	-	-	-	142.9	-	-	12.1	113.5	102.3	-	295.3		
298.6	-	-	-	-	-	-	-	-	-	142.2	-	-	-	112.4	101.7	-	298.6		
305.1	-	-	-	-	-	-	-	-	-	-	-	-	-	110.9	100.8	-	305.1		
308.4	-	-	-	-	-	-	-	-	-	-	-	-	-	110.5	-	-	308.4		
318.2	-	-	-	-	-	-	-	-	-	-	-	-	-	109.1	-	-	318.2		

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%																	
255.9 ft																	
49.2 ft 68.9 ft 88.6 ft 108.3 ft																	
0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb																	
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°																	
ft 1,000 lb ft																	
49.2	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	49.2
52.5	551.2	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	52.5
55.8	551.2	551.2	551.2	-	504.9	524.7	-	-	-	-	-	-	-	-	-	-	55.8
59.1	533.5	551.2	551.2	348.3	504.9	524.7	-	-	-	-	-	-	-	-	-	-	59.1
62.3	502.7	551.2	546.7	348.3	498.2	511.5	401.2	-	392.4	407.9	-	-	-	-	-	-	62.3
65.6	476.2	551.2	537.9	346.1	471.8	498.2	401.2	-	392.4	407.9	-	-	-	-	-	-	65.6
68.9	451.9	551.2	528.0	341.7	448.6	488.3	393.5	-	388.0	397.9	310.9	-	313.1	324.1	-	-	68.9
72.2	427.7	551.2	518.1	337.3	425.5	478.4	385.8	246.9	383.6	388.0	310.9	-	313.1	324.1	-	-	72.2
78.7	385.8	551.2	498.2	330.7	385.8	456.4	372.6	244.7	366.0	370.4	299.8	-	306.4	308.6	242.5	-	78.7
82.0	368.2	551.2	489.4	327.4	368.2	446.4	364.9	241.4	358.3	362.7	293.2	186.3	299.8	302.0	240.3	-	82.0
85.3	350.5	551.2	480.6	324.1	350.5	436.5	357.1	238.1	350.5	354.9	286.6	186.3	293.2	295.4	238.1	-	85.3
91.9	319.7	546.7	465.2	317.5	319.7	416.7	346.1	231.5	321.9	339.5	277.8	184.1	280.0	282.2	229.3	-	91.9
95.1	303.1	544.5	457.5	314.2	306.4	409.0	339.5	228.2	308.6	332.9	272.3	181.3	274.5	276.7	226.0	145.5	95.1
98.4	286.6	542.3	449.7	310.9	293.2	401.2	332.9	224.9	295.4	326.3	266.8	178.6	269.0	271.2	222.7	145.5	98.4
111.5	242.5	509.3	423.3	295.4	238.1	372.6	313.1	215.0	244.7	302.0	249.1	169.8	249.1	251.3	206.1	137.8	111.5
124.7	198.4	474.0	399.0	284.4	203.9	348.3	295.4	205.0	210.5	280.0	233.7	162.0	205.0	233.7	191.8	130.1	124.7
137.8	164.8	442.0	377.0	272.3	169.8	326.3	277.8	196.8	175.8	261.2	218.3	153.8	175.3	216.6	179.7	123.5	137.8
150.9	136.1	416.7	357.1	262.4	141.1	306.4	262.4	189.0	146.6	243.6	205.6	146.6	149.4	201.7	168.7	116.8	150.9
164.0	112.9	394.6	340.6	253.5	117.2	289.9	249.1	181.9	122.4	229.3	194.6	140.0	124.6	189.0	158.7	111.3	164.0
177.2	93.1	377.0	326.3	245.8	97.2	274.5	237.0	175.8	102.0	216.1	184.6	133.9	104.4	177.5	149.9	106.8	177.2
190.3	76.2	361.6	314.2	239.2	80.0	260.1	226.0	170.3	84.5	203.9	175.8	129.0	87.1	167.0	142.2	102.4	190.3
203.4	61.5	345.0	303.1	233.7	65.3	246.9	216.1	164.8	69.4	193.5	168.1	124.6	71.9	158.2	135.6	98.4	203.4
216.5	48.8	329.6	292.1	228.2	52.4	235.9	207.8	159.8	56.3	184.1	160.9	120.7	58.6	150.5	129.5	94.9	216.5
229.7	37.7	316.4	282.2	223.8	41.0	226.0	200.1	156.0	44.9	175.8	154.3	117.4	47.0	143.3	124.0	91.8	229.7
236.2	32.4	310.9	277.8	222.7	35.7	220.5	196.2	154.3	39.5	172.0	151.0	115.7	41.4	140.0	121.3	90.4	236.2
242.8	27.9	303.1	273.4	-	31.0	216.6	193.5	152.7	34.7	168.7	148.3	114.1	36.6	136.7	119.0	89.1	242.8
255.9	19.2	278.9	265.7	-	22.0	209.4	187.9	149.9	25.7	162.0	143.3	111.3	27.4	130.6	114.6	86.6	255.9
265.7	13.1	255.7	255.7	-	15.9	204.5	184.1	-	19.5	157.6	140.3	109.9	21.2	126.8	111.6	85.0	265.7
269.0	11.2	251.3	-	-	14.0	202.8	183.0	-	17.5	156.5	139.4	109.6	19.3	125.7	110.8	84.5	269.0
272.3	-	246.9	-	-	12.1	201.2	181.9	-	15.6	154.9	138.6	109.2	17.4	124.6	110.0	84.1	272.3
275.6	-	242.5	-	-	-	199.5	180.8	-	13.7	153.2	137.8	108.9	15.4	123.5	109.1	83.6	275.6
278.9	-	-	-	-	-	198.1	179.7	-	11.9	152.1	136.7	-	13.7	122.4	108.4	83.2	278.9
282.2	-	-	-	-	-	196.8	178.6	-	-	151.0	135.6	-	11.9	121.3	107.6	82.9	282.2
285.4	-	-	-	-	-	195.4	177.5	-	-	149.9	134.5	-	-	120.2	106.8	82.6	285.4
292.0	-	-	-	-	-	192.9	-	-	-	147.7	132.8	-	-	118.2	105.3	81.8	292.0
295.3	-	-	-	-	-	191.8	-	-	-	146.6	132.3	-	-	117.4	104.6	-	295.3
301.8	-	-	-	-	-	-	-	-	-	144.4	131.2	-	-	115.7	103.2	-	301.8
308.4	-	-	-	-	-	-	-	-	-	142.7	-	-	-	114.1	102.1	-	308.4
315.0	-	-	-	-	-	-	-	-	-	141.1	-	-	-	112.4	101.0	-	315.0
321.5	-	-	-	-	-	-	-	-	-	-	-	-	-	111.1	100.1	-	321.5
334.6	-	-	-	-	-	-	-	-	-	-	-	-	-	108.7	-	-	334.6

0 lb

176,400 lb

352,800 lb

529,200 lb

705,600 lb

882,000 lb

992,100 lb

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%																	
275.6 ft																	
49.2 ft			68.9 ft			88.6 ft			108.3 ft								
0 lb		0 - 992,100 lb		0 lb		0 - 992,100 lb		0 lb		0 - 992,100 lb		0 lb		0 - 992,100 lb			
15°		20°		30°		15°		20°		30°		15°		20°		30°	
ft	1,000 lb																ft
49.2	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	49.2
52.5	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	52.5
55.8	544.5	551.2	551.2	-	509.3	529.1	-	-	-	-	-	-	-	-	-	-	55.8
59.1	513.7	551.2	551.2	-	507.1	529.1	-	-	-	-	-	-	-	-	-	-	59.1
62.3	485.0	551.2	551.2	346.1	480.6	515.9	405.7	-	388.0	401.2	-	-	-	-	-	-	62.3
65.6	458.6	551.2	542.3	346.1	454.2	504.9	405.7	-	388.0	401.2	-	-	-	-	-	-	65.6
72.2	410.1	551.2	524.7	339.5	410.1	482.8	390.2	249.1	388.0	392.4	306.4	-	308.6	319.7	-	-	72.2
78.7	370.4	551.2	504.9	332.9	370.4	463.0	377.0	244.7	370.4	374.8	302.0	-	308.6	313.1	240.3	-	78.7
85.3	337.3	551.2	489.4	326.3	337.3	445.3	363.8	238.1	337.3	359.4	291.0	187.4	295.4	299.8	240.3	-	85.3
91.9	306.4	551.2	474.0	319.7	308.6	427.7	350.5	233.7	308.6	346.1	280.0	185.2	284.4	286.6	231.5	-	91.9
95.1	293.2	547.8	467.4	316.4	295.4	418.9	345.0	230.4	295.4	339.5	275.6	182.4	278.9	281.1	228.2	144.4	95.1
98.4	280.0	544.5	460.8	313.1	282.2	410.1	339.5	227.1	282.2	332.9	271.2	179.7	273.4	275.6	224.9	144.4	98.4
111.5	233.7	522.5	432.1	299.8	231.5	381.4	319.7	217.2	238.1	308.6	253.5	172.0	240.3	255.7	209.4	138.9	111.5
124.7	190.7	489.4	407.9	288.8	197.3	357.1	302.0	208.3	194.0	288.8	238.1	163.1	198.4	238.1	195.1	131.2	124.7
137.8	157.1	459.7	386.9	277.8	162.6	336.2	285.5	200.1	168.1	269.0	223.2	156.0	168.7	222.1	183.5	124.6	137.8
150.9	128.4	432.1	368.2	267.9	133.4	316.4	270.1	192.4	138.9	251.3	211.1	148.8	142.7	207.8	172.5	118.5	150.9
164.0	105.1	409.0	350.5	257.9	109.6	297.6	255.7	185.2	114.8	235.9	199.5	142.2	118.1	194.6	162.6	113.0	164.0
177.2	85.2	389.1	335.1	250.2	89.6	282.2	243.6	179.1	94.5	223.2	189.6	136.1	97.6	183.0	153.8	108.1	177.2
190.3	68.2	372.6	323.0	243.6	72.3	269.0	232.6	173.6	76.9	211.1	180.8	131.2	79.8	172.5	146.1	103.9	190.3
203.4	53.6	358.3	312.0	237.0	57.4	255.7	222.7	168.1	61.8	200.1	172.5	126.8	64.5	163.1	138.9	100.0	203.4
216.5	40.8	342.8	300.9	231.5	44.4	243.6	214.4	163.1	48.7	190.7	165.3	122.9	51.1	154.9	132.8	96.5	216.5
229.7	29.5	328.5	291.0	227.1	33.1	233.7	206.7	158.7	37.1	182.4	158.7	119.6	39.5	147.7	127.3	93.3	229.7
242.8	19.6	314.2	282.2	223.8	23.0	224.9	199.5	154.9	26.9	174.7	152.7	116.3	29.1	141.1	122.4	90.4	242.8
249.3	15.0	306.4	277.8	222.7	18.3	220.5	196.2	153.2	22.0	170.9	149.9	114.6	24.3	137.8	120.2	89.1	249.3
252.6	12.8	297.6	274.5	-	16.2	218.8	194.7	152.7	19.9	169.4	148.8	114.1	22.0	136.4	119.0	88.5	252.6
255.9	-	289.5	271.2	-	14.0	217.2	193.3	152.1	17.7	167.9	147.7	113.5	19.8	135.0	117.9	87.9	255.9
259.2	-	281.5	269.0	-	11.9	215.0	191.8	151.0	15.6	166.4	146.6	113.0	17.6	133.7	116.8	87.2	259.2
265.7	-	265.7	261.2	-	-	211.1	188.5	149.9	11.5	163.1	144.4	111.7	13.4	131.2	114.6	86.1	265.7
269.0	-	257.9	255.7	-	-	209.4	187.4	148.8	-	161.7	143.3	111.0	11.5	130.1	113.5	85.6	269.0
282.2	-	228.2	229.3	-	-	202.8	183.0	-	-	156.0	138.9	109.3	-	124.6	110.0	83.8	282.2
288.7	-	220.5	-	-	-	199.5	180.8	-	-	153.2	136.7	108.5	-	122.4	108.7	82.9	288.7
295.3	-	212.7	-	-	-	197.3	178.6	-	-	151.0	135.0	-	-	120.7	107.1	82.2	295.3
298.6	-	-	-	-	-	196.2	177.5	-	-	149.9	134.2	-	-	119.9	106.4	81.9	298.6
308.4	-	-	-	-	-	192.9	-	-	-	147.2	132.3	-	-	116.8	104.3	81.1	308.4
311.7	-	-	-	-	-	191.8	-	-	-	146.3	131.7	-	-	115.7	103.6	-	311.7
318.2	-	-	-	-	-	-	-	-	-	144.7	130.1	-	-	114.1	102.5	-	318.2
321.5	-	-	-	-	-	-	-	-	-	143.9	-	-	-	113.5	102.0	-	321.5
331.4	-	-	-	-	-	-	-	-	-	141.1	-	-	-	111.8	100.5	-	331.4
334.6	-	-	-	-	-	-	-	-	-	-	-	-	-	111.2	100.1	-	334.6
337.9	-	-	-	-	-	-	-	-	-	-	-	-	-	110.6	99.6	-	337.9
347.8	-	-	-	-	-	-	-	-	-	-	-	-	-	109.0	-	-	347.8
351.1	-	-	-	-	-	-	-	-	-	-	-	-	-	108.5	-	-	351.1

0 lb

176,400 lb

352,800 lb

529,200 lb

705,600 lb

882,000 lb

992,100 lb

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
---	------	------------	------------	------------	------------	------------	------------

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%																	
295.3 ft																	
49.2 ft			68.9 ft			88.6 ft			108.3 ft								
0 lb		0 - 992,100 lb		0 lb		0 - 992,100 lb		0 lb		0 - 992,100 lb		0 lb		0 - 992,100 lb			
15°		20°		30°		15°		20°		30°		15°		20°		30°	
ft	1,000 lb																ft
52.5	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	52.5
55.8	524.7	551.2	549.0	-	-	-	-	-	-	-	-	-	-	-	-	-	55.8
59.1	493.8	551.2	549.0	-	491.6	520.3	-	-	-	-	-	-	-	-	-	-	59.1
62.3	465.2	551.2	549.0	346.1	463.0	520.3	-	-	-	-	-	-	-	-	-	-	62.3
65.6	440.9	551.2	549.0	346.1	438.7	509.3	401.2	-	390.2	403.4	-	-	-	-	-	-	65.6
72.2	394.6	551.2	529.1	339.5	394.6	487.2	392.4	-	390.2	394.6	308.6	-	310.9	315.3	-	-	72.2
75.5	375.9	551.2	520.3	336.2	375.9	478.4	385.8	246.9	373.7	386.9	306.4	-	310.9	315.3	-	-	75.5
78.7	357.1	551.2	511.5	332.9	357.1	469.6	379.2	246.9	357.1	379.2	304.2	-	310.9	315.3	-	-	78.7
82.0	340.6	551.2	503.8	329.6	340.6	460.8	373.7	243.6	341.7	371.5	298.7	-	304.2	308.6	242.5	-	82.0
85.3	324.1	551.2	496.0	326.3	324.1	451.9	368.2	240.3	326.3	363.8	293.2	186.3	297.6	302.0	242.5	-	85.3
91.9	295.4	551.2	478.4	321.9	295.4	434.3	354.9	235.9	297.6	350.5	284.4	186.3	286.6	291.0	233.7	-	91.9
98.4	269.0	549.0	465.2	315.3	271.2	416.7	343.9	229.3	273.4	337.3	275.6	180.8	273.4	280.0	227.1	145.5	98.4
111.5	218.3	533.5	438.7	304.2	224.9	390.2	324.1	219.4	231.5	315.3	257.9	173.1	231.5	260.1	212.7	140.0	111.5
124.7	184.1	500.4	416.7	293.2	190.7	366.0	306.4	210.5	188.5	293.2	242.5	165.3	192.9	242.5	198.4	132.3	124.7
137.8	150.5	471.8	395.7	282.2	156.0	343.9	291.0	202.3	157.6	275.6	228.2	157.6	162.0	228.2	186.8	125.7	137.8
150.9	121.8	445.3	375.9	272.3	126.8	324.1	276.7	195.1	132.3	259.0	215.0	151.0	136.7	213.3	175.8	119.6	150.9
164.0	98.3	421.1	358.3	262.4	103.0	306.4	262.4	188.5	108.2	243.6	204.5	144.4	112.2	200.1	165.9	114.1	164.0
177.2	78.4	400.1	343.9	254.6	83.0	291.0	250.2	182.4	88.0	229.3	194.6	138.3	91.4	188.5	157.1	109.5	177.2
190.3	61.3	382.5	330.7	248.0	65.6	277.8	239.2	176.4	70.3	217.2	185.2	133.4	73.5	178.0	149.4	105.5	190.3
203.4	46.5	368.2	319.7	241.4	50.6	264.6	229.3	170.9	55.1	206.7	176.9	129.0	58.1	168.7	142.2	101.4	203.4
216.5	33.7	354.9	310.9	235.9	37.6	252.4	220.5	165.9	41.9	197.3	169.8	124.6	44.6	160.4	136.1	97.8	216.5
229.7	22.5	338.4	300.9	231.5	26.1	242.5	212.2	160.9	30.3	188.5	163.1	120.7	32.8	152.7	130.6	94.6	229.7
242.8	12.6	315.3	291.0	227.8	16.0	233.0	205.0	157.3	20.1	180.4	157.1	117.4	22.5	145.5	125.1	91.7	242.8
249.3	-	304.2	286.6	224.9	11.2	227.1	201.7	155.4	15.2	176.4	154.3	115.7	17.6	142.2	122.4	90.4	249.3
252.6	-	298.2	284.4	224.3	-	225.4	200.1	154.9	13.0	175.3	153.2	115.4	15.3	141.1	121.3	89.8	252.6
255.9	-	292.1	282.2	223.8	-	223.8	198.4	154.3	-	173.4	151.8	115.0	13.0	139.6	120.2	89.2	255.9
262.5	-	280.0	277.8	222.7	-	220.5	195.1	152.1	-	169.8	148.8	113.5	-	136.7	117.9	88.0	262.5
269.0	-	265.7	265.7	-	-	216.6	192.4	151.0	-	167.0	146.6	112.4	-	133.9	116.3	86.9	269.0
282.2	-	238.1	239.2	-	-	209.4	187.4	148.8	-	161.5	142.2	110.5	-	129.0	112.4	84.8	282.2
295.3	-	211.6	212.4	-	-	203.4	183.0	-	-	156.0	138.3	108.8	-	124.6	109.1	83.0	295.3
298.6	-	205.0	206.1	-	-	202.0	181.9	-	-	154.6	137.5	108.4	-	123.5	108.6	82.6	298.6
301.8	-	200.6	-	-	-	200.6	180.8	-	-	153.2	136.7	108.0	-	122.4	108.0	82.2	301.8
308.4	-	194.0	-	-	-	195.1	179.1	-	-	151.0	135.2	-	-	120.2	106.6	81.7	308.4
311.7	-	190.7	-	-	-	192.4	178.3	-	-	149.9	134.5	-	-	119.0	105.9	81.4	311.7
315.0	-	-	-	-	-	189.6	177.5	-	-	148.8	133.4	-	-	117.9	105.2	81.1	315.0
321.5	-	-	-	-	-	183.0	-	-	-	147.2	132.6	-	-	116.8	103.9	80.5	321.5
331.4	-	-	-	-	-	172.0	-	-	-	144.7	130.6	-	-	114.1	102.2	-	331.4
334.6	-	-	-	-	-	-	-	-	-	143.9	130.1	-	-	113.5	101.7	-	334.6
347.8	-	-	-	-	-	-	-	-	-	141.1	-	-	-	111.2	100.0	-	347.8
354.3	-	-	-	-	-	-	-	-	-	-	-	-	-	110.0	99.2	-	354.3
360.9	-	-	-	-	-	-	-	-	-	-	-	-	-	109.0	-	-	360.9
367.5	-	-	-	-	-	-	-	-	-	-	-	-	-	108.0	-	-	367.5

0 lb

176,400 lb

352,800 lb

529,200 lb

705,600 lb

882,000 lb

992,100 lb

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%																
315.0 ft 49.2 ft 68.9 ft 88.6 ft 108.3 ft																
0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb																
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°																
ft	1,000 lb															ft
52.5	535.7	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	52.5
59.1	474.0	551.2	549.0	-	471.8	511.5	-	-	-	-	-	-	-	-	-	59.1
65.6	423.3	551.2	546.7	343.9	423.3	511.5	403.4	-	-	-	-	-	-	-	-	65.6
68.9	401.2	551.2	540.1	342.8	401.2	501.6	400.1	-	-	-	-	-	-	-	-	68.9
72.2	379.2	551.2	533.5	341.7	379.2	491.6	396.8	-	381.4	399.0	-	-	-	-	-	72.2
75.5	360.5	551.2	525.8	338.4	361.6	482.8	390.2	244.7	362.7	391.3	306.4	-	306.4	317.5	-	75.5
78.7	341.7	551.2	518.1	335.1	343.9	474.0	383.6	244.7	343.9	383.6	306.4	-	306.4	317.5	-	78.7
82.0	326.3	551.2	510.4	331.8	327.4	465.2	377.0	243.6	328.5	375.9	300.9	-	303.1	310.9	238.1	82.0
85.3	310.9	551.2	502.7	328.5	310.9	456.4	370.4	242.5	313.1	368.2	295.4	-	299.8	304.2	238.1	85.3
88.6	296.5	551.2	494.9	326.3	297.6	448.6	364.9	239.2	299.8	361.6	291.0	186.3	293.2	298.7	237.0	88.6
91.9	282.2	551.2	487.2	324.1	284.4	440.9	359.4	235.9	286.6	354.9	286.6	186.3	286.6	293.2	235.9	91.9
98.4	257.9	551.2	474.0	317.5	257.9	423.3	348.3	231.5	262.4	341.7	277.8	181.9	262.4	282.2	227.1	98.4
111.5	211.6	537.9	447.5	308.6	218.3	396.8	328.5	220.5	220.5	319.7	262.4	174.2	220.5	264.6	215.0	111.5
124.7	177.5	511.5	423.3	295.4	175.3	372.6	310.9	212.7	181.9	299.8	246.9	166.4	186.3	246.9	201.7	124.7
137.8	142.7	481.7	402.3	285.5	148.3	351.6	296.5	205.6	151.0	282.2	232.6	159.3	151.6	232.6	189.6	137.8
150.9	114.1	455.3	383.6	275.6	119.5	331.8	282.2	197.9	125.7	265.7	219.9	152.1	125.7	218.3	179.1	150.9
164.0	90.5	429.9	367.1	266.8	95.7	314.2	269.0	191.3	101.3	250.2	209.4	146.1	104.8	205.0	169.2	164.0
177.2	70.4	409.0	351.6	259.0	75.3	298.7	256.8	185.2	80.6	235.9	199.0	140.5	84.2	192.9	160.4	177.2
190.3	53.4	391.3	337.3	252.4	57.9	284.4	245.8	179.1	62.8	223.8	189.6	135.6	66.2	182.4	152.7	190.3
203.4	38.6	377.0	325.2	245.8	42.9	271.2	234.8	173.6	47.6	213.3	181.3	131.2	50.8	173.1	145.5	203.4
216.5	25.7	359.4	315.3	240.3	29.8	260.1	224.9	168.7	34.4	203.4	174.2	126.8	37.3	164.8	139.4	216.5
229.7	14.3	335.1	307.9	235.9	18.2	250.2	217.5	164.2	22.7	194.0	167.6	122.9	25.4	157.1	133.9	229.7
232.9	11.7	328.5	306.4	234.8	15.5	247.5	216.1	163.1	20.0	191.8	165.9	122.1	22.6	155.2	132.6	232.9
236.2	-	321.9	304.2	233.7	12.8	244.7	213.8	162.0	17.2	189.6	164.2	121.3	19.8	153.2	131.2	236.2
242.8	-	309.7	298.7	231.5	-	240.3	210.5	159.8	12.1	186.3	161.3	119.8	14.8	149.9	128.4	242.8
246.1	-	303.7	296.0	230.4	-	238.1	208.9	158.7	-	184.1	159.8	119.0	12.3	148.3	127.0	246.1
255.9	-	286.6	284.4	227.1	-	231.5	203.9	156.0	-	178.6	155.4	116.3	-	143.9	123.5	255.9
269.0	-	265.7	266.8	222.7	-	223.2	197.3	153.2	-	172.0	150.5	113.5	-	138.3	119.0	269.0
278.9	-	249.1	251.3	220.5	-	217.7	192.9	151.3	-	167.3	146.6	111.9	-	134.2	116.0	278.9
282.2	-	242.5	244.7	-	-	216.1	191.8	150.5	-	165.9	145.5	111.3	-	132.8	115.2	282.2
295.3	-	217.2	218.8	-	-	209.4	187.4	147.7	-	160.4	141.8	109.6	-	127.9	111.9	295.3
308.4	-	192.9	194.4	-	-	200.6	183.0	-	-	155.4	138.3	108.2	-	123.5	108.9	308.4
311.7	-	186.8	188.5	-	-	197.9	181.9	-	-	154.3	137.5	107.8	-	122.4	108.1	311.7
315.0	-	180.8	-	-	-	195.1	180.8	-	-	153.2	136.7	107.4	-	121.3	107.4	315.0
321.5	-	174.7	-	-	-	184.1	178.0	-	-	151.0	135.0	-	-	120.2	106.0	321.5
328.1	-	168.7	-	-	-	173.1	175.3	-	-	148.8	133.4	-	-	117.9	104.7	328.1
331.4	-	-	-	-	-	168.1	169.8	-	-	148.0	132.8	-	-	117.4	104.2	331.4
334.6	-	-	-	-	-	165.3	-	-	-	147.2	132.3	-	-	116.8	103.6	334.6
347.8	-	-	-	-	-	152.1	-	-	-	143.9	129.7	-	-	113.5	101.5	347.8
351.1	-	-	-	-	-	-	-	-	-	143.0	129.0	-	-	113.0	101.0	351.1
360.9	-	-	-	-	-	-	-	-	-	140.0	-	-	-	111.2	99.8	360.9
367.5	-	-	-	-	-	-	-	-	-	137.8	-	-	-	110.0	99.0	367.5
370.7	-	-	-	-	-	-	-	-	-	-	-	-	-	109.6	98.5	370.7
374.0	-	-	-	-	-	-	-	-	-	-	-	-	-	109.1	-	374.0
383.9	-	-	-	-	-	-	-	-	-	-	-	-	-	107.8	-	383.9

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%																	
216.5 ft																	
49.2 ft 68.9 ft 88.6 ft 108.3 ft																	
0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb																	
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°																	
ft 1,000 lb ft																	
45.9	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	45.9
49.2	551.2	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	49.2
52.5	551.2	551.2	551.2	-	-	526.9	549.0	-	-	-	-	-	-	-	-	-	52.5
55.8	551.2	551.2	547.8	354.9	518.1	532.4	414.5	-	-	-	-	-	-	-	-	-	55.8
59.1	551.2	551.2	544.5	354.9	509.3	518.1	414.5	-	407.9	414.5	-	-	-	-	-	-	59.1
65.6	520.3	551.2	526.9	343.9	482.8	489.4	394.6	253.5	399.0	401.2	313.1	-	326.3	330.7	-	-	65.6
72.2	472.9	551.2	504.9	336.2	451.9	466.3	378.1	246.9	378.1	381.4	303.1	-	314.2	317.5	244.7	-	72.2
78.7	425.5	551.2	482.8	328.5	421.1	443.1	361.6	240.3	359.4	361.6	293.2	190.7	302.0	304.2	244.7	-	78.7
85.3	385.8	546.7	464.1	319.7	385.8	422.2	348.3	233.7	342.8	345.0	282.2	186.3	287.7	289.9	234.8	-	85.3
88.6	366.0	544.5	454.7	315.3	368.2	411.7	341.7	230.4	334.6	336.8	276.7	184.1	280.5	282.7	229.8	147.7	88.6
91.9	346.1	542.3	445.3	310.9	350.5	401.2	335.1	227.1	326.3	328.5	271.2	181.9	273.4	275.6	224.9	147.7	91.9
98.4	319.7	521.4	431.0	302.0	324.1	385.8	323.0	221.0	308.6	315.3	261.2	176.4	262.4	264.6	217.2	144.4	98.4
111.5	269.0	481.7	403.4	286.6	272.3	356.0	300.9	209.4	271.2	291.0	242.5	166.4	241.4	243.6	202.3	136.7	111.5
124.7	225.4	447.5	378.1	273.4	228.2	329.6	281.1	199.5	232.6	269.0	226.5	158.2	223.2	225.4	189.0	129.0	124.7
137.8	191.4	418.9	356.4	261.6	194.4	307.9	263.8	191.1	198.8	249.9	213.1	150.6	199.9	210.2	177.5	122.7	137.8
150.9	162.0	392.4	337.3	251.3	164.2	288.8	249.1	183.0	168.7	233.7	200.6	143.3	169.8	196.2	166.4	116.8	150.9
164.0	139.3	371.8	322.6	244.0	142.2	272.6	237.4	175.6	145.9	220.5	190.3	137.4	147.0	183.7	156.9	112.0	164.0
177.2	119.4	352.7	308.6	236.6	122.4	257.9	226.7	169.4	125.7	208.7	180.8	132.3	126.8	172.7	148.4	107.4	177.2
190.3	102.5	335.1	295.4	229.3	104.9	244.7	217.2	164.2	108.0	198.4	172.0	127.9	109.3	163.1	141.1	103.2	190.3
203.4	88.6	321.9	285.1	224.9	90.8	234.4	209.1	159.8	93.8	188.9	165.3	123.5	94.9	155.8	135.2	99.6	203.4
216.5	75.9	309.4	276.3	-	78.0	224.9	201.7	156.0	80.8	180.0	159.1	119.8	81.9	148.8	129.7	96.3	216.5
223.1	70.3	303.5	272.6	-	72.3	220.5	198.4	154.3	75.0	176.0	156.2	118.3	76.0	145.5	127.1	94.8	223.1
229.7	64.6	297.6	269.0	-	66.6	216.1	195.1	-	69.2	172.0	153.2	116.8	70.1	142.2	124.6	93.3	229.7
242.8	55.1	288.8	-	-	57.2	208.7	189.2	-	59.5	165.3	148.1	114.6	60.4	136.3	120.2	90.9	242.8
249.3	-	-	-	-	52.5	205.0	186.3	-	54.7	162.0	145.5	-	55.6	133.4	117.9	89.7	249.3
255.9	-	-	-	-	48.4	202.3	-	-	50.7	159.5	143.7	-	51.4	130.8	116.1	88.8	255.9
262.5	-	-	-	-	44.3	199.5	-	-	46.7	156.9	141.8	-	47.3	128.2	114.3	88.0	262.5
269.0	-	-	-	-	-	-	-	-	42.8	154.3	140.0	-	43.2	125.7	112.4	-	269.0
275.6	-	-	-	-	-	-	-	-	39.0	152.1	-	-	39.8	123.8	111.2	-	275.6
282.2	-	-	-	-	-	-	-	-	-	-	-	-	36.3	122.0	109.9	-	282.2
288.7	-	-	-	-	-	-	-	-	-	-	-	-	32.8	120.2	108.7	-	288.7
295.3	-	-	-	-	-	-	-	-	-	-	-	-	29.8	119.0	-	-	295.3

0 lb

176,400 lb

352,800 lb

529,200 lb

705,600 lb

882,000 lb

992,100 lb

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%																	
<																	

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%																
255.9 ft																
49.2 ft 68.9 ft 88.6 ft 108.3 ft																
0 lb 0 – 992,100 lb 0 lb 0 – 992,100 lb 0 lb 0 – 992,100 lb 0 lb 0 – 992,100 lb																
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°																
ft 1,000 lb ft																
49.2	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	49.2
52.5	551.2	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	52.5
55.8	545.6	551.2	551.2	-	524.7	546.7	-	-	-	-	-	-	-	-	-	55.8
59.1	540.1	551.2	551.2	352.7	524.7	533.5	414.5	-	-	-	-	-	-	-	-	59.1
62.3	511.5	551.2	545.6	350.5	501.6	520.3	411.2	-	407.9	414.5	-	-	-	-	-	62.3
65.6	482.8	551.2	540.1	348.3	478.4	507.1	407.9	-	407.9	414.5	-	-	-	-	-	65.6
68.9	460.8	551.2	530.8	344.5	456.9	495.5	399.6	-	399.0	405.1	315.3	-	317.5	328.5	-	68.9
72.2	438.7	551.2	521.4	340.6	435.4	483.9	391.3	249.1	390.2	395.7	310.9	-	315.3	323.3	-	72.2
75.5	416.7	551.2	512.0	336.8	413.9	472.3	383.1	248.0	381.4	386.4	306.4	-	313.1	318.2	246.9	75.5
78.7	394.6	551.2	502.7	332.9	392.4	460.8	374.8	246.9	372.6	377.0	302.0	-	310.9	313.1	246.9	78.7
82.0	378.6	550.6	494.4	329.6	376.4	451.4	368.2	243.6	361.6	368.7	296.5	190.7	304.2	306.4	243.1	82.0
85.3	362.7	550.1	486.1	326.3	360.5	442.0	361.6	240.3	350.5	360.5	291.0	188.9	297.6	299.8	239.2	85.3
91.9	330.7	549.0	469.6	319.7	328.5	423.3	348.3	233.7	328.5	343.9	280.0	185.2	284.4	286.6	231.5	91.9
98.4	305.3	541.2	454.2	312.0	300.9	407.9	337.3	228.2	304.2	330.7	271.2	180.8	273.4	275.6	224.3	98.4
111.5	254.6	515.9	426.6	297.6	253.5	378.1	316.4	217.2	255.7	306.4	253.5	172.0	248.0	254.6	210.0	111.5
124.7	210.5	481.7	402.3	285.5	215.0	352.7	297.6	207.2	216.1	285.5	238.1	163.7	214.4	237.0	196.8	124.7
137.8	177.1	451.2	380.7	274.8	181.1	331.4	281.5	198.8	185.6	267.5	225.2	156.5	182.6	222.3	185.6	137.8
150.9	147.7	423.3	361.6	264.6	151.0	310.9	266.8	190.7	155.4	251.3	212.7	149.9	157.6	208.3	175.3	150.9
164.0	124.9	401.2	343.9	255.7	128.2	293.2	253.5	184.1	132.6	236.6	201.7	144.0	134.1	195.8	166.4	164.0
177.2	105.0	381.4	328.5	247.7	108.2	277.8	241.8	177.8	112.3	223.8	192.2	138.5	113.6	184.8	158.0	177.2
190.3	88.0	363.8	315.3	240.3	90.8	264.6	231.5	172.0	94.4	212.7	184.1	133.4	96.1	175.3	149.9	190.3
203.4	73.9	349.1	305.0	234.4	76.6	252.8	223.4	166.8	80.0	203.2	176.7	129.7	81.6	167.2	144.0	203.4
216.5	61.1	335.1	294.7	229.3	63.6	241.8	215.3	162.4	66.9	194.4	169.8	126.0	68.3	159.5	138.5	216.5
229.7	49.8	321.9	284.4	224.9	52.0	231.5	207.2	158.7	55.1	186.3	163.1	122.4	56.4	152.1	133.4	229.7
236.2	45.0	315.3	280.7	222.7	47.3	227.4	204.3	157.3	50.2	182.6	160.6	120.9	51.5	149.2	130.8	236.2
242.8	40.3	308.6	277.0	-	42.5	223.4	201.4	155.8	45.3	178.9	158.0	119.4	46.6	146.2	128.2	242.8
255.9	31.6	287.3	271.2	-	33.7	216.1	195.8	153.2	36.3	172.3	153.2	116.8	37.5	140.7	123.8	255.9
262.5	27.7	272.6	269.0	-	29.6	212.7	193.3	-	32.3	169.4	151.0	115.7	33.3	138.2	122.0	262.5
269.0	23.8	260.1	-	-	25.6	209.4	190.7	-	28.2	166.4	148.8	114.6	29.1	135.6	120.2	269.0
275.6	20.3	251.3	-	-	22.1	206.9	188.5	-	24.7	163.9	146.6	-	25.6	133.4	118.3	275.6
282.2	-	-	-	-	18.7	204.3	186.3	-	21.2	161.3	144.4	-	22.0	131.2	116.5	282.2
288.7	-	-	-	-	15.2	201.7	-	-	17.6	158.7	142.2	-	18.5	129.0	114.6	288.7
295.3	-	-	-	-	12.3	199.5	-	-	14.6	156.5	141.1	-	15.4	126.8	113.0	295.3
301.8	-	-	-	-	-	-	-	-	11.5	154.3	140.0	-	12.3	124.6	111.3	301.8
308.4	-	-	-	-	-	-	-	-	-	152.1	-	-	-	123.5	110.2	308.4
315.0	-	-	-	-	-	-	-	-	-	151.0	-	-	-	121.6	109.5	315.0
321.5	-	-	-	-	-	-	-	-	-	-	-	-	-	119.8	108.7	321.5
328.1	-	-	-	-	-	-	-	-	-	-	-	-	-	117.9	-	328.1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%																			
275.6 ft																			
49.2 ft 68.9 ft 88.6 ft 108.3 ft																			
0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb																			
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°																			
ft 1,000 lb ft																			
49.2	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	49.2
52.5	551.2	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	52.5
55.8	535.7	551.2	551.2	-	515.9	537.9	-	-	-	-	-	-	-	-	-	-	-	-	55.8
59.1	520.3	551.2	551.2	-	515.9	537.9	-	-	-	-	-	-	-	-	-	-	-	-	59.1
62.3	492.7	551.2	547.8	352.7	488.3	524.7	410.1	-	401.2	416.7	-	-	-	-	-	-	-	-	62.3
65.6	465.2	551.2	544.5	350.5	460.8	511.5	410.1	-	401.2	416.7	-	-	-	-	-	-	-	-	65.6
68.9	443.7	551.2	536.3	346.7	440.4	501.0	402.3	-	395.2	407.9	317.5	-	319.7	332.9	-	-	-	-	68.9
72.2	422.2	551.2	528.0	342.8	420.0	490.5	394.6	251.3	389.1	399.0	313.1	-	317.5	327.8	-	-	-	-	72.2
78.7	379.2	551.2	511.5	335.1	379.2	469.6	379.2	246.9	377.0	381.4	304.2	-	313.1	317.5	246.9	-	-	-	78.7
82.0	363.8	551.2	503.2	331.8	363.2	460.2	373.1	244.2	361.6	373.7	299.3	189.6	307.0	310.9	244.2	-	-	-	82.0
85.3	348.3	551.2	494.9	328.5	347.2	450.8	367.1	241.4	346.1	366.0	294.3	188.5	300.9	304.2	241.4	-	-	-	85.3
91.9	317.5	551.2	478.4	321.9	315.3	432.1	354.9	235.9	315.3	350.5	284.4	186.3	288.8	291.0	235.9	-	-	-	91.9
95.1	303.1	550.1	470.7	318.6	303.1	424.4	349.4	233.1	303.7	343.9	279.4	184.1	283.3	285.5	231.8	147.7	-	-	95.1
98.4	288.8	549.0	463.0	315.3	291.0	416.7	343.9	230.4	292.1	337.3	274.5	181.9	277.8	280.0	227.6	146.6	-	-	98.4
111.5	241.4	529.1	435.4	302.0	242.5	388.0	323.0	219.9	245.8	313.1	256.8	173.1	246.9	260.1	212.7	141.1	-	-	111.5
124.7	203.4	494.9	412.3	289.9	203.4	362.7	304.2	210.5	208.3	292.1	242.5	165.3	207.8	242.5	200.1	134.5	-	-	124.7
137.8	169.0	464.4	391.0	279.3	173.4	340.2	288.1	202.1	178.6	274.1	230.0	158.7	176.0	227.1	188.9	128.2	-	-	137.8
150.9	138.9	436.5	370.4	269.0	143.3	319.7	273.4	194.0	147.7	257.9	218.3	152.1	151.0	213.8	178.6	122.4	-	-	150.9
164.0	117.0	413.0	354.2	260.1	121.0	302.0	260.1	187.4	124.9	243.2	207.2	146.2	127.5	201.4	169.8	117.9	-	-	164.0
177.2	97.3	393.2	339.5	252.1	100.9	286.6	248.4	181.1	104.6	230.4	197.3	140.7	106.8	190.3	161.7	113.8	-	-	177.2
190.3	79.8	377.0	326.3	244.7	83.1	273.4	238.1	175.3	86.9	219.4	188.5	135.6	88.8	180.8	154.3	109.8	-	-	190.3
203.4	65.8	362.3	314.5	238.8	68.9	261.6	229.3	170.1	72.3	209.8	181.1	131.9	74.3	172.0	147.7	106.1	-	-	203.4
216.5	53.1	348.3	303.5	233.7	55.9	250.6	221.2	165.7	59.2	200.6	174.2	128.2	61.0	164.2	141.8	102.7	-	-	216.5
229.7	41.4	335.1	293.2	229.3	44.1	240.3	213.8	162.0	47.4	191.8	167.6	124.6	48.9	157.6	136.7	99.6	-	-	229.7
242.8	32.0	320.4	284.4	224.9	34.4	231.5	206.5	158.4	37.6	184.5	162.4	121.6	38.9	151.0	131.5	96.9	-	-	242.8
249.3	27.3	313.1	280.0	222.7	29.5	227.1	202.8	156.5	32.6	180.8	159.8	120.2	34.0	147.7	129.0	95.5	-	-	249.3
255.9	23.4	299.1	276.3	-	25.5	223.4	200.3	155.4	28.5	177.5	157.3	118.7	29.8	145.1	127.1	94.4	-	-	255.9
269.0	15.4	271.2	269.0	-	17.4	216.1	195.1	153.2	20.3	170.9	152.1	115.7	21.4	140.0	123.5	92.2	-	-	269.0
275.6	11.7	255.7	255.7	-	13.7	212.7	192.9	-	16.6	168.1	149.9	115.2	17.7	137.2	121.6	91.2	-	-	275.6
282.2	-	240.3	240.3	-	-	210.0	190.7	-	13.0	165.3	147.7	114.6	14.1	134.5	119.8	90.2	-	-	282.2
288.7	-	229.3	-	-	-	207.2	188.5	-	-	163.1	146.6	113.5	-	132.3	117.9	89.3	-	-	288.7
295.3	-	-	-	-	-	204.7	186.3	-	-	160.9	144.8	-	-	130.4	116.5	88.6	-	-	295.3
301.8	-	-	-	-	-	202.1	-	-	-	158.7	142.9	-	-	128.6	115.0	87.7	-	-	301.8
308.4	-	-	-	-	-	199.5	-	-	-	156.5	141.1	-	-	126.8	113.5	-	-	-	308.4
315.0	-	-	-	-	-	-	-	-	-	154.7	140.0	-	-	124.9	112.3	-	-	-	315.0
321.5	-	-	-	-	-	-	-	-	-	152.9	-	-	-	123.1	111.0	-	-	-	321.5
328.1	-	-	-	-	-	-	-	-	-	151.0	-	-	-	121.3	109.8	-	-	-	328.1
334.6	-	-	-	-	-	-	-	-	-	-	-	-	-	120.2	-	-	-	-	334.6
341.2	-	-	-	-	-	-	-	-	-	-	-	-	-	119.0	-	-	-	-	341.2

0 lb

176,400 lb

352,800 lb

529,200 lb

705,600 lb

882,000 lb

992,100 lb

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%																	
295.3 ft																	
49.2 ft 68.9 ft 88.6 ft 108.3 ft																	
0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb																	
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°																	
ft 1,000 lb ft																	
52.5	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	52.5
55.8	526.9	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	55.8
59.1	502.7	551.2	551.2	-	496.0	529.1	-	-	-	-	-	-	-	-	-	-	59.1
62.3	476.2	551.2	550.1	350.5	470.7	523.6	412.3	-	-	-	-	-	-	-	-	-	62.3
65.6	449.7	551.2	549.0	350.5	445.3	518.1	412.3	-	396.8	412.3	-	-	-	-	-	-	65.6
72.2	407.9	551.2	533.5	343.9	405.7	496.0	397.9	-	380.3	399.0	313.1	-	315.3	326.3	-	-	72.2
75.5	386.9	551.2	525.8	340.6	385.8	485.0	390.8	249.1	372.0	392.4	309.7	-	315.3	323.0	-	-	75.5
78.7	366.0	551.2	518.1	337.3	366.0	474.0	383.6	249.1	363.8	385.8	306.4	-	315.3	319.7	244.7	-	78.7
85.3	335.1	551.2	501.6	330.7	335.1	457.5	371.5	242.5	334.0	370.4	296.5	189.6	303.1	307.5	240.3	-	85.3
91.9	304.2	551.2	485.0	324.1	304.2	440.9	359.4	235.9	304.2	354.9	286.6	187.4	291.0	295.4	235.9	-	91.9
95.1	292.1	550.1	477.9	321.3	292.7	432.7	353.8	233.7	292.7	348.9	282.2	185.2	282.7	289.9	232.6	146.6	95.1
98.4	280.0	549.0	470.7	318.6	281.1	424.4	348.3	231.5	281.1	342.8	277.8	183.0	274.5	284.4	229.3	146.2	98.4
111.5	236.4	535.7	444.2	306.4	235.3	394.6	327.4	222.1	238.1	319.7	261.2	174.7	239.2	264.6	216.1	142.2	111.5
124.7	197.3	508.2	421.1	294.3	197.9	370.4	309.7	212.7	199.0	298.7	246.9	167.0	201.7	246.9	203.4	135.6	124.7
137.8	162.8	476.9	399.8	283.7	167.9	349.1	294.7	204.7	167.2	280.7	234.4	160.2	170.5	231.5	192.2	129.7	137.8
150.9	133.4	447.5	379.2	273.4	137.8	328.5	280.0	197.3	142.2	264.6	222.7	154.3	145.5	218.3	181.9	124.6	150.9
164.0	110.9	424.0	361.6	264.6	114.9	310.9	266.8	190.0	119.1	249.9	211.6	148.4	122.0	206.5	173.1	119.4	164.0
177.2	90.8	403.4	346.1	256.5	94.4	294.7	255.0	183.7	98.5	236.6	201.7	143.3	101.1	195.5	165.0	115.0	177.2
190.3	73.2	385.8	332.9	249.1	76.5	280.0	244.7	178.6	80.5	224.9	192.9	138.9	82.9	185.2	157.6	111.3	190.3
203.4	59.1	372.6	322.6	243.2	62.2	268.2	234.4	173.4	66.1	215.3	185.6	134.5	68.2	176.4	151.0	107.7	203.4
216.5	46.3	359.4	312.3	237.4	49.2	257.2	226.0	168.7	52.9	206.1	178.6	130.4	54.8	168.7	145.1	104.3	216.5
229.7	34.8	346.1	302.0	231.5	37.5	246.9	219.4	164.2	41.0	197.3	172.0	126.8	42.8	162.0	140.0	101.2	229.7
242.8	25.3	324.1	293.2	227.1	27.8	238.1	212.0	160.6	31.2	190.0	166.1	123.8	32.8	155.4	134.8	98.5	242.8
255.9	16.4	302.0	284.4	224.9	18.7	229.3	205.6	157.6	22.0	183.0	160.9	120.9	23.5	149.5	130.1	96.0	255.9
262.5	12.3	291.0	280.0	222.7	14.6	224.9	202.8	156.5	17.9	179.7	158.7	119.4	19.3	147.0	127.9	94.9	262.5
269.0	-	277.8	273.4	-	-	222.7	199.5	155.4	13.7	176.4	156.5	117.9	15.0	144.4	125.7	93.7	269.0
275.6	-	263.8	261.6	-	-	219.4	197.3	154.3	-	173.4	154.3	116.8	11.2	141.1	124.6	92.7	275.6
282.2	-	249.9	249.9	-	-	216.1	195.1	153.2	-	170.5	152.1	115.7	-	138.9	122.4	91.7	282.2
295.3	-	223.0	224.9	-	-	210.2	191.1	-	-	165.3	148.1	114.1	-	134.5	118.7	89.9	295.3
301.8	-	210.9	-	-	-	207.6	189.2	-	-	163.1	146.2	113.5	-	132.3	117.2	89.1	301.8
308.4	-	203.9	-	-	-	205.0	187.4	-	-	160.9	144.4	-	-	130.1	115.7	88.4	308.4
315.0	-	-	-	-	-	198.8	185.2	-	-	158.7	142.9	-	-	128.2	114.3	87.7	315.0
321.5	-	-	-	-	-	192.5	-	-	-	156.5	141.5	-	-	126.4	112.8	87.1	321.5
328.1	-	-	-	-	-	186.3	-	-	-	154.3	140.0	-	-	124.6	111.3	-	328.1
334.6	-	-	-	-	-	-	-	-	-	152.7	-	-	-	123.1	110.5	-	334.6
341.2	-	-	-	-	-	-	-	-	-	151.0	-	-	-	121.6	109.7	-	341.2
347.8	-	-	-	-	-	-	-	-	-	-	-	-	-	120.2	108.9	-	347.8
354.3	-	-	-	-	-	-	-	-	-	-	-	-	-	119.0	108.0	-	354.3
360.9	-	-	-	-	-	-	-	-	-	-	-	-	-	117.9	-	-	360.9
367.5	-	-	-	-	-	-	-	-	-	-	-	-	-	116.8	-	-	367.5

0 lb

176,400 lb

352,800 lb

529,200 lb

705,600 lb

882,000 lb

992,100 lb

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%																	
315.0 ft 49.2 ft 68.9 ft 88.6 ft 108.3 ft 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 0 lb 0 - 992,100 lb 15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°																	
1,000 lb																	
ft																	ft
52.5	544.5	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	52.5
55.8	513.7	551.2	551.2	-	-	-	-	-	-	-	-	-	-	-	-	-	55.8
59.1	482.8	551.2	551.2	-	-	478.4	531.3	-	-	-	-	-	-	-	-	-	59.1
65.6	432.1	551.2	551.2	346.1	429.9	522.5	407.9	-	392.4	414.5	-	-	-	-	-	-	65.6
72.2	392.4	551.2	537.9	341.7	390.2	501.6	397.9	-	371.5	401.2	308.6	-	306.4	321.9	-	-	72.2
75.5	372.6	551.2	531.3	339.5	370.4	491.1	393.0	249.1	361.0	394.6	308.6	-	306.4	321.9	-	-	75.5
78.7	352.7	551.2	524.7	337.3	350.5	480.6	388.0	249.1	350.5	388.0	308.6	-	306.4	321.9	-	-	78.7
82.0	337.3	551.2	516.4	334.6	336.2	471.8	382.0	246.4	336.2	380.8	303.7	-	303.1	315.8	246.9	-	82.0
85.3	321.9	551.2	508.2	331.8	321.9	463.0	375.9	243.6	321.9	373.7	298.7	-	299.8	309.7	244.0	-	85.3
88.6	306.4	551.2	499.9	329.0	307.5	454.2	369.8	240.9	307.5	366.5	293.8	188.5	296.5	303.7	241.0	-	88.6
91.9	291.0	551.2	491.6	326.3	293.2	445.3	363.8	238.1	293.2	359.4	288.8	188.5	293.2	297.6	238.1	-	91.9
98.4	267.9	549.0	477.3	320.8	270.1	431.0	352.7	233.7	270.1	347.2	281.1	184.1	270.1	287.7	231.5	145.5	98.4
111.5	222.1	540.1	450.8	309.7	226.0	403.4	332.9	224.3	229.3	324.1	265.7	175.8	229.3	267.9	218.3	142.2	111.5
124.7	184.6	518.1	427.7	298.7	190.1	378.1	315.3	215.0	192.4	304.2	250.2	168.7	194.0	250.2	206.1	136.1	124.7
137.8	155.1	488.7	407.1	288.1	160.2	356.4	299.1	206.9	160.2	287.3	237.4	162.0	163.5	235.9	195.5	130.8	137.8
150.9	125.7	460.8	388.0	277.8	130.1	337.3	284.4	199.5	134.5	271.2	227.1	155.4	137.8	222.7	185.2	125.7	150.9
164.0	103.0	436.5	370.4	269.0	107.1	319.7	272.6	192.9	111.7	256.5	216.1	150.3	114.7	210.9	176.4	121.3	164.0
177.2	82.9	415.9	354.2	260.9	86.7	302.8	260.9	186.7	91.2	243.2	206.1	145.5	94.0	200.3	168.3	116.8	177.2
190.3	65.3	396.8	339.5	253.5	68.8	286.6	249.1	180.8	73.0	231.5	197.3	141.1	75.6	190.7	160.9	112.4	190.3
203.4	51.1	382.1	327.8	247.7	54.5	274.8	240.3	176.4	58.4	221.2	190.0	136.7	60.8	181.1	154.3	109.2	203.4
216.5	38.3	364.5	318.2	241.8	41.5	263.8	231.5	172.0	45.2	211.6	183.0	132.6	47.3	172.7	148.1	106.0	216.5
229.7	26.7	343.9	310.9	235.9	29.8	253.5	222.7	167.6	33.3	202.8	176.4	129.0	35.3	165.3	142.2	103.0	229.7
242.8	17.1	318.9	302.0	231.5	19.9	244.7	216.8	163.9	23.3	195.5	170.5	126.0	25.1	159.5	137.8	100.2	242.8
249.3	12.3	306.4	297.6	229.3	15.0	240.3	213.8	162.0	18.3	191.8	167.6	124.6	20.1	156.5	135.6	98.8	249.3
255.9	-	296.2	290.3	227.8	-	236.6	210.9	159.8	13.9	188.5	164.8	123.1	15.8	153.8	133.4	97.7	255.9
262.5	-	285.9	282.9	226.3	-	233.0	208.0	158.7	-	185.2	162.0	121.6	11.5	151.0	131.2	96.6	262.5
269.0	-	275.6	275.6	224.9	-	229.3	205.0	157.6	-	181.9	159.8	120.2	-	147.7	129.0	95.5	269.0
275.6	-	264.6	264.6	222.7	-	225.6	202.5	156.2	-	178.9	157.6	119.0	-	145.1	127.1	94.4	275.6
282.2	-	253.5	253.5	-	-	221.9	199.9	154.7	-	176.0	155.4	117.9	-	142.6	125.3	93.3	282.2
295.3	-	230.0	230.4	-	-	215.3	195.1	152.1	-	170.5	151.4	115.7	-	137.8	121.6	91.3	295.3
308.4	-	205.0	206.1	-	-	209.4	190.7	-	-	165.3	147.7	113.5	-	133.4	117.9	89.7	308.4
315.0	-	193.3	-	-	-	201.0	188.9	-	-	163.1	146.1	113.5	-	131.5	116.5	89.0	315.0
321.5	-	184.8	-	-	-	192.5	187.0	-	-	160.9	144.4	-	-	129.7	115.0	88.3	321.5
328.1	-	178.6	-	-	-	184.1	185.2	-	-	158.7	142.2	-	-	127.9	113.5	87.5	328.1
334.6	-	-	-	-	-	174.2	-	-	-	156.9	141.1	-	-	126.4	112.4	-	334.6
341.2	-	-	-	-	-	168.7	-	-	-	155.1	140.0	-	-	124.9	111.3	-	341.2
347.8	-	-	-	-	-	-	-	-	-	153.2	-	-	-	123.5	110.2	-	347.8
354.3	-	-	-	-	-	-	-	-	-	152.1	-	-	-	122.0	109.8	-	354.3
360.9	-	-	-	-	-	-	-	-	-	-	-	-	-	120.5	108.9	-	360.9
367.5	-	-	-	-	-	-	-	-	-	-	-	-	-	119.0	108.0	-	367.5
374.0	-	-	-	-	-	-	-	-	-	-	-	-	-	117.9	-	-	374.0
380.6	-	-	-	-	-	-	-	-	-	-	-	-	-	116.8	-	-	380.6

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

SSL/LSL+LF, SSL/LSL S1+LF

CC 6800-1

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%													
334.6 ft													
* SSL/LSL+LF ** SSL/LSL S1+LF													
** * ** * ** * ** *													
49.2 ft 68.9 ft 88.6 ft 108.3 ft													
0-992.1 0 lb 0 lb 0 lb – 992,100 lb													
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°													
1,000 lb													
ft													ft
55.8	498.2	551.2	493.8	551.2	-	-	-	-	-	-	-	-	55.8
59.1	469.6	551.2	467.4	551.2	551.2	549.0	-	-	-	-	-	-	59.1
62.3	445.3	551.2	442.0	551.2	551.2	544.5	-	-	-	-	-	-	62.3
65.6	421.1	551.2	416.7	551.2	551.2	540.1	377.0	339.5	518.1	500.4	388.0	-	65.6
68.9	401.8	551.2	397.4	551.2	551.2	532.4	374.8	337.3	515.9	491.6	385.3	-	68.9
72.2	382.5	551.2	378.1	551.2	551.2	524.7	372.6	335.1	513.7	482.8	382.5	-	72.2
75.5	363.2	551.2	358.8	551.2	551.2	517.0	370.4	332.9	511.5	474.0	379.7	-	75.5
78.7	343.9	551.2	339.5	551.2	551.2	509.3	368.2	330.7	509.3	465.2	377.0	242.5	78.7
85.3	315.3	551.2	310.9	551.2	544.5	494.9	363.8	326.3	494.9	449.7	366.0	238.1	85.3
88.6	300.9	551.2	296.5	551.2	541.2	487.8	361.6	324.1	487.8	442.0	360.5	235.9	88.6
91.9	286.6	551.2	282.2	551.2	537.9	480.6	359.4	321.9	480.6	434.3	354.9	233.7	91.9
98.4	263.5	551.2	259.0	551.2	523.6	468.5	353.8	316.4	465.2	420.0	345.0	229.3	98.4
111.5	220.5	551.2	215.5	535.7	496.0	444.2	343.9	306.4	436.5	393.5	326.3	220.5	111.5
124.7	185.7	543.4	180.2	506.0	470.7	422.2	335.1	296.5	411.2	371.5	309.7	212.2	124.7
137.8	155.8	522.5	150.3	478.4	448.3	402.7	325.5	285.9	388.0	352.0	295.4	204.7	137.8
150.9	125.7	500.4	120.2	451.9	427.7	383.6	315.3	275.6	366.0	332.9	282.2	197.3	150.9
164.0	103.3	479.9	98.0	429.9	408.6	367.4	306.4	266.8	348.3	316.7	270.4	191.4	164.0
177.2	83.3	460.0	78.0	410.1	391.7	352.7	296.9	259.4	331.4	301.3	258.7	185.6	177.2
190.3	65.7	440.9	60.4	392.4	377.0	339.5	286.6	253.5	315.3	286.6	246.9	179.7	190.3
203.4	51.4	407.1	46.3	377.7	363.8	327.8	279.3	246.2	302.0	274.8	238.1	173.8	203.4
216.5	38.6	374.8	33.5	360.8	352.0	317.5	271.9	240.3	290.3	263.8	229.3	168.7	216.5
229.7	27.1	343.9	22.0	341.7	341.7	308.6	264.6	235.9	280.0	253.5	220.5	164.2	229.7
242.8	17.4	318.9	12.1	315.3	319.7	301.6	258.7	232.4	269.7	244.7	213.4	159.8	242.8
249.3	12.6	306.4	-	304.2	308.6	297.6	255.7	229.3	264.6	240.3	209.4	157.6	249.3
255.9	-	296.2	-	293.2	297.6	289.5	253.5	227.1	260.1	235.9	206.1	156.7	255.9
269.0	-	275.6	-	271.2	275.6	273.4	249.1	222.7	251.3	227.1	199.5	153.2	269.0
282.2	-	257.9	-	253.5	257.9	254.3	244.7	219.7	242.5	220.5	194.4	150.3	282.2
288.7	-	249.1	-	244.7	249.1	244.7	242.5	218.3	238.1	217.2	191.8	148.8	288.7
292.0	-	243.8	-	239.2	244.0	239.6	-	217.2	235.9	215.5	190.5	148.3	292.0
295.3	-	238.5	-	233.7	238.8	234.4	-	-	233.7	213.8	189.2	147.7	295.3
308.4	-	217.2	-	211.6	218.3	213.8	-	-	224.9	207.2	184.1	145.5	308.4
311.7	-	211.6	-	206.3	212.7	208.3	-	-	219.9	204.5	183.2	145.5	311.7
321.5	-	195.1	-	190.3	196.2	191.8	-	-	205.0	196.2	180.6	-	321.5
328.1	-	184.1	-	179.7	185.2	180.8	-	-	195.1	190.7	178.6	-	328.1
334.6	-	173.6	-	169.5	-	-	-	-	185.2	180.8	175.8	-	334.6
341.2	-	167.6	-	163.8	-	-	-	-	175.3	170.9	173.1	-	341.2
344.5	-	-	-	160.9	-	-	-	-	170.9	165.9	168.1	-	344.5
347.8	-	-	-	-	-	-	-	-	166.4	160.9	163.1	-	347.8
354.3	-	-	-	-	-	-	-	-	157.6	155.0	-	-	354.3
360.9	-	-	-	-	-	-	-	-	150.1	-	-	-	360.9
364.2	-	-	-	-	-	-	-	-	147.7	-	-	-	364.2
367.5	-	-	-	-	-	-	-	-	-	-	-	-	367.5
374.0	-	-	-	-	-	-	-	-	-	-	-	-	374.0
380.6	-	-	-	-	-	-	-	-	-	-	-	-	380.6
383.9	-	-	-	-	-	-	-	-	-	-	-	-	383.9
387.1	-	-	-	-	-	-	-	-	-	-	-	-	387.1
393.7	-	-	-	-	-	-	-	-	-	-	-	-	393.7
400.3	-	-	-	-	-	-	-	-	-	-	-	-	400.3

0 lb 176,400 lb 352,800 lb 529,200 lb 705,600 lb 882,000 lb 992,100 lb

SSL/LSL+LF, SSL/LSL S1+LF

CC 6800-1

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%															
354.3 ft															
* SSL/LSL+LF ** SSL/LSL S1+LF															
** * ** * ** * ** *															
49.2 ft 68.9 ft 88.6 ft 108.3 ft															
0-992.1 klb 0 lb 0 lb 0 lb - 992,100 lb															
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°															
1,000 lb															
ft														ft	
55.8	478.4	551.2	474.0	551.2	-	-	-	-	-	-	-	-	-	55.8	
59.1	451.9	551.2	447.5	551.2	551.2	544.5	-	-	-	-	-	-	-	59.1	
62.3	428.8	551.2	423.3	551.2	551.2	544.5	-	-	489.4	489.4	-	-	-	62.3	
65.6	405.7	551.2	399.0	551.2	551.2	544.5	-	-	489.4	489.4	-	-	-	65.6	
68.9	386.9	551.2	380.3	551.2	551.2	536.8	374.8	337.3	489.4	483.9	390.2	-	388.0	379.2	68.9
72.2	368.2	551.2	361.6	551.2	551.2	529.1	372.6	335.1	489.4	478.4	386.5	-	387.3	377.0	72.2
75.5	349.4	551.2	342.8	551.2	551.2	521.4	370.4	332.9	489.4	472.9	382.9	-	386.5	374.8	75.5
78.7	330.7	551.2	324.1	551.2	551.2	513.7	368.2	330.7	489.4	467.4	379.2	240.3	385.8	372.6	78.7
85.3	302.0	551.2	295.4	551.2	544.5	499.3	363.8	326.3	486.1	453.1	368.2	238.1	385.8	360.5	85.3
91.9	273.4	551.2	266.8	551.2	537.9	485.0	359.4	321.9	482.8	438.7	357.1	235.9	385.8	348.3	91.9
98.4	251.3	551.2	244.7	549.0	526.9	472.9	354.9	317.5	470.7	424.4	348.3	230.4	375.9	337.3	98.4
101.7	240.3	551.2	233.7	547.8	521.4	466.8	352.7	315.3	465.7	417.2	343.9	227.6	370.9	331.8	101.7
111.5	211.1	551.2	203.9	536.8	502.7	448.6	346.1	307.5	447.5	397.9	330.7	221.6	356.0	317.5	111.5
124.7	178.0	550.1	170.9	511.5	476.2	426.6	337.3	297.6	422.2	375.9	314.2	214.4	336.2	299.8	124.7
137.8	148.1	532.8	141.5	484.3	453.4	407.1	328.5	288.1	399.0	356.4	299.8	206.9	317.5	282.9	137.8
150.9	117.9	509.3	111.3	460.8	434.3	388.0	319.7	277.8	377.0	337.3	286.6	199.5	299.8	266.8	150.9
164.0	95.5	488.7	88.7	438.7	416.7	371.8	309.4	270.4	357.9	321.1	273.4	193.6	285.1	255.0	164.0
177.2	75.4	465.2	68.6	418.1	400.5	357.1	299.8	263.1	340.2	305.7	261.6	187.8	271.2	243.2	177.2
190.3	57.8	438.7	50.9	399.0	385.8	343.9	291.0	255.7	324.1	291.0	251.3	181.9	257.9	231.5	190.3
203.4	43.5	402.0	36.7	384.3	372.6	332.2	283.7	248.4	310.9	279.3	242.5	176.7	246.2	221.9	203.4
216.5	30.6	368.9	23.7	362.3	357.1	321.9	276.3	242.5	299.1	268.2	233.7	171.6	235.2	212.4	216.5
229.7	19.0	339.5	12.1	332.9	339.5	313.1	269.0	238.1	288.8	257.9	224.9	166.4	224.9	202.8	229.7
236.2	13.9	326.3	-	320.4	326.3	308.2	266.8	235.9	283.3	253.5	221.6	164.2	220.5	198.6	236.2
242.8	-	314.2	-	307.9	314.2	302.9	263.5	233.7	277.8	249.1	218.3	162.6	216.1	194.7	242.8
255.9	-	291.0	-	285.1	291.7	286.6	257.2	230.0	268.2	241.0	211.6	159.1	207.6	187.0	255.9
269.0	-	269.0	-	264.6	271.2	264.6	251.3	227.1	257.9	233.7	205.0	155.4	199.5	179.7	269.0
282.2	-	251.3	-	245.4	252.1	246.9	246.9	222.7	247.7	226.3	199.2	152.5	192.9	173.8	282.2
295.3	-	234.1	-	227.4	234.8	229.3	235.9	218.7	235.2	219.4	193.6	149.5	186.7	167.9	295.3
301.8	-	225.6	-	219.0	227.1	220.5	227.1	216.9	227.8	216.1	191.1	148.1	183.7	165.0	301.8
305.1	-	221.4	-	214.8	223.2	216.1	-	216.1	224.1	214.4	189.8	147.3	182.2	163.5	305.1
308.4	-	217.2	-	210.5	219.4	211.6	-	-	220.5	212.7	188.5	146.6	180.8	162.0	308.4
321.5	-	196.6	-	190.1	198.8	191.1	-	-	203.6	198.4	184.1	145.0	175.6	157.6	321.5
324.8	-	191.4	-	184.9	193.6	185.9	-	-	199.3	193.5	183.0	144.4	174.3	156.5	324.8
334.6	-	176.7	-	170.1	178.6	171.1	-	-	185.9	179.3	175.6	-	170.9	153.2	334.6
341.2	-	167.2	-	160.6	168.7	161.4	-	-	176.7	170.1	169.4	-	168.7	151.0	341.2
344.5	-	162.4	-	155.8	-	156.5	-	-	172.1	165.5	166.3	-	167.6	149.9	344.5
347.8	-	157.6	-	151.0	-	-	-	-	167.6	160.9	163.1	-	166.4	148.8	347.8
354.3	-	151.0	-	146.1	-	-	-	-	158.7	152.5	154.3	-	161.7	147.3	354.3
360.9	-	-	-	141.1	-	-	-	-	149.9	144.0	145.5	-	156.9	145.9	360.9
364.2	-	-	-	-	-	-	-	-	145.5	140.2	141.1	-	154.5	145.1	364.2
374.0	-	-	-	-	-	-	-	-	137.8	132.8	-	-	144.0	137.1	374.0
380.6	-	-	-	-	-	-	-	-	133.4	127.9	-	-	136.0	130.1	380.6
383.9	-	-	-	-	-	-	-	-	-	-	-	-	133.4	127.9	383.9
387.1	-	-	-	-	-	-	-	-	-	-	-	-	131.2	125.7	387.1
393.7	-	-	-	-	-	-	-	-	-	-	-	-	126.8	120.9	393.7
400.3	-	-	-	-	-	-	-	-	-	-	-	-	-	115.7	400.3
403.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	403.5
413.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	413.4
419.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	419.9

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

SSL/LSL+LF, SSL/LSL S1+LF

CC 6800-1

551,200 lb + 176,400 lb 49.2-108.3 ft 49.2-78.7 ft 31.50 ft 32.2 ft/s 360° 75%														
374.0 ft														
* SSL/LSL+LF ** SSL/LSL S1+LF														
** * ** * ** * ** *														
49.2 ft 68.9 ft 88.6 ft 108.3 ft														
0-992.1 klb 0 lb 0 lb – 992,100 lb														
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°														
ft 1,000 lb ft														
59.1	436.5	551.2	434.3	546.7	-	-	-	-	-	-	-	-	-	59.1
62.3	413.4	551.2	411.2	546.7	542.3	502.7	-	-	-	-	-	-	-	62.3
65.6	390.2	551.2	388.0	546.7	542.3	502.7	-	-	-	-	-	-	-	65.6
68.9	372.0	551.2	369.8	546.7	541.8	502.7	372.6	343.9	465.2	445.3	401.2	-	-	68.9
72.2	353.8	551.2	351.6	546.7	541.2	502.7	371.1	342.5	465.2	445.3	399.8	-	370.4	366.0
78.7	317.5	551.2	315.3	546.7	540.1	502.7	368.2	339.5	465.2	445.3	396.8	-	370.4	366.0
82.0	303.7	551.2	301.5	546.7	537.9	501.6	365.4	337.3	465.2	445.3	391.9	253.5	370.4	364.9
85.3	289.9	551.2	287.7	546.7	535.7	500.4	362.7	335.1	465.2	445.3	386.9	251.3	370.4	363.8
88.6	276.1	551.2	273.9	546.7	533.5	499.3	359.9	332.9	465.2	445.3	382.0	249.1	370.4	362.7
91.9	262.4	551.2	260.1	546.7	531.3	498.2	357.1	330.7	465.2	445.3	377.0	246.9	370.4	361.6
98.4	241.4	551.2	238.7	546.7	523.6	492.7	353.8	326.3	463.0	438.7	368.2	241.4	367.1	353.8
105.0	220.5	551.2	217.2	546.7	515.9	487.2	350.5	321.9	463.0	432.1	359.4	235.9	363.8	346.1
111.5	202.8	551.2	199.5	546.7	504.9	476.2	346.1	318.6	450.8	420.0	348.3	230.4	356.0	336.2
124.7	166.4	551.2	163.1	531.3	481.7	455.3	337.3	312.0	426.6	396.8	328.5	220.5	339.5	317.5
137.8	135.6	541.6	132.4	504.9	460.0	435.8	329.2	303.5	404.2	377.7	311.6	212.0	322.6	299.1
150.9	111.3	522.5	108.5	480.6	440.9	416.7	321.9	293.2	383.6	357.1	295.4	203.9	306.4	280.0
164.0	88.8	498.2	85.8	460.0	423.3	400.5	313.1	284.4	364.5	341.0	282.2	197.3	291.7	265.3
177.2	68.8	469.6	65.6	444.6	407.1	382.9	304.2	275.6	347.6	324.8	269.7	190.7	277.8	251.3
190.3	51.1	434.3	47.8	429.9	392.4	368.2	295.4	266.8	332.9	308.6	257.9	184.1	264.6	238.1
203.4	36.9	397.6	33.6	394.6	379.2	354.9	288.1	259.4	318.2	293.9	247.7	178.9	252.8	227.8
216.5	23.9	363.8	20.5	361.1	360.1	342.2	280.7	252.2	305.7	281.3	238.1	173.8	241.0	217.9
226.4	15.1	340.6	11.7	337.3	341.3	332.9	275.2	246.9	298.0	273.4	231.5	169.9	232.2	210.7
229.7	12.1	332.9	-	330.7	335.1	328.5	273.4	244.7	295.4	269.0	229.3	168.7	229.3	208.3
242.8	-	307.9	-	305.7	310.1	306.4	267.9	240.7	284.4	258.7	223.3	164.9	221.2	199.5
255.9	-	285.1	-	282.9	286.6	284.4	261.6	235.2	275.6	249.1	216.1	161.3	213.1	191.8
269.0	-	264.6	-	262.4	264.6	262.4	255.7	229.3	266.8	240.3	209.4	157.6	205.0	185.2
282.2	-	245.4	-	243.2	246.9	244.7	244.0	226.3	247.7	233.0	203.6	154.0	197.7	178.6
295.3	-	228.5	-	226.3	230.0	227.8	230.4	220.8	230.4	223.8	198.0	151.5	191.1	172.3
308.4	-	213.8	-	211.6	213.8	211.6	215.0	212.7	215.0	212.7	192.9	148.8	185.2	166.4
315.0	-	206.1	-	202.6	207.2	203.7	208.3	206.1	208.3	206.1	190.7	147.7	182.4	164.2
318.2	-	201.4	-	198.0	202.5	199.1	-	201.7	204.8	202.3	189.6	147.2	181.1	163.1
321.5	-	196.8	-	193.3	197.9	194.4	-	-	201.2	198.4	188.5	146.6	179.7	162.0
334.6	-	178.2	-	175.3	179.3	176.4	-	-	185.6	182.2	180.0	144.8	174.9	157.6
337.9	-	173.6	-	170.9	174.7	172.0	-	-	181.3	178.0	176.9	144.4	173.6	156.5
347.8	-	159.8	-	157.6	160.9	158.7	-	-	168.7	165.3	167.6	-	169.8	153.2
354.3	-	151.4	-	148.8	152.1	149.9	-	-	160.2	157.3	159.1	-	163.9	151.4
357.6	-	147.2	-	144.4	-	145.5	-	-	156.0	153.2	154.9	-	160.9	150.5
360.9	-	142.9	-	140.0	-	141.1	-	-	151.8	149.2	150.6	-	158.0	149.5
367.5	-	135.6	-	133.4	-	-	-	-	143.3	141.1	142.2	-	152.1	147.7
374.0	-	-	-	129.0	-	-	-	-	135.6	133.0	134.5	-	144.8	140.7
377.3	-	-	-	126.8	-	-	-	-	131.7	129.0	130.6	-	141.1	137.2
380.6	-	-	-	-	-	-	-	-	127.9	125.7	126.8	-	137.4	133.7
387.1	-	-	-	-	-	-	-	-	123.5	121.3	-	-	130.1	126.8
393.7	-	-	-	-	-	-	-	-	120.2	116.8	-	-	122.9	119.7
397.0	-	-	-	-	-	-	-	-	114.6	-	-	-	119.6	117.4
400.3	-	-	-	-	-	-	-	-	-	-	-	-	117.6	115.4
406.8	-	-	-	-	-	-	-	-	-	-	-	-	113.5	111.3
413.4	-	-	-	-	-	-	-	-	-	-	-	-	106.3	-
416.7	-	-	-	-	-	-	-	-	-	-	-	-	103.8	-
426.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
433.1	-	-	-	-	-	-	-	-	-	-	-	-	97.9	101.2
436.4	-	-	-	-	-	-	-	-	-	-	-	-	-	95.2

0 lb 176,400 lb 352,800 lb 529,200 lb 705,600 lb 882,000 lb 992,100 lb

SSL/LSL+LF, SSL/LSL S1+LF

CC 6800-1

551,200 lb + 176,400 lb		49.2-108.3 ft		49.2-78.7 ft		31.50 ft		32.2 ft/s		360°		75%											
393.7 ft																							
* SSL/LSL+LF							** SSL/LSL S1+LF																
**				*		**		*		**		*											
49.2 ft				68.9 ft				88.6 ft				108.3 ft											
0 lb		992.1 klb		0 lb		0 lb – 992,100 lb																	
15°		20°		30°		15°		20°		30°		15°											
15°		20°		30°		15°		20°		30°		15°											
1,000 lb																							
ft													ft										
59.1	418.9	526.9	418.9	522.5	-	-	-	-	-	-	-	-	59.1										
62.3	396.8	526.9	396.8	522.5	507.1	502.7	-	-	-	-	-	-	62.3										
65.6	374.8	526.9	374.8	522.5	507.1	502.7	-	-	-	-	-	-	65.6										
72.2	339.5	526.9	339.5	522.5	507.1	502.7	368.2	346.1	440.9	436.5	407.9	-	72.2										
78.7	304.2	526.9	304.2	522.5	507.1	502.7	366.0	343.9	440.9	436.5	407.9	-	78.7										
82.0	291.0	526.9	291.0	522.5	507.1	501.0	363.8	341.7	440.9	436.5	402.3	255.7	82.0										
85.3	277.8	526.9	277.8	522.5	507.1	499.3	361.6	339.5	440.9	436.5	396.8	252.8	85.3										
88.6	264.6	526.9	264.6	522.5	507.1	497.7	359.4	337.3	440.9	436.5	391.3	249.9	88.6										
91.9	251.3	526.9	251.3	522.5	507.1	496.0	357.1	335.1	440.9	436.5	385.8	246.9	91.9										
95.1	240.9	526.9	240.9	521.9	504.9	493.3	354.9	333.4	440.9	436.5	380.3	244.2	95.1										
98.4	230.4	526.9	230.4	521.4	502.7	490.5	352.7	331.8	440.9	436.5	374.8	241.4	98.4										
105.0	209.4	526.9	209.4	520.3	498.2	485.0	348.3	328.5	440.9	436.5	363.8	235.9	105.0										
111.5	192.4	526.9	191.8	518.1	493.8	479.5	345.0	325.2	436.5	429.9	353.8	231.5	111.5										
124.7	158.2	524.7	157.6	508.2	482.8	467.4	338.4	317.5	424.4	412.3	334.0	222.7	124.7										
137.8	128.8	517.4	128.8	486.5	468.9	448.3	331.4	307.9	408.6	390.2	316.7	214.2	137.8										
150.9	104.1	511.5	104.3	471.8	454.2	427.7	324.1	297.6	388.0	368.2	302.0	206.1	150.9										
164.0	81.3	495.3	81.6	453.4	436.5	408.6	315.3	287.3	370.4	349.1	288.8	198.8	164.0										
177.2	61.0	468.9	61.4	435.8	419.6	391.0	307.2	277.8	354.2	331.4	276.3	192.2	177.2										
190.3	43.2	427.7	43.7	421.1	403.4	374.8	299.8	269.0	339.5	315.3	264.6	186.3	190.3										
203.4	29.0	391.0	29.4	388.7	384.3	361.6	292.5	261.6	326.3	302.0	254.3	181.1	203.4										
216.5	15.4	357.1	16.1	357.9	359.4	348.3	284.4	255.3	313.1	289.5	244.7	176.0	216.5										
219.8	-	350.0	13.0	350.5	351.6	345.0	282.2	254.0	309.7	286.6	242.5	174.7	219.8										
229.7	-	328.5	-	328.5	328.5	328.5	277.8	249.1	302.0	277.8	235.9	170.9	229.7										
242.8	-	303.5	-	303.5	303.5	303.5	271.9	243.2	291.7	266.0	227.1	166.4	242.8										
255.9	-	280.0	-	280.0	280.7	280.7	266.0	238.1	277.8	255.7	219.7	162.4	255.9										
269.0	-	257.9	-	257.9	260.1	260.1	260.1	233.7	260.1	246.9	213.8	158.7	269.0										
282.2	-	240.3	-	240.3	241.0	241.0	242.5	229.3	241.0	238.1	208.0	155.8	282.2										
295.3	-	223.2	-	223.8	223.8	224.0	225.4	221.6	224.3	225.8	202.1	152.9	295.3										
308.4	-	207.2	-	208.3	208.3	209.4	210.5	209.4	209.4	209.4	196.2	149.9	308.4										
321.5	-	191.8	-	192.9	193.6	193.6	194.7	195.8	195.5	195.5	191.8	147.9	321.5										
328.1	-	184.1	-	185.2	186.3	186.3	187.4	188.5	188.5	188.5	189.6	146.6	328.1										
331.4	-	179.9	-	181.0	181.9	182.1	-	184.1	184.6	184.6	185.9	146.2	331.4										
334.6	-	175.6	-	176.7	177.5	177.8	-	-	180.8	180.8	182.2	145.9	334.6										
347.8	-	158.7	-	159.8	159.8	160.9	-	-	165.3	165.3	167.6	144.4	347.8										
351.1	-	154.7	-	155.8	155.8	156.9	-	-	161.5	161.5	163.7	143.3	351.1										
360.9	-	142.6	-	143.7	143.7	144.8	-	-	149.9	149.9	152.1	-	360.9										
367.5	-	134.5	-	135.6	135.6	136.7	-	-	142.2	142.2	144.4	-	367.5										
370.7	-	130.6	-	131.5	-	132.6	-	-	138.3	138.5	140.7	-	370.7										
374.0	-	126.8	-	127.5	-	128.6	-	-	134.5	134.8	137.1	-	374.0										
377.3	-	123.5	-	123.5	-	124.6	-	-	130.6	131.2	133.4	-	377.3										
387.1	-	116.8	-	116.8	-	-	-	-	120.2	120.2	122.4	-	387.1										
390.4	-	114.6	-	114.5	-	-	-	-	116.6	116.8	118.5	-	390.4										
393.7	-	112.4	-	112.1	-	-	-	-	114.1	114.1	114.6	-	393.7										
397.0	-	-	-	109.8	-	-	-	-	112.1	112.1	112.4	-	397.0										
400.3	-	-	-	-	-	-	-	-	110.2	110.2	-	-	400.3										
406.8	-	-	-	-	-	-	-	-	106.3	106.3	-	-	406.8										
413.4	-	-	-	-	-	-	-	-	101.2	101.2	-	-	413.4										
416.7	-	-	-	-	-	-	-	-	-	-	-	-	416.7										
426.5	-	-	-	-	-	-	-	-	-	-	-	-	426.5										
433.1	-	-	-	-	-	-	-	-	-	-	-	-	433.1										
439.6	-	-	-	-	-	-	-	-	-	-	-	-	439.6										
446.2	-	-	-	-	-	-	-	-	-	-	-	-	446.2										
452.8	-	-	-	-	-	-	-	-	-	-	-	-	452.8										

0 lb 176,400 lb 352,800 lb 529,200 lb 705,600 lb 882,000 lb 992,100 lb

SSL/LSL+LF, SSL/LSL S1+LF

CC 6800-1

551,200 lb +  176,400 lb  49.2-108.3 ft  49.2-78.7 ft  31.50 ft  32.2 ft/s 360° 75%																	
413.4 ft																	
* SSL/LSL+LF ** SSL/LSL S1+LF																	
** * ** * ** * ** *																	
49.2 ft 68.9 ft 88.6 ft 108.3 ft																	
0-992.1 klb 0 lb 0 lb 0 lb – 992,100 lb																	
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°																	
1,000 lb																	
ft																	ft
62.3	385.8	458.6	383.6	471.8	-	-	-	-	-	-	-	-	-	-	-	-	62.3
65.6	363.8	458.6	363.8	471.8	438.7	454.2	-	-	-	-	-	-	-	-	-	-	65.6
68.9	347.2	458.6	346.7	471.8	438.7	454.2	-	-	-	-	-	-	-	-	-	-	68.9
72.2	330.7	458.6	329.6	471.8	438.7	454.2	359.4	341.7	387.3	401.2	-	-	-	-	-	-	72.2
75.5	314.2	458.6	312.5	471.8	438.7	454.2	358.3	341.7	386.5	401.2	379.2	-	324.1	324.1	-	-	75.5
78.7	297.6	458.6	295.4	471.8	438.7	454.2	357.1	341.7	385.8	401.2	379.2	-	324.1	324.1	-	-	78.7
82.0	284.4	458.6	282.2	471.8	438.7	454.2	354.9	340.1	385.8	401.2	379.2	-	324.1	324.1	310.9	-	82.0
85.3	271.2	458.6	269.0	471.8	438.7	454.2	352.7	338.4	385.8	401.2	379.2	253.5	324.1	324.1	307.9	-	85.3
91.9	244.7	458.6	242.5	471.8	438.7	454.2	348.3	335.1	385.8	401.2	379.2	249.1	324.1	324.1	302.0	-	91.9
95.1	234.5	458.6	232.3	471.2	438.7	454.2	346.7	333.4	385.8	400.7	376.4	246.4	324.1	324.1	297.6	187.4	95.1
98.4	224.3	458.6	222.1	470.7	438.7	454.2	345.0	331.8	385.8	400.1	373.7	243.6	324.1	324.1	293.2	185.2	98.4
108.3	195.4	458.6	193.5	467.9	438.7	453.1	340.1	326.8	385.3	398.5	363.2	235.3	324.1	324.1	280.5	178.9	108.3
111.5	186.8	458.6	185.2	466.3	438.7	451.9	338.4	325.2	384.7	397.9	358.3	232.6	324.1	324.1	276.7	176.9	111.5
124.7	154.3	457.5	153.2	459.7	438.7	446.4	331.8	318.6	383.6	393.5	339.5	223.2	323.0	321.9	261.2	169.8	124.7
137.8	126.7	442.4	125.6	442.4	432.1	434.3	324.8	310.1	380.7	385.8	322.6	215.7	316.7	310.1	247.7	163.1	137.8
150.9	102.3	425.5	101.2	427.7	418.9	416.7	317.5	299.8	374.8	377.0	306.4	208.3	306.4	291.0	235.9	156.5	150.9
164.0	79.5	406.4	78.4	406.4	401.2	402.7	311.6	291.0	360.1	357.9	293.2	201.0	293.2	276.3	224.9	150.6	164.0
177.2	59.2	391.7	58.1	394.6	379.2	385.1	305.7	282.2	343.9	340.2	280.7	194.4	280.7	262.4	215.0	145.5	177.2
190.3	41.4	381.4	40.3	381.4	370.4	374.8	299.8	273.4	335.1	324.1	269.0	188.5	269.0	249.1	206.1	141.1	190.3
203.4	27.0	366.0	26.1	367.4	354.2	359.4	293.9	266.0	317.5	309.4	258.7	183.4	258.7	237.4	198.0	136.7	203.4
216.5	13.7	354.9	12.8	354.9	346.1	349.1	287.7	259.4	308.6	296.2	249.1	178.2	246.9	227.1	190.3	132.6	216.5
229.7	-	326.3	-	326.3	328.5	326.3	282.2	253.5	295.4	284.4	240.3	173.1	238.1	218.3	183.0	129.0	229.7
242.8	-	301.3	-	301.3	302.0	301.3	274.8	247.7	288.1	272.6	231.5	168.7	230.8	209.4	176.4	125.3	242.8
255.9	-	277.8	-	277.8	278.5	278.5	267.5	241.8	275.6	262.4	224.1	164.6	223.0	201.4	170.5	122.0	255.9
269.0	-	255.7	-	255.7	257.9	257.9	260.1	235.9	257.9	253.5	218.3	160.9	215.0	194.0	165.3	119.0	269.0
282.2	-	238.1	-	238.1	238.8	238.8	241.0	231.5	240.3	237.4	211.6	158.0	207.6	187.4	160.2	116.4	282.2
295.3	-	220.5	-	221.2	222.1	221.9	223.8	222.1	223.2	222.1	205.6	155.1	200.6	181.0	155.4	113.5	295.3
308.4	-	206.1	-	205.0	207.2	206.1	208.3	207.2	207.2	207.2	200.6	152.1	194.0	175.3	151.0	111.3	308.4
321.5	-	192.2	-	191.8	193.3	192.2	194.4	193.3	193.3	193.3	191.8	149.9	188.9	170.1	147.3	109.7	321.5
334.6	-	177.5	-	177.1	178.6	177.5	180.2	178.9	179.7	179.3	180.8	147.7	180.8	165.0	143.7	108.1	334.6
341.2	-	169.8	-	169.0	170.9	169.8	173.1	171.6	173.1	172.3	174.2	146.6	175.3	162.4	141.8	107.3	341.2
347.8	-	162.0	-	160.9	163.1	162.0	-	164.2	166.4	165.3	167.6	145.5	169.8	159.8	140.0	106.5	347.8
360.9	-	146.6	-	145.5	147.7	146.6	-	-	151.8	150.6	152.9	144.0	156.5	152.5	137.1	105.0	360.9
367.5	-	138.9	-	137.8	140.0	138.9	-	-	144.4	143.3	145.5	143.3	149.9	148.8	135.6	104.3	367.5
374.0	-	131.7	-	130.6	132.3	131.7	-	-	137.2	136.7	138.5	-	143.3	142.2	134.1	103.8	374.0
383.9	-	120.7	-	119.6	121.3	120.7	-	-	126.8	126.8	127.9	-	133.4	132.3	131.9	103.2	383.9
387.1	-	116.8	-	115.7	117.9	116.8	-	-	123.5	123.5	124.6	-	130.1	129.0	131.2	-	387.1
393.7	-	111.0	-	109.7	111.3	110.2	-	-	117.0	116.8	117.9	-	123.8	122.7	124.8	-	393.7
400.3	-	107.4	-	105.9	-	-	-	-	110.5	110.1	111.3	-	117.6	116.5	118.6	-	400.3
403.5	-	105.6	-	104.0	-	-	-	-	107.3	106.7	108.0	-	114.5	113.4	115.5	-	403.5
406.8	-	103.8	-	102.1	-	-	-	-	104.5	103.4	104.7	-	111.3	110.2	112.4	-	406.8
413.4	-	-	-	96.8	-	-	-	-	100.2	98.9	99.4	-	105.2	104.3	106.3	-	413.4
426.5	-	-	-	-	-	-	-	-	91.7	91.7	-	-	95.5	92.8	93.9	-	426.5
433.1	-	-	-	-	-	-	-	-	86.4	85.5	-	-	91.9	89.5	90.2	-	433.1
439.6	-	-	-	-	-	-	-	-	-	-	-	-	87.3	86.2	-	-	439.6
446.2	-	-	-	-	-	-	-	-	-	-	-	-	82.7	82.0	-	-	446.2
449.5	-	-	-	-	-	-	-	-	-	-	-	-	-	79.1	-	-	449.5
452.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	452.8
459.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	459.3
465.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	465.9
469.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	469.2

0 lb 176,400 lb 352,800 lb 529,200 lb 705,600 lb 882,000 lb 992,100 lb

SSL/LSL+LF, SSL/LSL S1+LF

CC 6800-1

551,200 lb +  176,400 lb  49.2-108.3 ft  49.2-78.7 ft  31.50 ft  32.2 ft/s 360° 75%															
433.1 ft															
* SSL/LSL+LF ** SSL/LSL S1+LF															
** * ** * ** * ** * ** *															
49.2 ft 68.9 ft 88.6 ft 108.3 ft															
0-992.1 klb 0 lb 0 lb - 992,100 lb															
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°															
ft 1,000 lb ft															
62.3	370.4	427.7	366.0	410.1	-	-	-	-	-	-	-	-	-	62.3	
65.6	350.5	427.7	354.9	410.1	-	-	-	-	-	-	-	-	-	65.6	
68.9	334.0	427.7	337.9	410.1	410.1	374.8	-	-	363.8	330.7	-	-	-	68.9	
72.2	317.5	427.7	320.8	410.1	410.1	374.8	-	-	363.8	330.7	-	-	-	72.2	
75.5	300.9	427.7	303.7	410.1	410.1	374.8	350.5	315.3	363.8	330.7	297.6	-	306.4	275.6	75.5
78.7	284.4	427.7	286.6	410.1	410.1	374.8	350.5	315.3	363.8	330.7	297.6	-	306.4	275.6	78.7
82.0	271.7	427.7	273.9	409.5	410.1	374.8	348.9	314.7	363.8	330.7	297.6	-	306.4	275.6	82.0
85.3	259.0	427.7	261.2	409.0	410.1	374.8	347.2	314.2	363.8	330.7	297.6	238.1	306.4	275.6	85.3
91.9	233.7	427.7	235.9	407.9	410.1	374.8	343.9	313.1	363.8	330.7	297.6	238.1	306.4	275.6	91.9
98.4	213.3	427.7	216.1	404.5	410.1	373.7	341.7	309.7	363.8	329.6	297.6	234.8	306.4	275.6	98.4
108.3	184.6	427.1	187.9	399.6	410.1	371.5	337.9	304.8	363.8	327.4	297.1	229.3	305.9	274.5	108.3
111.5	176.4	426.6	179.7	397.9	410.1	370.4	336.2	303.1	363.8	326.3	296.5	227.1	305.3	273.4	111.5
124.7	145.5	424.4	149.4	391.3	410.1	364.9	329.6	297.6	362.7	319.7	292.1	219.9	304.2	267.9	124.7
137.8	116.6	418.1	123.5	382.9	407.1	357.1	323.3	292.5	359.4	310.9	285.1	213.8	303.5	260.9	137.8
150.9	87.5	407.9	99.2	372.6	401.2	348.3	317.5	286.6	354.9	302.0	277.8	207.2	302.0	253.5	150.9
164.0	69.4	391.7	76.4	354.9	380.7	338.0	311.6	279.3	347.6	291.7	270.4	200.6	296.2	244.7	164.0
177.2	51.4	372.6	56.1	333.6	363.0	321.1	305.7	272.6	327.0	280.7	262.4	194.7	288.1	235.9	177.2
190.3	33.5	363.8	38.4	321.9	352.7	299.8	299.8	266.8	319.7	269.0	253.5	189.6	277.8	227.1	190.3
203.4	19.3	346.1	24.1	300.7	338.8	291.0	293.9	260.9	303.5	258.7	244.7	184.5	264.6	219.7	203.4
210.0	12.1	341.7	17.0	295.4	335.1	286.6	291.0	257.9	299.8	253.5	240.3	181.9	257.9	216.1	210.0
213.3	-	338.0	13.7	293.2	332.9	281.1	289.9	254.6	297.6	248.0	238.8	180.8	256.1	213.8	213.3
216.5	-	334.4	-	291.0	330.7	275.6	288.8	253.5	295.4	242.5	237.4	179.7	254.3	211.6	216.5
229.7	-	319.7	-	282.2	321.9	266.8	284.4	249.1	286.6	231.5	222.7	175.3	246.9	203.9	229.7
242.8	-	294.7	-	269.7	296.9	257.9	278.5	242.5	278.5	224.1	214.6	170.9	236.6	197.3	242.8
255.9	-	271.9	-	262.4	273.4	251.3	268.2	236.6	268.2	212.0	206.5	166.8	227.8	185.2	255.9
269.0	-	251.3	-	253.5	251.3	246.9	253.5	233.7	253.5	206.1	199.5	163.1	220.5	177.5	269.0
282.2	-	231.5	-	235.9	233.7	233.7	235.9	229.3	234.4	201.7	195.8	159.5	212.4	173.1	282.2
295.3	-	215.0	-	219.4	216.8	220.5	219.0	221.2	217.2	196.2	191.4	156.7	205.0	166.1	295.3
308.4	-	199.5	-	203.9	200.6	205.0	202.8	206.1	201.7	192.9	188.5	153.2	198.4	163.1	308.4
321.5	-	186.3	-	190.0	186.7	191.1	188.1	192.2	187.8	187.0	184.8	151.0	188.1	160.6	321.5
334.6	-	172.3	-	176.0	172.7	177.1	173.8	178.6	174.2	177.8	177.5	148.8	176.7	158.7	334.6
347.8	-	157.6	-	162.0	158.7	163.1	159.8	165.3	160.9	165.3	166.4	146.6	164.2	156.5	347.8
354.3	-	149.9	-	154.7	151.4	155.8	152.1	157.6	154.0	158.4	159.8	145.9	157.6	154.0	354.3
360.9	-	142.7	-	147.3	144.0	148.4	-	149.9	147.0	151.4	153.2	145.1	151.0	151.4	360.9
374.0	-	128.6	-	133.4	129.7	134.5	-	-	133.4	137.8	140.0	140.0	138.2	142.6	374.0
380.6	-	121.6	-	126.8	122.7	127.9	-	-	126.8	131.2	133.4	135.6	131.9	136.5	380.6
387.1	-	114.6	-	120.2	115.7	121.3	-	-	120.2	124.6	126.8	-	125.7	130.1	387.1
400.3	-	101.6	-	106.9	102.5	107.9	-	-	107.7	112.5	114.1	-	113.6	118.3	400.3
406.8	-	96.3	-	100.3	96.8	101.2	-	-	101.4	106.5	107.8	-	107.6	112.4	406.8
410.1	-	94.5	-	97.8	-	98.3	-	-	98.4	103.5	104.8	-	104.7	109.5	410.1
413.4	-	92.6	-	96.0	-	-	-	-	95.4	100.5	101.7	-	101.9	106.6	413.4
416.7	-	90.7	-	94.2	-	-	-	-	92.4	97.4	98.7	-	99.0	103.7	416.7
419.9	-	88.8	-	92.4	-	-	-	-	89.6	94.4	95.6	-	96.1	100.8	419.9
426.5	-	-	-	88.8	-	-	-	-	86.0	89.1	89.7	-	90.4	95.0	426.5
429.8	-	-	-	86.0	-	-	-	-	83.8	87.3	88.0	-	87.6	92.2	429.8
439.6	-	-	-	-	-	-	-	-	77.5	81.9	-	-	82.3	83.8	439.6
446.2	-	-	-	-	-	-	-	-	73.2	78.3	-	-	78.9	80.2	446.2
449.5	-	-	-	-	-	-	-	-	-	75.4	-	-	76.6	78.4	449.5
452.8	-	-	-	-	-	-	-	-	-	-	-	-	74.3	76.6	452.8
459.3	-	-	-	-	-	-	-	-	-	-	-	-	69.7	72.9	459.3
465.9	-	-	-	-	-	-	-	-	-	-	-	-	-	69.2	465.9
469.2	-	-	-	-	-	-	-	-	-	-	-	-	-	66.6	469.2
479.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	479.0
485.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	485.6



0 lb 176,400 lb 352,800 lb 529,200 lb 705,600 lb 882,000 lb 992,100 lb

SSL/LSL+LF, SSL/LSL S1+LF

CC 6800-1

 551,200 lb +  176,400 lb  49.2-108.3 ft  49.2-78.7 ft  31.50 ft  32.2 ft/s 360° 75%																	
           																	
452.8 ft																	
* SSL/LSL+LF ** SSL/LSL S1+LF																	
** * ** * ** * ** *																	
49.2 ft 68.9 ft 88.6 ft 108.3 ft																	
0-992.1 klb 0 lb 0 lb – 992,100 lb																	
15° 20° 30° 15° 20° 30° 15° 20° 30° 15° 20° 30°																	
ft 1,000 lb ft																	
65.6	335.1	399.0	330.7	363.8	-	-	-	-	-	-	-	-	-	-	-	-	65.6
68.9	319.1	399.0	316.4	363.2	385.8	348.3	-	-	-	-	-	-	-	-	-	-	68.9
72.2	303.1	399.0	302.0	362.7	385.8	348.3	-	-	-	-	-	-	-	-	-	-	72.2
75.5	287.2	399.0	289.4	362.1	385.8	348.3	341.7	286.6	341.7	310.9	-	-	-	-	-	-	75.5
78.7	271.2	399.0	277.8	361.6	385.8	348.3	341.7	286.6	341.7	310.9	284.4	-	288.8	262.4	-	-	78.7
85.3	246.9	399.0	253.5	359.4	385.8	346.1	339.5	285.5	341.7	308.6	284.4	-	288.8	262.4	235.9	-	85.3
88.6	234.8	399.0	241.4	358.3	385.8	345.0	338.4	284.9	341.7	307.5	284.4	240.3	288.8	262.4	235.9	-	88.6
91.9	222.7	399.0	229.3	357.1	385.8	343.9	337.3	284.4	341.7	306.4	284.4	240.3	288.8	262.4	235.9	-	91.9
95.1	212.7	398.5	219.4	355.5	385.3	342.3	336.2	283.8	341.7	304.8	283.8	239.8	288.8	261.8	235.3	-	95.1
98.4	202.8	397.9	209.4	353.8	384.7	340.6	335.1	283.3	341.7	303.1	283.3	239.2	288.8	261.2	234.8	183.0	98.4
111.5	167.0	394.6	173.6	346.1	382.5	334.0	330.7	281.1	340.6	296.5	280.0	234.8	288.8	257.9	232.6	178.0	111.5
124.7	137.2	390.2	144.4	337.3	379.2	326.3	325.2	277.8	337.3	289.9	275.6	227.1	288.8	252.4	230.4	170.9	124.7
137.8	109.3	385.8	117.0	328.5	374.8	317.5	318.9	273.4	332.9	282.9	269.7	219.0	288.6	246.2	226.3	164.6	137.8
150.9	80.9	381.4	88.6	319.7	370.4	308.6	313.1	269.0	328.5	275.6	262.4	211.6	282.2	240.3	220.5	158.7	150.9
164.0	62.8	362.3	70.5	309.4	351.3	299.8	308.6	264.6	322.6	266.8	255.0	204.3	277.8	233.0	216.1	152.9	164.0
177.2	44.8	348.3	52.6	299.1	341.7	290.3	303.5	260.1	309.4	257.9	247.7	197.7	272.6	225.6	210.9	147.7	177.2
190.3	26.9	337.3	34.8	288.8	328.5	280.0	297.6	255.7	297.6	249.1	240.3	191.8	266.8	218.3	205.0	143.3	190.3
203.4	11.9	327.4	20.6	271.2	321.9	262.4	293.2	252.8	289.9	240.3	231.5	186.7	256.5	211.6	198.4	138.9	203.4
210.0	-	319.7	13.4	264.6	317.5	257.9	291.0	251.3	284.4	235.9	227.1	184.1	251.3	208.3	195.1	136.7	210.0
216.5	-	315.3	-	259.4	307.9	254.3	288.8	242.5	277.0	230.4	224.9	181.9	248.4	205.0	192.4	134.9	216.5
229.7	-	306.4	-	249.1	302.0	246.9	284.4	235.9	271.2	218.3	218.3	176.4	242.5	197.3	186.3	131.2	229.7
242.8	-	287.3	-	239.6	285.9	234.4	278.5	225.6	260.9	211.6	205.8	172.7	230.0	191.4	180.4	127.5	242.8
255.9	-	266.8	-	230.8	267.5	227.8	266.8	218.3	254.3	203.5	199.9	168.7	224.5	180.6	174.2	124.2	255.9
269.0	-	244.7	-	224.9	246.9	220.5	249.1	213.8	246.9	196.2	194.0	164.2	219.4	174.2	167.6	121.3	269.0
282.2	-	227.1	-	219.7	227.6	215.3	229.3	208.3	229.3	190.7	185.2	161.5	213.8	169.0	160.4	118.3	282.2
295.3	-	210.2	-	211.6	211.6	209.7	212.7	203.9	212.4	185.2	180.8	158.4	207.2	161.3	156.5	115.7	295.3
308.4	-	194.0	-	200.6	196.2	201.7	197.3	197.3	196.2	180.8	176.4	155.4	198.4	157.6	152.1	113.5	308.4
321.5	-	180.0	-	186.7	181.5	187.8	183.4	187.0	181.5	176.4	172.7	152.5	184.5	154.7	148.1	111.3	321.5
334.6	-	166.4	-	173.4	167.2	174.2	169.4	175.6	167.9	170.1	168.3	149.9	171.2	152.1	145.9	109.6	334.6
347.8	-	152.1	-	160.9	153.2	160.9	155.4	163.1	155.4	162.0	163.1	147.7	158.7	149.9	144.4	108.0	347.8
360.9	-	138.2	-	147.0	139.4	147.7	141.1	149.2	142.2	149.5	150.6	145.5	145.5	147.7	141.5	106.4	360.9
367.5	-	131.2	-	140.0	132.3	141.1	134.5	142.2	135.6	143.3	144.4	144.4	138.9	146.6	140.0	105.6	367.5
374.0	-	124.6	-	133.4	125.7	134.5	-	135.6	129.0	136.9	137.8	140.0	132.6	141.1	138.5	105.0	374.0
387.1	-	111.3	-	120.2	112.4	121.3	-	-	115.7	124.6	125.7	127.9	120.2	127.9	130.1	103.6	387.1
393.7	-	105.3	-	114.1	106.3	115.1	-	-	109.9	118.6	119.8	122.4	114.6	122.4	124.2	103.2	393.7
400.3	-	99.3	-	108.0	100.2	108.9	-	-	104.1	112.7	113.9	-	109.1	116.8	118.3	102.7	400.3
413.4	-	87.2	-	95.8	88.1	96.7	-	-	92.7	101.0	102.3	-	98.1	105.9	107.2	101.9	413.4
419.9	-	82.3	-	89.8	82.7	90.7	-	-	87.0	95.2	96.6	-	92.6	100.5	102.0	-	419.9
426.5	-	78.7	-	84.9	-	85.3	-	-	81.4	89.5	90.8	-	87.1	95.0	96.8	-	426.5
433.1	-	74.1	-	81.2	-	-	-	-	75.9	84.0	85.2	-	81.8	89.7	91.5	-	433.1
439.6	-	69.6	-	77.5	-	-	-	-	72.7	78.5	79.7	-	76.5	84.4	86.2	-	439.6
446.2	-	65.0	-	73.9	-	-	-	-	69.4	75.2	75.8	-	72.5	79.1	80.9	-	446.2
452.8	-	-	-	-	-	-	-	-	65.1	71.4	-	-	68.9	74.1	75.7	-	452.8
459.3	-	-	-	-	-	-	-	-	60.8	67.7	-	-	65.3	70.3	71.0	-	459.3
462.6	-	-	-	-	-	-	-	-	-	65.8	-	-	63.5	68.7	69.4	-	462.6
465.9	-	-	-	-	-	-	-	-	63.9	-	-	-	61.7	67.2	-	-	465.9
479.0	-	-	-	-	-	-	-	-	-	-	-	-	52.7	59.6	-	-	479.0
482.3	-	-	-	-	-	-	-	-	-	-	-	-	50.3	57.7	-	-	482.3
485.6	-	-	-	-	-	-	-	-	-	-	-	-	47.8	55.8	-	-	485.6
492.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	492.1
498.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	498.7
505.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	505.3

0 lb 176,400 lb 352,800 lb 529,200 lb 705,600 lb 882,000 lb 992,100 lb

SSL/LSL+LF, SSL/LSL S1+LF

CC 6800-1

551,200 lb + 176,400 lb		49.2-108.3 ft		49.2-78.7 ft		31.50 ft		32.2 ft/s		360°		75%											
472.4 ft																							
* SSL/LSL+LF							** SSL/LSL S1+LF																
**				*		**		*		**		*											
49.2 ft				68.9 ft				88.6 ft				108.3 ft											
0 lb		992.1 klb		0 lb		0 lb – 992,100 lb																	
15°		20°		30°		15°		20°		30°		15°											
15°		20°		30°		15°		20°		30°		15°											
1,000 lb																							
65.6	321.9	370.4	297.6	315.3	-	-	-	-	-	-	-	-	65.6										
72.2	289.9	370.4	276.7	314.2	359.4	299.8	-	-	-	-	-	-	72.2										
78.7	257.9	370.4	271.2	313.1	359.4	299.8	332.9	273.4	319.7	266.8	249.1	-	78.7										
85.3	234.2	369.3	246.9	309.7	358.3	296.5	331.8	272.3	319.7	264.6	249.1	-	85.3										
88.6	222.4	368.7	234.8	308.1	357.7	294.9	331.2	271.7	319.7	263.5	249.1	220.5	88.6										
91.9	210.5	368.2	222.7	306.4	357.1	293.2	330.7	271.2	319.7	262.4	249.1	220.5	91.9										
95.1	200.9	367.6	213.0	304.2	356.6	291.6	329.6	269.5	319.1	260.7	247.5	220.2	95.1										
98.4	191.3	367.1	203.4	302.0	356.0	289.9	328.5	267.9	318.6	259.0	245.8	219.9	98.4										
101.7	181.6	366.5	193.7	299.8	355.5	288.3	327.4	266.2	318.0	257.4	244.2	219.6	101.7										
111.5	156.5	364.9	168.7	293.2	353.8	282.2	324.1	261.2	315.3	251.3	239.2	216.6	111.5										
124.7	127.9	361.6	140.0	284.4	350.5	273.4	319.7	254.6	312.0	243.6	232.6	211.1	124.7										
137.8	100.9	356.4	113.4	274.8	346.1	264.6	314.5	246.9	308.6	235.9	225.6	205.4	137.8										
150.9	73.4	350.5	86.6	264.6	341.7	255.7	308.6	238.1	304.2	227.1	218.3	199.5	150.9										
164.0	55.2	335.8	68.6	254.3	335.8	246.9	304.2	230.8	298.4	219.0	210.9	193.6	164.0										
177.2	37.0	328.5	50.6	244.7	321.1	238.1	299.8	223.8	290.3	211.3	203.6	187.8	177.2										
190.3	19.0	319.7	32.8	235.9	315.3	229.3	295.4	217.2	280.0	203.9	196.2	181.9	190.3										
196.9	11.2	312.3	25.6	230.6	303.5	225.2	293.2	213.5	277.0	200.3	192.5	178.9	196.9										
203.4	-	309.4	18.4	225.3	300.6	221.2	286.6	209.8	274.1	196.6	188.9	176.0	203.4										
210.0	-	306.4	11.2	220.5	297.6	217.2	284.4	206.1	271.2	192.9	185.2	173.1	210.0										
216.5	-	296.2	-	216.8	289.5	213.1	281.5	203.3	261.6	189.2	182.5	170.9	216.5										
229.7	-	288.8	-	209.4	282.2	205.0	275.6	196.2	255.7	181.9	176.4	165.3	229.7										
242.8	-	277.0	-	195.8	274.8	192.9	265.3	190.3	245.4	176.0	170.5	160.9	242.8										
255.9	-	260.1	-	188.9	260.9	186.3	255.7	179.9	240.3	169.4	164.8	156.2	255.9										
269.0	-	238.1	-	181.9	240.3	179.7	242.5	174.2	235.9	159.8	158.7	151.0	269.0										
282.2	-	220.5	-	174.6	221.9	172.0	224.1	169.0	220.5	154.7	151.0	145.9	282.2										
295.3	-	203.6	-	169.8	204.7	167.6	206.9	162.4	204.7	149.9	146.6	140.4	295.3										
308.4	-	187.4	-	165.3	188.5	163.1	190.7	158.7	188.5	145.5	142.2	136.7	308.4										
321.5	-	172.7	-	162.4	173.8	160.2	176.0	155.8	174.5	141.5	138.2	133.7	321.5										
334.6	-	158.7	-	159.1	159.8	157.3	162.0	153.2	160.9	138.5	135.6	130.4	334.6										
347.8	-	145.5	-	155.4	146.6	154.3	148.8	151.0	147.7	135.6	133.4	129.0	347.8										
360.9	-	131.5	-	145.7	133.4	146.4	134.8	145.1	134.5	132.6	130.4	126.8	360.9										
374.0	-	118.6	-	133.7	120.4	134.8	121.3	136.0	122.0	128.6	127.9	124.6	374.0										
380.6	-	112.7	-	127.5	114.1	128.6	114.6	129.7	116.1	126.0	126.8	124.0	380.6										
387.1	-	106.7	-	121.3	107.8	122.4	-	123.5	110.2	123.5	125.7	123.5	387.1										
400.3	-	94.8	-	109.3	95.8	110.5	-	-	98.8	112.6	114.2	114.6	400.3										
406.8	-	88.8	-	103.4	89.7	104.5	-	-	93.0	107.1	108.5	110.2	406.8										
413.4	-	83.2	-	97.8	84.1	98.8	-	-	87.7	101.7	103.0	-	413.4										
426.5	-	71.9	-	86.6	72.8	87.3	-	-	76.9	90.8	92.2	-	426.5										
433.1	-	68.3	-	81.1	69.0	81.8	-	-	71.7	85.6	86.9	-	433.1										
439.6	-	65.0	-	75.8	-	76.4	-	-	66.4	80.4	81.7	-	439.6										
442.9	-	63.4	-	74.2	-	74.5	-	-	64.6	77.8	79.1	-	442.9										
446.2	-	61.7	-	72.5	-	-	-	-	63.1	75.2	76.5	-	446.2										
452.8	-	56.7	-	69.1	-	-	-	-	59.2	70.1	71.3	-	452.8										
459.3	-	51.6	-	65.7	-	-	-	-	55.4	67.3	67.5	-	459.3										
462.6	-	-	-	63.9	-	-	-	-	53.5	66.0	-	-	462.6										
465.9	-	-	-	-	-	-	-	-	51.6	64.6	-	-	465.9										
472.4	-	-	-	-	-	-	-	-	47.4	60.5	-	-	472.4										
479.0	-	-	-	-	-	-	-	-	-	56.5	-	-	479.0										
482.3	-	-	-	-	-	-	-	-	-	54.5	-	-	482.3										
492.1	-	-	-	-	-	-	-	-	-	-	-	-	492.1										
498.7	-	-	-	-	-	-	-	-	-	-	-	-	498.7										
502.0	-	-	-	-	-	-	-	-	-	-	-	-	502.0										
511.8	-	-	-	-	-	-	-	-	-	-	-	-	511.8										
518.4	-	-	-	-	-	-	-	-	-	-	-	-	518.4										
521.7	-	-	-	-	-	-	-	-	-	-	-	-	521.7										




SSL/LSL+LF, SSL/LSL S1+LF

CC 6800-1

551,200 lb + 176,400 lb		49.2-108.3 ft		49.2-78.7 ft		31.50 ft		32.2 ft/s		360°		75%											
492.1 ft																							
* SSL/LSL+LF							** SSL/LSL S1+LF																
**				*		**		*		**		*											
49.2 ft				68.9 ft				88.6 ft				108.3 ft											
0 lb		992.1 klb		0 lb		0 lb - 992,100 lb																	
15°		20°		30°		15°		20°		30°		15°											
15°		20°		30°		15°		20°		30°		15°											
1,000 lb																							
ft													ft										
68.9	291.0	341.7	262.4	280.0	-	-	-	-	-	-	-	-	68.9										
72.2	276.3	341.0	256.5	279.3	330.7	269.0	-	-	-	-	-	-	72.2										
75.5	261.6	340.2	252.8	278.5	330.7	269.0	-	-	-	-	-	-	75.5										
78.7	246.9	339.5	251.3	277.8	330.7	269.0	302.0	246.9	295.4	238.1	-	-	78.7										
82.0	235.3	339.5	241.1	276.1	330.1	267.3	302.0	246.4	294.9	237.5	227.1	-	82.0										
85.3	223.8	339.5	230.9	274.5	329.6	265.7	302.0	245.8	294.3	237.0	226.3	-	85.3										
88.6	212.2	339.5	222.9	272.8	329.0	264.0	302.0	245.3	293.8	236.4	225.6	-	88.6										
91.9	200.6	339.5	215.0	271.2	328.5	262.4	302.0	244.7	293.2	235.9	224.9	187.4	91.9										
98.4	181.3	338.4	196.2	266.8	327.4	259.0	300.9	241.4	292.1	232.6	222.1	187.4	98.4										
101.7	171.7	337.9	186.8	264.6	326.8	257.4	300.4	239.8	291.6	230.9	220.7	187.4	101.7										
111.5	146.6	335.1	162.0	257.9	325.2	251.3	298.7	234.8	289.9	226.0	216.6	186.3	111.5										
114.8	138.9	334.0	154.3	255.7	324.6	249.1	298.2	233.1	289.4	224.3	215.2	185.7	114.8										
124.7	118.5	331.8	133.9	249.1	323.0	242.5	295.4	228.2	287.7	219.4	210.5	184.6	124.7										
137.8	92.7	328.5	108.5	239.6	319.7	233.7	291.0	220.8	284.4	211.6	203.6	182.6	137.8										
150.9	66.6	324.1	83.1	229.3	315.3	224.9	286.6	212.7	280.0	202.8	196.2	179.7	150.9										
164.0	48.4	318.2	65.0	220.5	310.9	215.3	283.7	204.7	275.6	194.7	188.1	173.8	164.0										
177.2	30.2	305.3	47.0	211.3	297.6	206.1	280.0	196.9	271.2	186.7	180.4	167.9	177.2										
190.3	12.1	299.8	29.1	201.7	293.2	197.3	275.6	189.6	266.8	178.6	173.1	162.0	190.3										
203.4	-	287.3	14.3	194.0	280.7	189.4	271.2	182.2	254.3	171.5	166.4	156.2	203.4										
216.5	-	278.5	-	185.6	274.1	181.5	261.6	174.9	245.4	163.9	159.8	151.0	216.5										
229.7	-	269.0	-	177.5	266.8	174.2	255.7	167.6	238.1	156.5	153.2	145.5	229.7										
242.8	-	261.6	-	170.9	256.5	167.6	246.9	161.7	233.7	150.6	147.3	140.4	242.8										
255.9	-	253.5	-	163.1	251.3	160.5	242.5	155.8	224.9	144.4	141.5	135.0	255.9										
269.0	-	231.5	-	154.3	233.7	154.3	235.9	149.9	220.5	138.9	135.6	130.1	269.0										
282.2	-	213.8	-	148.4	215.3	145.9	218.3	141.5	210.9	133.7	130.4	125.7	282.2										
295.3	-	196.9	-	143.3	198.0	141.1	201.0	137.1	198.0	126.2	124.8	121.6	295.3										
308.4	-	180.8	-	138.9	181.9	136.7	184.1	133.4	181.9	121.3	119.0	117.9	308.4										
321.5	-	166.1	-	134.8	167.2	132.6	169.4	129.3	167.9	117.4	115.7	112.2	321.5										
334.6	-	152.1	-	131.9	153.2	129.7	155.4	126.8	154.3	114.6	112.4	109.3	334.6										
347.8	-	138.9	-	129.0	140.0	126.8	142.2	124.6	141.1	112.4	110.2	107.4	347.8										
360.9	-	125.7	-	126.0	126.8	124.2	129.0	122.4	128.6	109.8	108.2	105.2	360.9										
374.0	-	113.2	-	122.7	114.3	122.0	116.3	119.8	116.5	107.7	106.0	103.3	374.0										
387.1	-	101.4	-	119.0	102.5	119.0	104.3	116.8	104.7	105.2	103.6	101.4	387.1										
393.7	-	95.5	-	113.5	96.6	113.8	98.3	113.1	99.0	104.0	102.5	100.5	393.7										
400.3	-	89.8	-	107.9	90.9	108.5	-	109.3	93.5	102.8	101.4	99.5	400.3										
403.5	-	87.0	-	105.1	88.1	105.8	-	107.4	90.7	102.2	100.9	99.0	403.5										
413.4	-	78.9	-	96.9	79.9	97.8	-	-	82.7	97.6	97.2	97.6	413.4										
419.9	-	73.5	-	91.6	74.4	92.4	-	-	77.5	93.5	94.0	96.6	419.9										
426.5	-	68.1	-	86.2	69.0	87.1	-	-	72.3	89.5	90.8	-	426.5										
439.6	-	58.2	-	75.8	58.8	76.6	-	-	62.3	79.6	80.7	-	439.6										
452.8	-	50.7	-	66.5	51.3	66.9	-	-	52.5	70.0	71.1	-	452.8										
459.3	-	47.0	-	64.0	47.6	64.4	-	-	48.7	65.2	66.3	-	459.3										
465.9	-	43.2	-	61.5	-	-	-	-	45.2	61.5	62.2	-	465.9										
472.4	-	39.0	-	57.1	-	-	-	-	41.8	58.7	59.4	-	472.4										
475.7	-	-	-	54.9	-	-	-	-	40.1	57.3	58.0	-	475.7										
479.0	-	-	-	52.5	-	-	-	-	38.4	55.7	-	-	479.0										
482.3	-	-	-	50.0	-	-	-	-	36.7	54.1	-	-	482.3										
492.1	-	-	-	-	-	-	-	-	30.6	48.1	-	-	492.1										
495.4	-	-	-	-	-	-	-	-	28.4	45.9	-	-	495.4										
498.7	-	-	-	-	-	-	-	-	26.2	43.7	-	-	498.7										
511.8	-	-	-	-	-	-	-	-	-	-	-	-	511.8										
515.1	-	-	-	-	-	-	-	-	-	-	-	-	515.1										
518.4	-	-	-	-	-	-	-	-	-	-	-	-	518.4										
531.5	-	-	-	-	-	-	-	-	-	-	-	-	531.5										
538.1	-	-	-	-	-	-	-	-	-	-	-	-	538.1										

0 lb 176,400 lb 352,800 lb 529,200 lb 705,600 lb 882,000 lb 992,100 lb

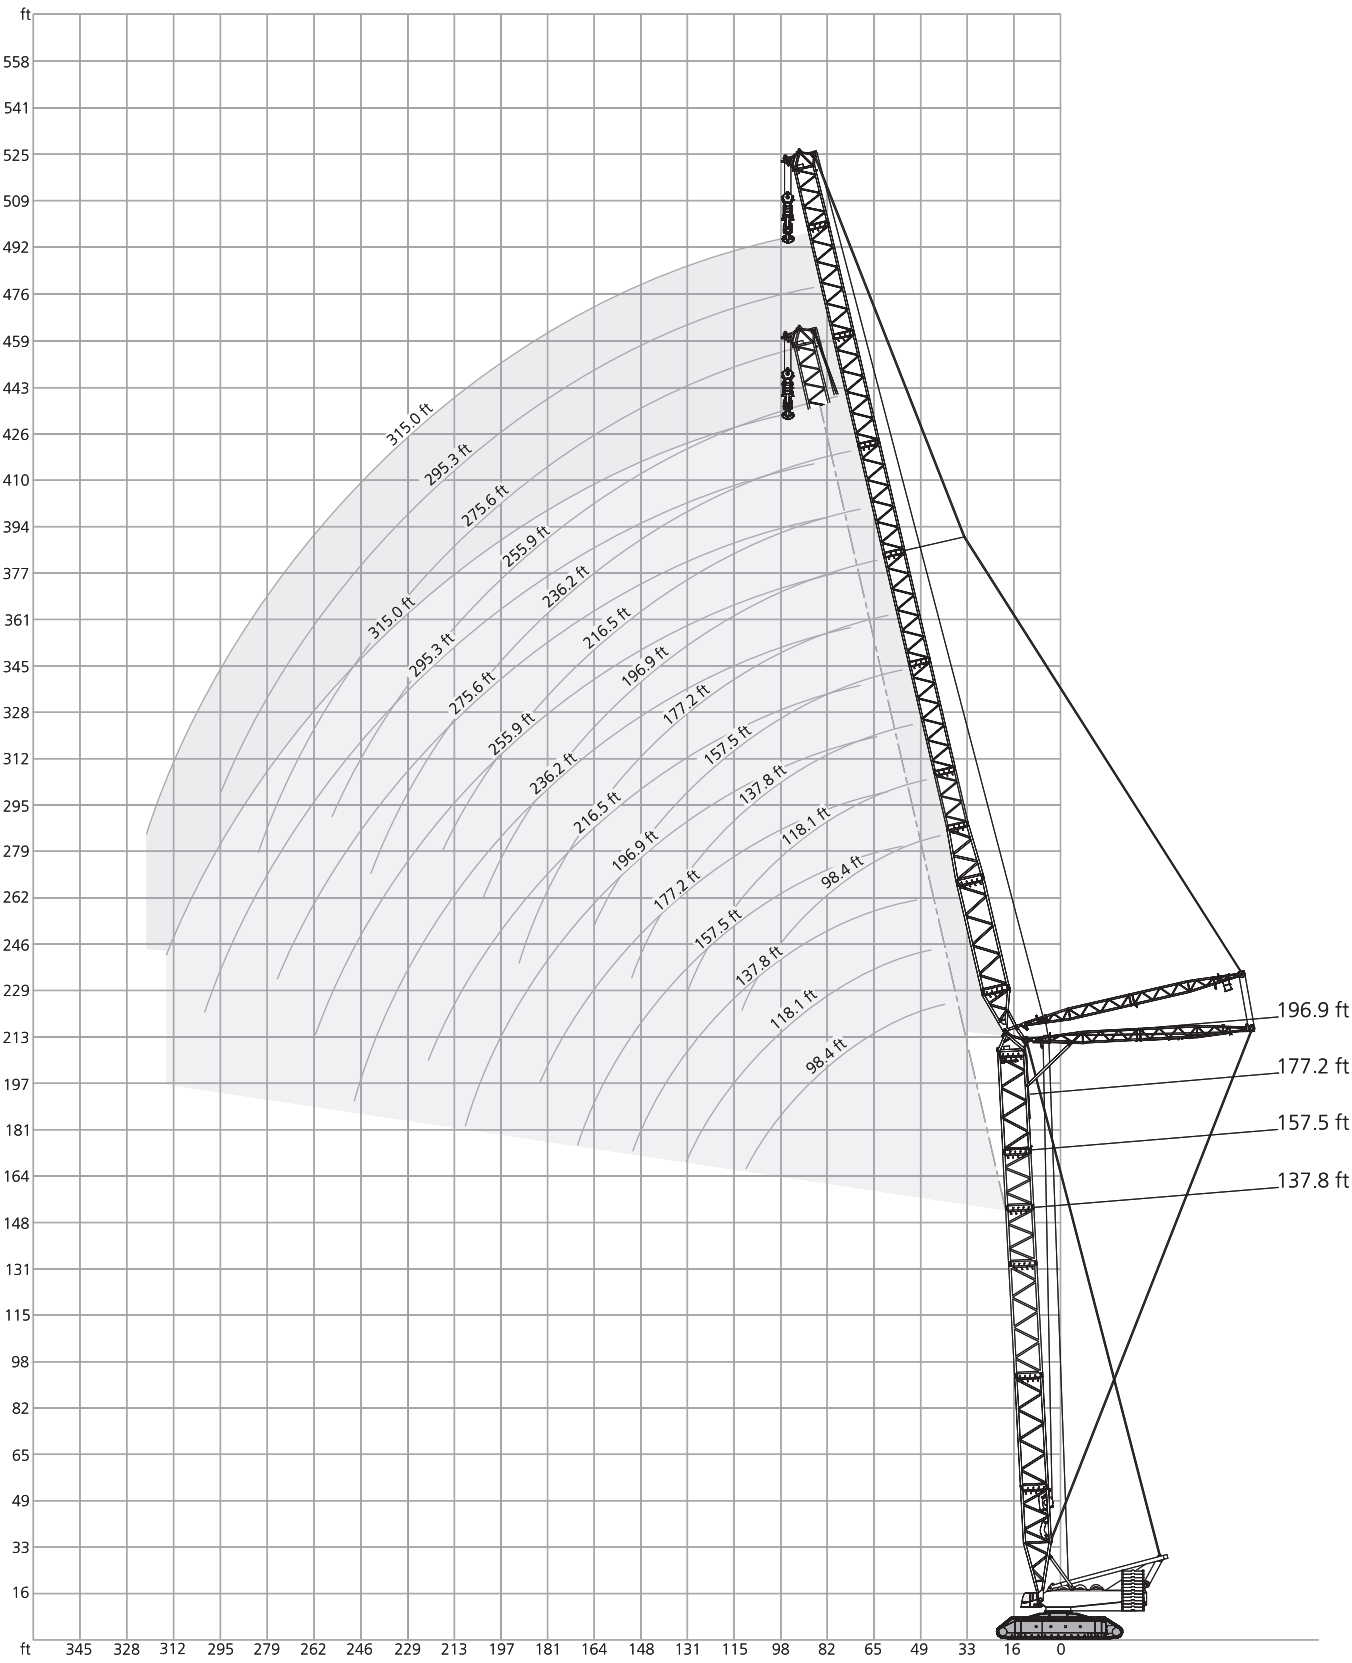

374,800 – 551,200 lb +  0–176,400 lb										 31.50 ft			 32.2 ft/s			360°		75%	
 137.8 ft																			
		98.4 ft			118.1 ft			137.8 ft			157.5 ft			177.2 ft			196.9 ft		
		 87°/85°	75°	65°	 87°/85°	75°	65°	 87°/85°	75°	65°	 87°/85°	75°	65°	 87°/85°	75°	65°	 87°/85°	75°	65°
ft							1,000 lb												
45.9	747.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
49.2	698.9	-	-	672.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
52.5	654.8	-	-	630.5	-	-	610.7	-	-	-	-	-	-	-	-	-	-	-	-
59.1	584.2	-	-	564.4	-	-	544.5	-	-	526.9	-	-	-	-	-	-	-	-	-
62.3	553.4	-	-	533.5	-	-	518.1	-	-	500.4	-	-	485.0	-	-	-	-	-	-
65.6	524.7	-	-	507.1	-	-	491.6	-	-	476.2	-	-	460.8	-	-	-	445.3	-	-
72.2	478.4	-	-	460.8	-	-	447.5	-	-	434.3	-	-	421.1	-	-	-	405.7	-	-
78.7	436.5	-	-	423.3	-	-	410.1	-	-	396.8	-	-	385.8	-	-	-	372.6	-	-
85.3	403.4	-	-	390.2	-	-	379.2	-	-	366.0	-	-	354.9	-	-	-	343.9	-	-
91.9	366.0	319.7	-	361.6	-	-	350.5	-	-	339.5	-	-	330.7	-	-	-	319.7	-	-
98.4	332.9	291.0	-	332.9	-	-	326.3	-	-	315.3	-	-	306.4	-	-	-	297.6	-	-
105.0	304.2	264.6	-	304.2	262.4	-	304.2	-	-	295.4	-	-	286.6	-	-	-	277.8	-	-
111.5	280.0	244.7	-	280.0	242.5	-	280.0	240.3	-	275.6	-	-	269.0	-	-	-	260.1	-	-
118.1	-	224.9	-	260.1	222.7	-	257.9	220.5	-	255.7	217.2	-	251.3	-	-	-	244.7	-	-
124.7	-	209.4	-	240.3	207.2	-	240.3	206.1	-	235.9	200.6	-	235.9	197.3	-	-	229.3	-	-
131.2	-	195.1	170.9	219.4*	192.9	-	224.9	191.8	-	220.5	186.3	-	219.4	185.2	-	-	217.2	-	-
137.8	-	183.0	158.7	-	180.8	-	209.4	178.6	-	206.1	174.2	-	205.0	172.0	-	-	205.0	167.6	-
144.4	-	-	148.8	-	168.7	145.5	197.3	167.6	-	194.0	163.1	-	191.8	160.9	-	-	191.8	157.6	-
150.9	-	-	140.0	-	158.7	136.7	180.8*	156.5	-	181.9	152.1	-	180.8	151.0	-	-	179.7	148.8	-
157.5	-	-	131.2	-	149.9	129.0	-	147.7	125.7	170.9	143.3	-	169.8	141.1	-	-	169.8	140.0	-
164.0	-	-	123.5	-	-	121.3	-	138.9	117.9	162.0	134.5	112.4	159.8	133.4	-	-	159.8	131.2	-
177.2	-	-	-	-	-	107.4	-	124.6	104.7	-	120.2	99.0	143.3	117.9	96.1	-	142.2	116.8	-
190.3	-	-	-	-	-	-	-	-	93.3	-	108.2	87.5	125.7*	106.3	84.9	-	127.9	104.9	82.7
203.4	-	-	-	-	-	-	-	-	-	-	-	77.8	-	95.5	75.2	-	115.7	93.7	73.0
216.5	-	-	-	-	-	-	-	-	-	-	-	69.7	-	86.0	66.8	-	-	83.8	64.6
229.7	-	-	-	-	-	-	-	-	-	-	-	-	-	59.5	-	-	-	75.4	57.1
242.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	50.7
255.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	45.0

216.5 ft				236.2 ft				255.9 ft				275.6 ft				295.3 ft				315.0 ft			
[87°/85°] [75°] [65°]				[87°/85°] [75°] [65°]				[87°/85°] [75°] [65°]				[87°/85°] [75°] [65°]				[87°/85°] [75°] [65°]				[87°/85°] [75°] [65°]			
ft								1,000 lb															
72.2	392.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
78.7	359.4	-	-	348.3	-	-	339.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
85.3	332.9	-	-	321.9	-	-	313.1	-	-	302.0	-	-	-	-	-	-	-	-	-	-	-	-	-
91.9	308.6	-	-	297.6	-	-	291.0	-	-	280.0	-	-	273.4	-	-	-	-	-	-	251.3	-	-	-
98.4	286.6	-	-	277.8	-	-	271.2	-	-	260.1	-	-	253.5	-	-	-	-	-	-	244.7	-	-	-
111.5	249.1	-	-	242.5	-	-	235.9	-	-	227.1	-	-	220.5	-	-	-	-	-	-	213.8	-	-	-
124.7	220.5	-	-	213.8	-	-	208.3	-	-	200.6	-	-	195.1	-	-	-	-	-	-	187.4	-	-	-
137.8	196.2	-	-	189.6	-	-	185.2	-	-	178.6	-	-	173.1	-	-	-	-	-	-	166.4	-	-	-
144.4	186.3	148.8	-	179.7	-	-	175.3	-	-	168.7	-	-	163.1	-	-	-	-	-	-	156.5	-	-	-
150.9	176.4	141.1	-	169.8	134.5	-	165.3	-	-	158.7	-	-	154.3	-	-	-	-	-	-	147.7	-	-	-
164.0	156.5	125.7	-	153.2	119.0	-	148.8	115.7	-	142.2	-	-	137.8	-	-	-	-	-	-	132.3	-	-	-
177.2	140.0	113.5	-	136.7	107.4	-	134.5	103.6	-	127.9	97.2	-	124.6	93.0	-	-	-	-	-	117.9	-	-	-
190.3	125.7	101.2	-	122.4	96.3	-	121.3	93.0	-	115.7	86.6	-	112.4	82.7	-	-	-	-	-	106.5	76.5	-	-
203.4	112.4	89.9	68.8	110.2	85.8	-	109.1	83.6	-	105.4	77.4	-	101.6	73.6	-	-	-	-	-	95.9	67.5	-	-
216.5	102.5	80.0	60.4	99.6	75.8	55.8	98.3	73.9	-	95.7	69.2	-	91.9	65.5	-	-	-	-	-	86.4	59.5	-	-
229.7	89.7*	71.4	52.9	90.2	67.5	48.5	88.8	65.5	46.1	86.4	61.7	-	83.6	58.2	-	-	-	-	-	78.0	52.5	-	-
242.8	-	63.9	46.5	82.0	59.7	41.9	80.7	58.0	39.7	77.6	54.5	35.7	75.6	51.8	32.8	-	-	-	-	70.5	46.1	-	-
255.9	-	-	40.8	-	53.1	36.2	73.0	51.1	34.0	69.9	47.6	30.0	67.7	45.2	27.3	-	-	-	-	63.5	40.3	22.3	-
269.0	-	-	35.5	-	47.2	31.1	62.4*	45.4	28.9	62.8	41.7	25.1	60.6	39.2	22.3	-	-	-	-	57.3	35.1	17.6	-
282.2	-	-	-	-	-	26.7	-	40.1	24.5	56.4	36.4	20.5	54.2	34.0	17.9	-	-	-	-	51.4	30.2	13.4	-
295.3	-	-	-	-	-	22.7	-	-	20.3	-	31.7	16.5	48.5	29.1	13.7	-	-	-	-	45.4	25.8	-	-
308.4	-	-	-	-	-	-	-	-	16.8	-	27.3	12.8	-	24.9	-	-	-	-	-	40.3	21.4	-	-
321.5	-	-	-	-	-	-	-	-	-	-	-	-	-	20.9	-	-	-	-	-	32.6*	17.4	-	-
334.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	13.9	-	-

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

* Main boom angle 85°

374,800 – 551,200 lb +  0–176,400 lb										 31.50 ft				 32.2 ft/s				360°		75%	
 157.5 ft																					
		98.4 ft			118.1 ft			137.8 ft			157.5 ft			177.2 ft			196.9 ft				
		87°/85°	75°	65°	87°/85°	75°	65°	87°/85°	75°	65°	87°/85°	75°	65°	87°/85°	75°	65°	87°/85°	75°	65°		
ft							1,000 lb														
45.9	714.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
49.2	670.2	-	-	643.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
52.5	630.5	-	-	606.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
55.8	595.2	-	-	573.2	-	-	553.4	-	-	-	-	-	-	-	-	-	-	-	-		
59.1	562.2	-	-	542.3	-	-	524.7	-	-	507.1	-	-	-	-	-	-	-	-	-		
62.3	533.5	-	-	515.9	-	-	498.2	-	-	482.8	-	-	467.4	-	-	-	-	-	-		
65.6	507.1	-	-	489.4	-	-	474.0	-	-	458.6	-	-	445.3	-	-	-	-	-	-		
72.2	460.8	-	-	445.3	-	-	432.1	-	-	418.9	-	-	405.7	-	-	392.4	-	-	-		
78.7	423.3	-	-	410.1	-	-	396.8	-	-	383.6	-	-	372.6	-	-	361.6	-	-	-		
85.3	390.2	-	-	377.0	-	-	366.0	-	-	354.9	-	-	343.9	-	-	332.9	-	-	-		
91.9	361.6	-	-	350.5	-	-	339.5	-	-	328.5	-	-	319.7	-	-	308.6	-	-	-		
98.4	330.7	277.8	-	326.3	-	-	317.5	-	-	306.4	-	-	297.6	-	-	286.6	-	-	-		
105.0	304.2	255.7	-	304.2	249.1	-	295.4	-	-	286.6	-	-	277.8	-	-	269.0	-	-	-		
111.5	280.0	235.9	-	280.0	233.7	-	277.8	-	-	269.0	-	-	260.1	-	-	251.3	-	-	-		
118.1	251.3*	218.3	-	257.9	216.1	-	257.9	211.6	-	253.5	-	-	244.7	-	-	235.9	-	-	-		
124.7	-	201.7	-	240.3	199.5	-	238.1	197.3	-	235.9	190.7	-	231.5	-	-	222.7	-	-	-		
131.2	-	188.5	-	222.7	186.3	-	222.7	184.1	-	219.4	179.7	-	218.3	173.1	-	210.5	-	-	-		
137.8	-	175.3	147.7	-	173.1	-	208.3	172.0	-	205.0	166.4	-	203.9	163.1	-	199.5	155.4	-	-		
144.4	-	164.2	137.8	-	162.0	-	195.1	160.9	-	191.8	155.4	-	190.7	154.3	-	188.5	146.6	-	-		
150.9	-	-	127.9	-	152.1	124.6	184.1	151.0	-	180.8	145.5	-	179.7	144.4	-	178.6	137.8	-	-		
164.0	-	-	112.4	-	135.6	109.8	-	133.4	106.9	160.9	129.0	-	158.7	126.8	-	158.7	123.5	-	-		
177.2	-	-	-	-	-	97.0	-	119.0	94.1	-	114.6	88.2	142.2	112.4	-	142.2	111.3	-	-		
190.3	-	-	-	-	-	86.2	-	-	83.3	-	102.7	77.4	123.5*	100.3	74.7	126.8	99.0	-	-		
203.4	-	-	-	-	-	-	-	-	74.1	-	-	68.3	-	89.5	65.7	114.6	88.0	63.5	-		
216.5	-	-	-	-	-	-	-	-	-	-	-	60.6	-	80.2	57.8	-	78.5	55.8	-		
229.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	51.1	-	70.3	48.9	-		
242.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	45.2	-	-	42.8	-		
255.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	37.5	-		

216.5 ft				236.2 ft				255.9 ft				275.6 ft				295.3 ft			
87°/85° 75° 65°				87°/85° 75° 65°				87°/85° 75° 65°				87°/85° 75° 65°				87°/85° 75° 65°			
ft								1,000 lb											
72.2	379.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
78.7	348.3	-	-	337.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
85.3	321.9	-	-	310.9	-	-	302.0	-	-	293.2	-	-	-	-	-	-	-	-	-
91.9	297.6	-	-	288.8	-	-	280.0	-	-	271.2	-	-	264.6	-	-	-	-	-	-
98.4	277.8	-	-	269.0	-	-	262.4	-	-	251.3	-	-	244.7	-	-	235.9	-	-	-
111.5	242.5	-	-	233.7	-	-	229.3	-	-	220.5	-	-	215.0	-	-	206.1	-	-	-
124.7	213.8	-	-	207.2	-	-	201.7	-	-	194.0	-	-	188.5	-	-	181.9	-	-	-
137.8	190.7	-	-	184.1	-	-	179.7	-	-	172.0	-	-	167.6	-	-	160.9	-	-	-
150.9	170.9	130.1	-	164.2	-	-	160.9	-	-	153.2	-	-	148.8	-	-	142.2	-	-	-
157.5	162.0	122.4	-	156.5	115.7	-	152.1	-	-	145.5	-	-	141.1	-	-	134.5	-	-	-
164.0	154.3	115.7	-	147.7	109.8	-	144.4	105.8	-	137.8	-	-	133.4	-	-	126.8	-	-	-
177.2	138.9	104.3	-	133.4	98.1	-	130.1	94.4	-	124.6	87.7	-	120.2	-	-	113.5	-	-	-
190.3	124.6	93.7	-	121.3	87.7	-	117.9	84.2	-	112.4	77.8	-	108.7	73.9	-	102.7	67.7	-	-
203.4	112.4	84.2	-	109.8	78.7	-	107.6	75.4	-	101.9	69.2	-	98.1	65.3	-	92.4	59.3	-	-
216.5	101.9	74.7	51.6	99.0	70.5	46.7	97.7	67.5	-	92.4	61.3	-	88.8	57.8	-	83.1	51.8	-	-
229.7	88.6*	66.6	44.5	89.5	62.2	39.9	88.2	60.2	37.5	84.0	54.5	-	80.5	50.9	-	75.0	45.2	-	-
242.8	-	59.1	38.6	81.4	55.1	34.0	79.8	52.9	31.5	76.3	48.3	26.7	73.0	44.8	-	67.5	39.0	-	-
255.9	-	52.7	33.3	-	48.5	28.7	72.1	46.5	26.2	69.0	42.5	21.8	66.1	39.2	-	60.8	33.5	-	-
269.0	-	-	28.4	-	42.8	23.8	61.1*	40.8	21.6	61.9	37.3	17.6	59.7	34.2	-	54.7	28.7	-	-
282.2	-	-	24.3	-	-	19.6	-	35.7	17.4	55.8	32.2	13.4	53.6	29.5	-	49.2	24.0	-	-
295.3	-	-	-	-	-	15.9	-	31.3	13.7	-	27.6	-	47.8	25.1	-	44.1	19.8	-	-
308.4	-	-	-	-	-	-	-	-	-	-	23.4	-	39.0*	20.9	-	39.5	16.1	-	-
321.5	-	-	-	-	-	-	-	-	-	-	-	-	-	17.2	-	35.1	12.6	-	-
334.6	-	-	-	-	-	-	-	-	-	-	-	-	-	13.9	-	-	-	-	-

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

* Main boom angle 85°

374,800 – 551,200 lb +  0–176,400 lb										 31.50 ft				 32.2 ft/s				360°		75%			
 177.2 ft																							
 98.4 ft				118.1 ft				137.8 ft				157.5 ft				177.2 ft				196.9 ft			
  [87°/85°] [75°] [65°]				  [87°/85°] [75°] [65°]				  [87°/85°] [75°] [65°]				  [87°/85°] [75°] [65°]				  [87°/85°] [75°] [65°]				  [87°/85°] [75°] [65°]			
ft								1,000 lb															
45.9	683.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
52.5	604.1	-	-	582.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
55.8	571.0	-	-	551.2	-	-	533.5	-	-	-	-	-	-	-	-	-	-	-	-				
59.1	542.3	-	-	522.5	-	-	504.9	-	-	487.2	-	-	-	-	-	-	-	-	-				
65.6	489.4	-	-	471.8	-	-	458.6	-	-	443.1	-	-	429.9	-	-	-	-	-	-				
72.2	445.3	-	-	432.1	-	-	418.9	-	-	403.4	-	-	392.4	-	-	-	379.2	-	-				
78.7	410.1	-	-	396.8	-	-	383.6	-	-	372.6	-	-	361.6	-	-	-	348.3	-	-				
85.3	379.2	-	-	366.0	-	-	354.9	-	-	343.9	-	-	332.9	-	-	-	321.9	-	-				
91.9	350.5	-	-	339.5	-	-	330.7	-	-	319.7	-	-	308.6	-	-	-	299.8	-	-				
98.4	328.5	-	-	315.3	-	-	306.4	-	-	297.6	-	-	288.8	-	-	-	277.8	-	-				
105.0	302.0	242.5	-	295.4	-	-	286.6	-	-	277.8	-	-	269.0	-	-	-	260.1	-	-				
111.5	277.8	227.1	-	277.8	218.3	-	269.0	-	-	260.1	-	-	253.5	-	-	-	244.7	-	-				
118.1	249.1*	209.4	-	255.7	205.0	-	253.5	197.3	-	244.7	-	-	238.1	-	-	-	229.3	-	-				
124.7	-	194.0	-	238.1	191.8	-	238.1	185.2	-	231.5	-	-	224.9	-	-	-	217.2	-	-				
131.2	-	180.8	-	222.7	178.6	-	220.5	175.3	-	218.3	166.4	-	212.7	-	-	-	203.9	-	-				
137.8	-	168.7	-	200.6*	166.4	-	207.2	164.2	-	203.9	157.6	-	200.6	151.0	-	-	192.9	-	-				
144.4	-	157.6	-	-	155.4	-	194.0	153.2	-	190.7	148.8	-	189.6	142.2	-	-	183.0	134.5	-				
150.9	-	147.7	115.7	-	145.5	-	183.0	143.3	-	179.7	138.9	-	178.6	134.5	-	-	174.2	126.8	-				
157.5	-	-	108.5	-	136.7	105.2	165.3*	135.6	-	168.7	130.1	-	167.6	127.9	-	-	165.3	120.2	-				
164.0	-	-	101.4	-	129.0	98.1	-	126.8	-	158.7	122.4	-	157.6	120.2	-	-	157.6	113.5	-				
177.2	-	-	89.3	-	-	86.2	-	113.5	83.1	136.7*	108.5	-	141.1	106.0	-	-	141.1	102.5	-				
190.3	-	-	-	-	-	76.1	-	-	73.0	-	96.1	67.0	121.3*	93.9	64.2	-	126.8	92.4	-				
203.4	-	-	-	-	-	-	-	-	64.6	-	86.0	58.6	-	83.6	55.8	-	113.5	82.0	53.8				
216.5	-	-	-	-	-	-	-	-	57.3	-	-	51.4	-	74.5	48.5	-	-	73.0	46.5				
229.7	-	-	-	-	-	-	-	-	-	-	-	45.2	-	-	42.3	-	-	65.0	40.3				
242.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	36.8	-	-	58.2	34.6				
255.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	32.4	-	-	-	29.8				
269.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	25.6				

 216.5 ft				236.2 ft				255.9 ft				275.6 ft				295.3 ft				315.0 ft			
 87°/85° 75° 65°				87°/85° 75° 65°				87°/85° 75° 65°				87°/85° 75° 65°				87°/85° 75° 65°				87°/85° 75° 65°			
ft								1,000 lb															
72.2	366.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
78.7	335.1	-	-	324.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
85.3	310.9	-	-	299.8	-	-	293.2	-	-	282.2	-	-	-	-	-	-	-	-	-	-	-	-	-
91.9	288.8	-	-	277.8	-	-	271.2	-	-	262.4	-	-	255.7	-	-	-	-	-	-	-	-	-	-
98.4	269.0	-	-	260.1	-	-	253.5	-	-	244.7	-	-	235.9	-	-	-	-	-	-	227.1	-	-	-
111.5	233.7	-	-	227.1	-	-	220.5	-	-	212.7	-	-	207.2	-	-	-	-	-	-	199.5	-	-	-
124.7	207.2	-	-	200.6	-	-	195.1	-	-	187.4	-	-	183.0	-	-	-	-	-	-	175.3	-	-	-
137.8	185.2	-	-	178.6	-	-	174.2	-	-	166.4	-	-	162.0	-	-	-	-	-	-	154.3	-	-	-
150.9	166.4	-	-	159.8	-	-	155.4	-	-	148.8	-	-	144.4	-	-	-	-	-	-	137.8	-	-	-
157.5	157.6	112.4	-	151.0	-	-	147.7	-	-	141.1	-	-	136.7	-	-	-	-	-	-	130.1	-	-	-
164.0	149.9	106.3	-	143.3	99.6	-	140.0	-	-	133.4	-	-	129.0	-	-	-	-	-	-	122.4	-	-	-
177.2	135.6	95.0	-	130.1	88.6	-	125.7	84.9	-	120.2	78.3	-	115.7	-	-	-	-	-	-	110.2	-	-	-
190.3	123.5	84.9	-	117.9	78.9	-	114.6	75.4	-	108.5	69.0	-	104.7	65.0	-	-	-	-	-	98.8	-	-	-
203.4	111.3	76.3	-	107.1	70.3	-	104.1	67.0	-	98.1	60.8	-	94.6	57.1	-	-	-	-	-	88.8	50.9	-	-
216.5	101.2	68.6	42.1	97.9	62.8	-	94.8	59.7	-	89.1	53.6	-	85.3	50.0	-	-	-	-	-	79.8	43.9	-	-
229.7	87.1*	61.3	36.2	88.8	56.0	30.6	86.4	53.1	-	80.7	47.2	-	77.4	43.7	-	-	-	-	-	71.9	37.7	-	-
242.8	-	54.2	30.4	80.5	50.0	25.6	78.9	47.2	22.7	73.4	41.2	-	69.9	37.9	-	-	-	-	-	64.6	32.0	-	-
255.9	-	48.1	25.6	-	43.9	20.7	71.2	41.7	18.3	66.8	35.9	-	63.3	32.6	-	-	-	-	-	58.0	26.9	-	-
269.0	-	-	21.2	-	38.4	16.5	59.5*	36.2	13.9	60.6	31.1	-	57.3	27.8	-	-	-	-	-	52.0	22.3	-	-
282.2	-	-	17.2	-	33.5	12.6	-	31.3	-	54.9	26.7	-	51.8	23.6	-	-	-	-	-	46.7	18.1	-	-
295.3	-	-	-	-	-	-	-	27.1	-	-	22.7	-	47.0	19.4	-	-	-	-	-	41.7	14.1	-	-
308.4	-	-	-	-	-	-	-	-	-	-	19.0	-	37.7*	15.9	-	-	-	-	-	37.0	-	-	-
321.5	-	-	-	-	-	-	-	-	-	-	15.4	-	-	12.3	-	-	-	-	-	33.1	-	-	-

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1


* Main boom angle 85°

 374,800 – 551,200 lb +  0–176,400 lb										 31.50 ft			 32.2 ft/s			360°		75%	
 196.9 ft																			
	 98.4 ft			118.1 ft			137.8 ft			157.5 ft			177.2 ft			196.9 ft			
	 [87°/85°]	75°	65°	[87°/85°]	75°	65°	[87°/85°]	75°	65°	[87°/85°]	75°	65°	[87°/85°]	75°	65°	[87°/85°]	75°	65°	
ft							1,000 lb												
45.9	654.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
52.5	579.8	-	-	560.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
55.8	549.0	-	-	529.1	-	-	511.5	-	-	-	-	-	-	-	-	-	-	-	
59.1	520.3	-	-	502.7	-	-	487.2	-	-	-	-	-	-	-	-	-	-	-	
62.3	493.8	-	-	478.4	-	-	463.0	-	-	447.5	-	-	-	-	-	-	-	-	
65.6	471.8	-	-	456.4	-	-	440.9	-	-	425.5	-	-	412.3	-	-	-	-	-	
72.2	429.9	-	-	416.7	-	-	403.4	-	-	390.2	-	-	377.0	-	-	366.0	-	-	
78.7	396.8	-	-	381.4	-	-	370.4	-	-	359.4	-	-	348.3	-	-	337.3	-	-	
85.3	366.0	-	-	352.7	-	-	343.9	-	-	330.7	-	-	321.9	-	-	310.9	-	-	
91.9	339.5	-	-	328.5	-	-	319.7	-	-	308.6	-	-	299.8	-	-	288.8	-	-	
98.4	317.5	-	-	306.4	-	-	297.6	-	-	286.6	-	-	277.8	-	-	269.0	-	-	
111.5	275.6	211.6	-	269.0	-	-	262.4	-	-	251.3	-	-	244.7	-	-	235.9	-	-	
118.1	244.7*	198.4	-	253.5	189.6	-	246.9	-	-	238.1	-	-	229.3	-	-	222.7	-	-	
124.7	-	185.2	-	235.9	178.6	-	231.5	170.9	-	224.9	-	-	217.2	-	-	209.4	-	-	
137.8	-	159.8	-	198.4*	157.6	-	206.1	152.1	-	201.7	144.4	-	195.1	-	-	187.4	-	-	
144.4	-	149.9	-	-	147.7	-	192.9	144.4	-	189.6	136.7	-	185.2	130.1	-	177.5	-	-	
150.9	-	140.0	-	-	137.8	-	180.8	136.7	-	177.5	129.0	-	175.3	122.4	-	168.7	115.7	-	
157.5	-	-	94.8	-	130.1	-	163.1*	127.9	-	167.6	122.4	-	166.4	115.7	-	159.8	109.1	-	
164.0	-	-	88.4	-	122.4	-	-	120.2	-	157.6	114.6	-	156.5	110.2	-	152.1	103.2	-	
177.2	-	-	77.2	-	-	74.1	-	106.0	71.0	134.5*	100.8	-	140.0	98.3	-	138.9	92.4	-	
190.3	-	-	-	-	-	64.6	-	94.4	61.7	-	89.1	55.3	125.7	86.6	-	125.7	82.9	-	
203.4	-	-	-	-	-	56.9	-	-	53.8	-	79.1	47.6	-	76.7	45.0	113.5	74.7	-	
216.5	-	-	-	-	-	-	-	-	47.2	-	-	41.0	-	68.1	38.4	97.4*	66.8	36.4	
229.7	-	-	-	-	-	-	-	-	-	-	-	35.5	-	60.8	32.6	-	59.3	30.6	
242.8	-	-	-	-	-	-	-	-	-	-	-	30.6	-	-	27.6	-	52.5	25.6	
255.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	23.4	-	-	21.2	
269.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	17.2	
282.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	13.9	

216.5 ft 87°/85° 75° 65°			
ft	1,000 lb		
78.7	324.1	-	-
85.3	299.8	-	-
91.9	277.8	-	-
98.4	257.9	-	-
111.5	227.1	-	-
124.7	200.6	-	-
137.8	178.6	-	-
150.9	160.9	-	-
157.5	152.1	101.0	-
164.0	144.4	95.2	-
177.2	131.2	84.7	-
190.3	119.0	75.6	-
203.4	109.1	67.5	-
216.5	99.9	60.2	-
229.7	84.9*	53.8	25.4
242.8	-	47.8	20.7
255.9	-	42.5	16.8
269.0	-	37.5	13.0

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

* Main boom angle 85°

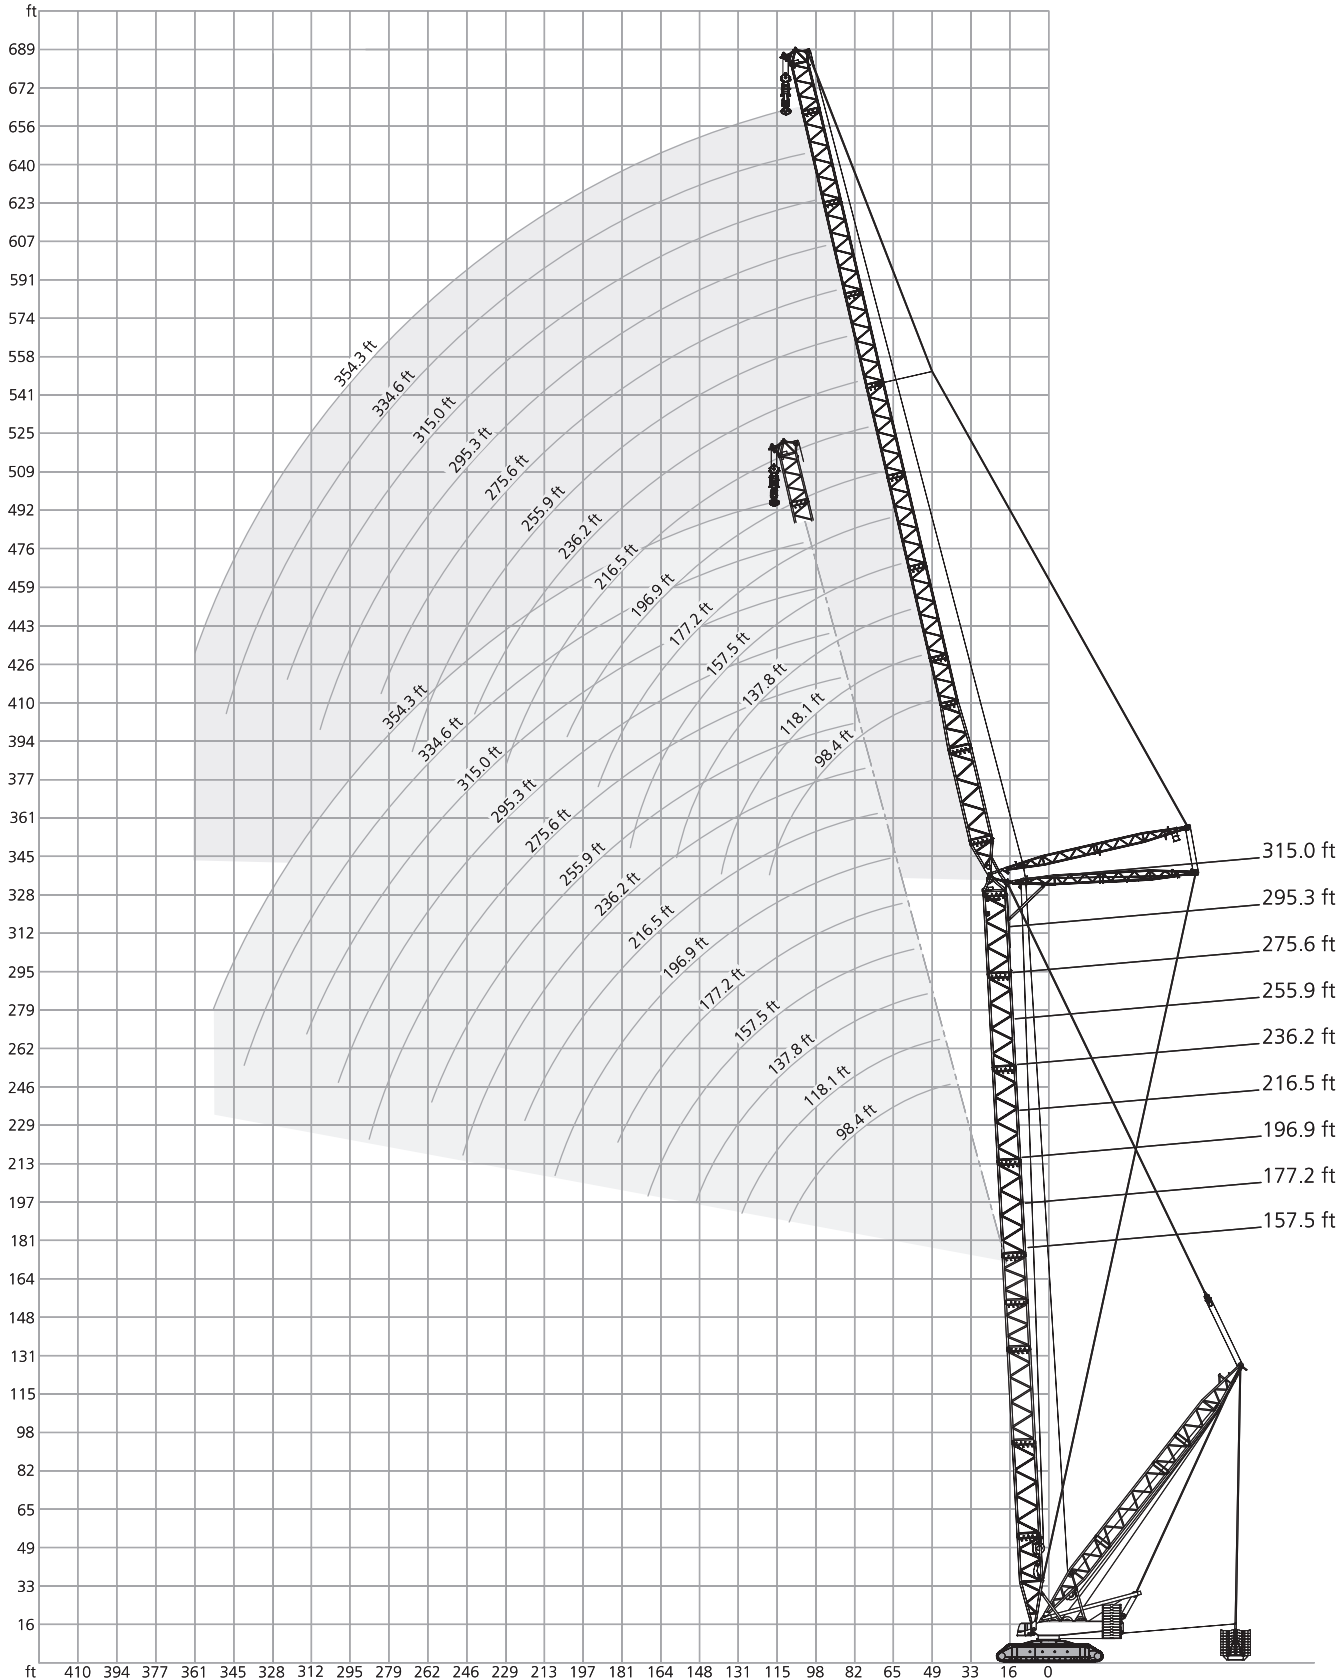

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
157.5 ft + 118.1 ft									
SWSL SFSL 0 lb 176,400 lb – 992,100 lb 87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
49.2	751.8*	1067.0*	-	-	-	-	-	-	-
52.5	707.7*	1051.6*	-	-	-	-	-	-	-
59.1	632.7*	1104.5	-	-	-	-	-	-	-
62.3	601.9*	1104.5	-	-	-	-	-	-	1029.6
65.6	573.2*	1093.5	-	-	-	-	-	-	1029.6
72.2	522.5*	1067.0	-	-	-	-	-	-	1029.6
78.7	476.2*	1038.4	-	-	-	-	-	-	1029.6
85.3	431.0*	961.2	-	-	-	-	-	-	1029.6
91.9	392.4*	862.0	-	-	-	-	-	-	1022.9
98.4	359.4*	780.4	-	-	-	-	-	-	994.3
105.0	330.7*	712.1	937.0	-	-	-	-	-	929.2
111.5	305.3*	654.8	879.6	-	-	-	-	-	864.2
124.7	263.5*	562.2	780.4	-	-	-	-	-	758.4
131.2	245.8*	524.7	725.3	-	-	-	-	-	716.5
137.8	-	-	665.8	-	-	-	-	-	674.6
150.9	-	-	571.0	608.5	-	-	-	-	604.1
164.0	-	-	498.2	553.4	-	-	-	-	544.5
177.2	-	-	-	507.1	-	-	-	-	478.4
190.3	-	-	-	467.4	414.5	-	-	-	421.1
203.4	-	-	-	-	382.5	-	-	-	370.4
216.5	-	-	-	-	-	-	-	-	337.3
229.7	-	-	-	-	-	-	-	-	293.2
242.8	-	-	-	-	-	-	-	-	253.5
255.9	-	-	-	-	-	-	-	-	213.8

157.5 ft + 157.5 ft									
ft	1,000 lb								
59.1	593.0*	811.3*	-	-	-	-	-	-	-
65.6	537.9*	806.9*	-	-	-	-	-	-	-
72.2	491.6*	833.3	-	-	-	-	-	-	-
78.7	451.9*	831.1	-	-	-	-	-	-	791.5
85.3	418.9*	824.5	-	-	-	-	-	-	791.5
91.9	386.9*	809.1	-	-	-	-	-	-	791.5
98.4	353.8*	791.5	-	-	-	-	-	-	791.5
111.5	300.9*	694.5	-	-	-	-	-	-	791.5
124.7	259.0*	593.0	773.8	-	-	-	-	-	765.0
137.8	226.0*	515.9	690.0	-	-	-	-	-	679.0
150.9	199.5*	454.2	604.1	-	-	-	-	-	608.5
164.0	177.3*	403.4	524.7	-	-	-	-	-	549.0
177.2	-	-	460.8	500.4	-	-	-	-	498.2
190.3	-	-	410.1	460.8	-	-	-	-	449.7
203.4	-	-	-	425.5	-	-	-	-	399.0
216.5	-	-	-	394.6	346.1	-	-	-	354.9
229.7	-	-	-	-	320.8	-	-	-	315.3
242.8	-	-	-	-	299.8	-	-	-	291.0
255.9	-	-	-	-	-	252.4	-	-	255.7
269.0	-	-	-	-	-	235.9	-	-	224.9
282.2	-	-	-	-	-	-	-	-	194.0
295.3	-	-	-	-	-	-	-	-	163.1

157.5 ft + 236.2 ft									
ft	1,000 lb								
78.7	400.1*	476.2*	-	-	-	-	-	-	-
85.3	370.4*	471.8*	-	-	-	-	-	-	-
91.9	343.9*	476.2	-	-	-	-	-	-	-
98.4	320.8*	476.2	-	-	-	-	-	-	463.0
111.5	282.2*	469.6	-	-	-	-	-	-	463.0
124.7	245.8*	458.6	-	-	-	-	-	-	463.0
137.8	214.3*	449.7	-	-	-	-	-	-	463.0
150.9	187.8*	438.7	-	-	-	-	-	-	460.8
157.5	176.4*	424.4	451.9	-	-	-	-	-	458.6
164.0	165.8*	400.1	451.9	-	-	-	-	-	456.4
177.2	147.0*	358.3	449.7	-	-	-	-	-	443.1
190.3	131.2*	324.1	405.7	-	-	-	-	-	429.9
203.4	117.3*	293.2	363.8	-	-	-	-	-	403.4
216.5	105.2*	267.9	328.5	379.2	-	-	-	-	379.2
229.7	94.4*	244.7	297.6	352.7	-	-	-	-	354.9
242.8	84.9*	223.8	271.2	328.5	-	-	-	-	319.7
255.9	-	-	248.0	298.7	-	-	-	-	286.6
269.0	-	-	227.1	272.3	-	-	-	-	257.9
282.2	-	-	-	249.1	234.8	-	-	-	233.7
295.3	-	-	-	228.2	220.5	-	-	-	218.3
308.4	-	-	-	-	209.2	-	-	-	196.2
321.5	-	-	-	-	198.2	168.9	-	-	174.2
334.6	-	-	-	-	-	159.0	-	-	153.2
347.8	-	-	-	-	-	149.7	-	-	133.4
360.9	-	-	-	-	-	-	-	-	112.4
374.0	-	-	-	-	-	-	-	-	92.6

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
157.5 ft + 275.6 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
85.3	347.2*	362.7*	-	-	-	-	-	-	-
91.9	325.2*	361.6*	-	-	-	-	-	-	-
98.4	304.2*	358.3*	-	-	-	-	-	-	-
105.0	285.5*	361.6	-	-	-	-	-	-	-
111.5	266.8*	359.4	-	-	-	-	-	352.7	-
124.7	235.9*	354.9	-	-	-	-	-	350.5	-
137.8	209.9*	349.4	-	-	-	-	-	350.5	-
150.9	183.4*	343.9	-	-	-	-	-	350.5	-
164.0	161.2*	337.3	-	-	-	-	-	346.1	-
177.2	142.6*	330.7	336.2	-	-	-	-	343.9	-
190.3	126.5*	321.9	336.2	-	-	-	-	337.3	-
203.4	112.7*	292.1	336.2	-	-	-	-	332.9	-
216.5	100.5*	265.7	326.3	-	-	-	-	326.3	-
229.7	89.9*	242.5	295.4	-	-	-	-	321.9	-
242.8	80.5*	222.7	269.0	299.8	-	-	-	308.6	-
255.9	71.9*	205.5	245.8	296.5	-	-	-	291.0	-
269.0	64.2*	189.4	226.0	270.1	-	-	-	273.4	-
282.2	57.1*	174.6	208.1	246.9	-	-	-	246.9	-
295.3	-	-	192.0	227.1	-	-	-	222.7	-
308.4	-	-	177.0	209.0	204.1	-	-	205.0	-
321.5	-	-	-	192.7	193.1	-	-	190.7	-
334.6	-	-	-	178.1	183.0	-	-	170.9	-
347.8	-	-	-	-	173.5	-	-	152.1	-
360.9	-	-	-	-	164.5	134.3	-	134.5	-
374.0	-	-	-	-	-	126.5	117.9	-	-
387.1	-	-	-	-	-	119.3	101.6	-	-
400.3	-	-	-	-	-	-	84.7	-	-
413.4	-	-	-	-	-	-	67.2	-	-
157.5 ft + 315.0 ft									
ft	1,000 lb								
98.4	259.0*	272.3*	-	-	-	-	-	-	-
111.5	251.3*	270.1	-	-	-	-	-	-	-
124.7	222.7*	266.8	-	-	-	-	-	262.4	-
137.8	198.4*	262.4	-	-	-	-	-	260.1	-
150.9	177.7*	257.9	-	-	-	-	-	257.9	-
164.0	156.3*	253.5	-	-	-	-	-	257.9	-
177.2	137.6*	248.0	-	-	-	-	-	253.5	-
190.3	121.5*	242.5	243.6	-	-	-	-	249.1	-
203.4	107.6*	238.1	242.5	-	-	-	-	246.9	-
216.5	95.5*	232.6	241.4	-	-	-	-	240.3	-
229.7	84.7*	227.1	239.2	-	-	-	-	235.9	-
242.8	75.2*	220.5	237.0	-	-	-	-	231.5	-
255.9	66.8*	202.6	233.7	-	-	-	-	227.1	-
269.0	59.1*	186.7	222.7	212.7	-	-	-	222.7	-
282.2	52.0*	172.2	205.3	212.7	-	-	-	219.4	-
295.3	45.9*	159.2	188.9	212.7	-	-	-	215.0	-
308.4	39.9*	147.3	174.4	205.7	-	-	-	209.4	-
321.5	34.6*	136.0	161.4	189.6	-	-	-	192.9	-
334.6	-	-	149.3	175.3	177.7	-	-	178.6	-
347.8	-	-	138.0	162.0	167.3	-	-	165.3	-
360.9	-	-	-	149.9	157.6	-	-	148.8	-
374.0	-	-	-	138.9	148.8	-	-	132.3	-
387.1	-	-	-	-	140.7	112.9	116.8	-	-
400.3	-	-	-	-	132.9	106.9	103.0	-	-
413.4	-	-	-	-	-	101.4	88.6	-	-
426.5	-	-	-	-	-	96.1	74.5	-	-
439.6	-	-	-	-	-	-	60.2	-	-
157.5 ft + 354.3 ft									
ft	1,000 lb								
105.0	196.2*	207.7*	-	-	-	-	-	-	-
111.5	196.2*	206.8*	-	-	-	-	-	-	-
124.7	194.7	205.0	-	-	-	-	-	-	-
137.8	186.1*	201.9	-	-	-	-	-	199.5	-
150.9	166.2*	198.9	-	-	-	-	-	197.3	-
164.0	149.3*	195.8	-	-	-	-	-	196.2	-
177.2	133.4*	192.5	-	-	-	-	-	194.0	-
190.3	117.1*	189.2	-	-	-	-	-	190.7	-
203.4	103.2*	185.6	-	-	-	-	-	188.5	-
216.5	90.8*	182.3	181.2	-	-	-	-	185.2	-
229.7	80.0*	179.0	180.1	-	-	-	-	181.9	-
242.8	70.5*	175.7	179.0	-	-	-	-	178.6	-
255.9	61.9*	172.0	177.7	-	-	-	-	174.2	-
269.0	54.2*	166.9	176.4	-	-	-	-	170.9	-
282.2	47.2*	160.5	174.8	-	-	-	-	167.6	-
295.3	40.8*	153.9	173.5	155.6	-	-	-	164.2	-
308.4	35.1*	144.6	171.5	155.6	-	-	-	160.9	-
321.5	29.8*	133.6	158.3	155.6	-	-	-	157.6	-
334.6	24.9*	123.7	146.4	155.6	-	-	-	153.2	-
347.8	20.3*	114.4	135.4	155.6	-	-	-	148.8	-
360.9	12.6	105.6	125.4	147.0	135.8	-	-	144.4	-
374.0	-	-	116.0	136.0	135.8	-	-	138.9	-
387.1	-	-	107.1	125.9	134.5	-	-	127.9	-
400.3	-	-	-	116.6	126.8	-	-	114.6	-
413.4	-	-	-	107.8	119.5	-	-	101.4	-
426.5	-	-	-	-	112.9	90.4	88.6	-	-
439.6	-	-	-	-	106.5	85.3	76.1	-	-
452.8	-	-	-	-	-	80.7	63.7	-	-
465.9	-	-	-	-	-	-	51.6	-	-
479.0	-	-	-	-	-	-	39.0	-	-
177.2 ft + 118.1 ft									
ft	1,000 lb								
52.5	681.2*	992.1*	-	-	-	-	-	-	-
59.1	610.7*	967.8*	-	-	-	-	-	-	-
62.3	582.0*	1020.7	-	-	-	-	-	956.8	-
65.6	553.4*	1009.7	-	-	-	-	-	956.8	-
72.2	507.1*	987.7	-	-	-	-	-	956.8	-
78.7	465.2*	963.4	-	-	-	-	-	956.8	-
85.3	427.7*	937.0	-	-	-	-	-	956.8	-
91.9	389.1*	884.1	-	-	-	-	-	948.0	-
98.4	356.0*	800.3	-	-	-	-	-	939.2	-
111.5	303.1*	668.0	868.6	-	-	-	-	857.6	-
124.7	261.2*	573.2	771.6	-	-	-	-	751.8	-
131.2	243.6*	533.5	727.5	-	-	-	-	709.9	-
137.8	220.2	498.2	687.8	-	-	-	-	668.0	-
150.9	-	-	604.1	-	-	-	-	597.5	-
157.5	-	-	560.0	571.0	-	-	-	567.7	-
164.0	-	-	522.5	544.5	-	-	-	537.9	-
177.2	-	-	-	498.2	-	-	-	487.2	-
190.3	-	-	-	458.6	-	-	-	445.3	-
203.4	-	-	-	-	391.3	-	-	392.4	-
216.5	-	-	-	-	362.7	-	-	346.1	-
229.7	-	-	-	-	-	-	-	304.2	-
242.8	-	-	-	-	-	-	-	280.0	-
255.9	-	-	-	-	-	-	-	242.5	-
269.0	-	-	-	-	-	-	-	206.1	-

* Main boom angle 87° · For explanations see page 79

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
177.2 ft + 157.5 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
59.1	573.2*	760.6*	-	-	-	-	-	-	-
65.6	520.3*	756.2*	-	-	-	-	-	-	-
72.2	476.2*	776.0	-	-	-	-	-	-	-
78.7	438.7*	773.8	-	-	-	-	-	-	-
85.3	405.7*	767.2	-	-	-	-	-	-	740.8
91.9	377.0*	754.0	-	-	-	-	-	-	740.8
98.4	351.6*	738.5	-	-	-	-	-	-	740.8
111.5	297.6*	707.7	-	-	-	-	-	-	734.1
124.7	256.8*	612.9	-	-	-	-	-	-	727.5
131.2	239.2*	568.8	723.1	-	-	-	-	-	700.0
137.8	223.8*	531.3	683.4	-	-	-	-	-	672.4
150.9	197.3*	467.4	615.1	-	-	-	-	-	601.9
164.0	175.0*	414.5	560.0	-	-	-	-	-	542.3
177.2	149.5	367.1	489.4	-	-	-	-	-	491.6
190.3	-	-	434.3	451.9	-	-	-	-	447.5
203.4	-	-	386.9	418.9	-	-	-	-	410.1
216.5	-	-	-	389.1	-	-	-	-	374.8
229.7	-	-	-	363.8	327.4	-	-	-	332.9
242.8	-	-	-	-	305.3	-	-	-	297.6
255.9	-	-	-	-	286.6	-	-	-	262.4
269.0	-	-	-	-	-	239.2	-	-	242.5
282.2	-	-	-	-	-	224.9	-	-	215.0
295.3	-	-	-	-	-	-	-	-	186.3
308.4	-	-	-	-	-	-	-	-	165.3

177.2 ft + 196.9 ft									
ft	1,000 lb								
72.2	447.5*	584.2*	-	-	-	-	-	-	-
78.7	413.4*	582.0*	-	-	-	-	-	-	-
85.3	382.5*	595.2	-	-	-	-	-	-	-
91.9	356.0*	593.0	-	-	-	-	-	-	577.6
98.4	331.8*	590.8	-	-	-	-	-	-	577.6
111.5	292.1*	577.6	-	-	-	-	-	-	577.6
124.7	259.0*	560.0	-	-	-	-	-	-	577.6
137.8	226.0*	540.1	-	-	-	-	-	-	573.2
144.4	211.4*	504.9	584.2	-	-	-	-	-	567.7
150.9	198.2*	474.0	579.8	-	-	-	-	-	566.6
164.0	175.5*	422.2	564.4	-	-	-	-	-	546.7
177.2	156.1*	377.0	498.2	-	-	-	-	-	500.4
190.3	139.6*	340.6	440.9	-	-	-	-	-	456.4
203.4	125.2*	307.5	393.5	420.0	-	-	-	-	416.7
216.5	-	-	353.8	390.2	-	-	-	-	383.6
229.7	-	-	320.8	362.7	-	-	-	-	352.7
242.8	-	-	291.0	339.5	-	-	-	-	324.1
255.9	-	-	-	318.6	283.3	-	-	-	291.0
269.0	-	-	-	299.8	265.7	-	-	-	262.4
282.2	-	-	-	-	249.1	-	-	-	233.7
295.3	-	-	-	-	233.7	-	-	-	213.8
308.4	-	-	-	-	-	194.9	-	-	194.0
321.5	-	-	-	-	-	183.6	-	-	169.8
334.6	-	-	-	-	-	-	-	-	146.6
347.8	-	-	-	-	-	-	-	-	134.5

177.2 ft + 236.2 ft									
ft	1,000 lb								
78.7	388.0*	449.7*	-	-	-	-	-	-	-
85.3	359.4*	447.5*	-	-	-	-	-	-	-
91.9	334.0*	454.2	-	-	-	-	-	-	-
98.4	312.0*	451.9	-	-	-	-	-	-	-
111.5	273.4*	445.3	-	-	-	-	-	-	440.9
124.7	242.5*	438.7	-	-	-	-	-	-	440.9
137.8	212.3*	429.9	-	-	-	-	-	-	440.9
150.9	186.1*	420.0	-	-	-	-	-	-	440.9
164.0	164.0*	410.1	433.2	-	-	-	-	-	440.9
177.2	145.5*	369.3	432.1	-	-	-	-	-	427.7
190.3	129.6*	332.9	428.8	-	-	-	-	-	416.7
203.4	116.0*	302.0	384.7	-	-	-	-	-	405.7
216.5	103.8*	274.5	346.1	-	-	-	-	-	383.6
229.7	93.3*	251.3	313.1	349.4	-	-	-	-	352.7
242.8	83.6*	230.4	285.5	327.4	-	-	-	-	326.3
255.9	-	-	260.1	306.4	-	-	-	-	302.0
269.0	-	-	238.1	288.8	-	-	-	-	273.4
282.2	-	-	219.1	267.9	235.9	-	-	-	246.9
295.3	-	-	-	244.7	221.6	-	-	-	220.5
308.4	-	-	-	224.9	209.0	-	-	-	198.4
321.5	-	-	-	-	197.1	-	-	-	184.1
334.6	-	-	-	-	185.8	161.2	-	-	166.4
347.8	-	-	-	-	-	151.9	-	-	146.6
360.9	-	-	-	-	-	143.3	-	-	127.9
374.0	-	-	-	-	-	-	-	-	113.5
387.1	-	-	-	-	-	-	-	-	99.2

177.2 ft + 275.6 ft									
ft	1,000 lb								
85.3	330.7*	346.1*	-	-	-	-	-	-	-
91.9	315.3*	345.0*	-	-	-	-	-	-	-
98.4	294.3*	341.7*	-	-	-	-	-	-	-
105.0	276.1*	345.0	-	-	-	-	-	-	-
111.5	257.9*	342.8	-	-	-	-	-	-	-
124.7	229.3*	339.5	-	-	-	-	-	-	335.1
137.8	205.0*	334.0	-	-	-	-	-	-	335.1
150.9	181.7*	329.6	-	-	-	-	-	-	335.1
164.0	159.6*	323.0	-	-	-	-	-	-	332.9
177.2	141.1*	317.5	323.0	-	-	-	-	-	330.7
190.3	125.0*	312.0	323.0	-	-	-	-	-	326.3
203.4	111.3*	299.8	323.0	-	-	-	-	-	321.9
216.5	99.2*	273.4	321.9	-	-	-	-	-	315.3
229.7	88.6*	250.2	312.0	-	-	-	-	-	310.9
242.8	79.1*	229.3	283.3	-	-	-	-	-	306.4
255.9	70.8*	211.0	259.0	287.7	-	-	-	-	299.8
269.0	63.1*	194.4	237.0	283.3	-	-	-	-	282.2
282.2	56.2*	179.5	218.5	265.7	-	-	-	-	260.1
295.3	-	-	201.3	243.6	-	-	-	-	235.9
308.4	-	-	185.8	223.8	-	-	-	-	213.8
321.5	-	-	171.3	206.4	190.3	-	-	-	192.9
334.6	-	-	-	190.5	179.2	-	-	-	173.1
347.8	-	-	-	175.9	169.1	-	-	-	159.8
360.9	-	-	-	-	159.6	-	-	-	145.5
374.0	-	-	-	-	151.0	128.3	-	-	129.0
387.1	-	-	-	-	-	121.0	-	-	112.4
400.3	-	-	-	-	-	114.2	-	-	98.1
413.4	-	-	-	-	-	-	-	-	89.7
426.5	-	-	-	-	-	-	-	-	73.6

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb
	705,600 lb	882,000 lb	992,100 lb	

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
177.2 ft + 315.0 ft									
SWSL SFSL 0 lb 176,400 lb – 992,100 lb 87°/85° 87°/85° 75° 65° 55° 45° ft 1,000 lb									
98.4	248.0*	261.2*	-	-	-	-	-	-	-
111.5	243.6*	257.9	-	-	-	-	-	-	-
124.7	215.8*	255.7	-	-	-	-	-	251.3	-
137.8	192.2*	252.4	-	-	-	-	-	249.1	-
150.9	172.4*	248.0	-	-	-	-	-	249.1	-
164.0	154.8*	243.6	-	-	-	-	-	246.9	-
177.2	136.0*	239.2	-	-	-	-	-	244.7	-
190.3	120.2*	234.8	-	-	-	-	-	242.5	-
203.4	106.3*	229.3	233.7	-	-	-	-	238.1	-
216.5	94.1*	224.9	233.7	-	-	-	-	235.9	-
229.7	83.6*	220.2	232.6	-	-	-	-	231.5	-
242.8	74.1*	213.8	230.4	-	-	-	-	227.1	-
255.9	65.5*	205.5	228.2	-	-	-	-	222.7	-
269.0	58.0*	192.0	226.0	-	-	-	-	218.3	-
282.2	51.1*	177.3	215.6	204.6	-	-	-	213.8	-
295.3	44.8*	163.8	198.6	204.6	-	-	-	210.5	-
308.4	39.0*	151.5	183.2	204.6	-	-	-	206.1	-
321.5	33.7*	140.0	169.3	203.3	-	-	-	201.7	-
334.6	-	-	156.7	187.6	-	-	-	184.1	-
347.8	-	-	145.1	173.3	162.3	-	-	166.4	-
360.9	-	-	-	160.5	153.2	-	-	149.9	-
374.0	-	-	-	148.6	145.3	-	-	137.8	-
387.1	-	-	-	137.6	138.0	-	-	126.8	-
400.3	-	-	-	-	131.2	106.7	-	112.4	-
413.4	-	-	-	-	-	124.8	100.3	98.3	-
426.5	-	-	-	-	-	-	94.4	84.7	-
439.6	-	-	-	-	-	-	88.8	75.2	-
452.8	-	-	-	-	-	-	-	65.0	-
465.9	-	-	-	-	-	-	-	50.9	-

SWSL SFSL 0 lb 176,400 lb – 992,100 lb 87°/85° 87°/85° 75° 65° 55° 45° ft 1,000 lb									
105.0	188.9*	199.1*	-	-	-	-	-	-	-
111.5	188.9*	198.2*	-	-	-	-	-	-	-
124.7	187.2*	196.2	-	-	-	-	-	-	-
137.8	180.1*	194.0	-	-	-	-	-	190.7	-
150.9	160.9*	191.4	-	-	-	-	-	189.6	-
164.0	144.2*	188.5	-	-	-	-	-	188.5	-
177.2	129.9*	185.6	-	-	-	-	-	187.4	-
190.3	115.7*	182.5	-	-	-	-	-	184.1	-
203.4	101.9*	179.2	-	-	-	-	-	181.9	-
216.5	89.5*	176.1	174.4	-	-	-	-	179.7	-
229.7	78.9*	172.8	173.9	-	-	-	-	176.4	-
242.8	69.2*	169.8	173.3	-	-	-	-	173.1	-
255.9	60.8*	166.4	172.4	-	-	-	-	169.8	-
269.0	53.1*	161.6	171.3	-	-	-	-	166.4	-
282.2	46.3*	155.0	170.2	-	-	-	-	163.1	-
295.3	39.9*	148.4	169.1	149.3	-	-	-	159.8	-
308.4	34.2*	141.8	167.6	149.3	-	-	-	156.5	-
321.5	28.9*	135.1	165.6	149.3	-	-	-	154.3	-
334.6	24.0*	127.4	153.9	149.3	-	-	-	149.9	-
347.8	19.4*	117.9	142.4	149.3	-	-	-	147.7	-
360.9	15.2*	108.9	131.8	149.3	-	-	-	142.2	-
374.0	-	-	122.1	145.7	130.1	-	-	137.8	-
387.1	-	-	112.9	135.1	130.1	-	-	129.0	-
400.3	-	-	-	125.0	125.9	-	-	117.9	-
413.4	-	-	-	115.7	119.5	-	-	109.6	-
426.5	-	-	-	107.1	113.3	-	-	96.6	-
439.6	-	-	-	-	107.8	82.0	-	84.2	-
452.8	-	-	-	-	102.5	76.7	72.1	-	-
465.9	-	-	-	-	-	71.7	61.7	-	-
479.0	-	-	-	-	-	-	55.6	-	-
492.1	-	-	-	-	-	-	43.7	-	-
505.3	-	-	-	-	-	-	31.3	-	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0 – 176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
196.9 ft + 118.1 ft SWSL SFSL 0 lb 176,400 lb – 992,100 lb 87°/85° 87°/85° 75° 65° 55° 45° ft 1,000 lb									
52.5	654.8*	908.3*	-	-	-	-	-	-	-
59.1	588.6*	886.3*	-	-	-	-	-	-	-
62.3	562.2*	941.4	-	-	-	-	-	-	-
65.6	535.7*	941.4	-	-	-	-	-	-	873.0
72.2	489.4*	923.7	-	-	-	-	-	-	873.0
78.7	449.7*	903.9	-	-	-	-	-	-	873.0
85.3	417.8*	881.8	-	-	-	-	-	-	873.0
91.9	385.8*	844.4	-	-	-	-	-	-	873.0
98.4	352.7*	815.7	-	-	-	-	-	-	864.2
111.5	299.8*	681.2	-	-	-	-	-	-	851.0
118.1	277.8*	628.3	806.9	-	-	-	-	-	798.1
124.7	259.0*	582.0	762.8	-	-	-	-	-	745.2
131.2	241.4*	542.3	718.7	-	-	-	-	-	703.3
137.8	216.5	507.1	681.2	-	-	-	-	-	661.4
150.9	-	-	612.9	-	-	-	-	-	590.8
164.0	-	-	551.2	-	-	-	-	-	531.3
173.9	-	-	-	498.2	-	-	-	-	493.3
177.2	-	-	-	487.2	-	-	-	-	480.6
190.3	-	-	-	449.7	-	-	-	-	436.5
203.4	-	-	-	416.7	-	-	-	-	399.0
216.5	-	-	-	-	362.7	-	-	-	361.6
229.7	-	-	-	-	338.4	-	-	-	319.7
242.8	-	-	-	-	-	-	-	-	282.2
255.9	-	-	-	-	-	-	-	-	251.3
269.0	-	-	-	-	-	-	-	-	227.1
282.2	-	-	-	-	-	-	-	-	195.1
295.3	-	-	-	-	-	-	-	-	168.7

196.9 ft + 196.9 ft SWSL SFSL 0 lb 176,400 lb – 992,100 lb 87°/85° 87°/85° 75° 65° 55° 45° ft 1,000 lb									
72.2	433.2*	546.7*	-	-	-	-	-	-	-
78.7	400.1*	544.5*	-	-	-	-	-	-	-
85.3	370.4*	560.0	-	-	-	-	-	-	-
91.9	345.0*	560.0	-	-	-	-	-	-	537.9
98.4	321.9*	560.0	-	-	-	-	-	-	537.9
111.5	284.4*	551.2	-	-	-	-	-	-	537.9
124.7	252.4*	535.7	-	-	-	-	-	-	537.9
137.8	223.8*	520.3	-	-	-	-	-	-	537.9
150.9	196.2*	487.2	551.2	-	-	-	-	-	533.5
164.0	173.5*	432.1	546.7	-	-	-	-	-	515.9
177.2	154.3*	386.9	509.3	-	-	-	-	-	493.8
190.3	137.8*	348.3	465.2	-	-	-	-	-	449.7
203.4	123.7*	315.3	415.6	-	-	-	-	-	410.1
216.5	104.3	282.2	372.6	381.4	-	-	-	-	377.0
229.7	-	-	336.2	354.9	-	-	-	-	346.1
242.8	-	-	305.3	331.8	-	-	-	-	319.7
255.9	-	-	-	312.0	-	-	-	-	295.4
269.0	-	-	-	293.2	265.7	-	-	-	271.2
282.2	-	-	-	275.6	249.1	-	-	-	242.5
295.3	-	-	-	-	233.7	-	-	-	218.3
308.4	-	-	-	-	220.5	-	-	-	194.0
321.5	-	-	-	-	-	180.6	-	-	177.5
334.6	-	-	-	-	-	171.1	-	-	158.7
347.8	-	-	-	-	-	-	-	-	137.8
360.9	-	-	-	-	-	-	-	-	116.8

196.9 ft + 157.5 ft SWSL SFSL 0 lb 176,400 lb – 992,100 lb 87°/85° 87°/85° 75° 65° 55° 45° ft 1,000 lb									
62.3	526.9*	705.5*	-	-	-	-	-	-	-
65.6	502.7*	701.1*	-	-	-	-	-	-	-
72.2	460.8*	729.7	-	-	-	-	-	-	-
78.7	424.4*	725.3	-	-	-	-	-	-	683.4
85.3	393.5*	720.9	-	-	-	-	-	-	683.4
91.9	366.0*	712.1	-	-	-	-	-	-	683.4
98.4	341.7*	698.9	-	-	-	-	-	-	683.4
111.5	294.3*	670.2	-	-	-	-	-	-	683.4
124.7	253.5*	623.9	-	-	-	-	-	-	676.8
134.5	229.3*	561.1	694.5	-	-	-	-	-	666.9
137.8	221.6*	542.3	674.6	-	-	-	-	-	665.8
150.9	195.1*	478.4	608.5	-	-	-	-	-	595.2
164.0	172.8*	424.4	551.2	-	-	-	-	-	535.7
177.2	146.2	378.1	504.9	-	-	-	-	-	485.0
190.3	-	-	456.4	443.1	-	-	-	-	440.9
203.4	-	-	407.9	410.1	-	-	-	-	403.4
216.5	-	-	-	381.4	-	-	-	-	368.2
229.7	-	-	-	354.9	-	-	-	-	339.5
242.8	-	-	-	332.9	305.3	-	-	-	308.6
255.9	-	-	-	-	286.6	-	-	-	275.6
269.0	-	-	-	-	269.0	-	-	-	244.7
282.2	-	-	-	-	-	217.8	-	-	218.3
295.3	-	-	-	-	-	205.9	-	-	200.6
308.4	-	-	-	-	-	-	175.3	-	175.3
321.5	-	-	-	-	-	-	-	149.9	149.9

196.9 ft + 236.2 ft SWSL SFSL 0 lb 176,400 lb – 992,100 lb 87°/85° 87°/85° 75° 65° 55° 45° ft 1,000 lb									
78.7	374.8*	425.5*	-	-	-	-	-	-	-
85.3	347.2*	423.3*	-	-	-	-	-	-	-
91.9	323.0*	431.0	-	-	-	-	-	-	-
98.4	302.0*	431.0	-	-	-	-	-	-	-
111.5	265.7*	426.6	-	-	-	-	-	-	414.5
124.7	235.9*	420.0	-	-	-	-	-	-	414.5
137.8	210.3*	412.3	-	-	-	-	-	-	414.5
150.9	184.1*	403.4	-	-	-	-	-	-	414.5
164.0	162.3*	394.6	-	-	-	-	-	-	414.5
177.2	144.0*	378.1	410.1	-	-	-	-	-	410.1
190.3	128.1*	340.6	409.0	-	-	-	-	-	396.8
203.4	114.4*	308.6	406.8	-	-	-	-	-	385.8
216.5	102.3*	281.1	364.9	-	-	-	-	-	377.0
229.7	91.7*	256.8	329.6	-	-	-	-	-	346.1
242.8	82.2*	234.8	298.7	319.7	-	-	-	-	319.7
255.9	-	-	272.3	299.8	-	-	-	-	295.4
269.0	-	-	249.1	281.1	-	-	-	-	273.4
282.2	-	-	228.2	265.7	-	-	-	-	253.5
295.3	-	-	-	250.2	221.6	-	-	-	229.3
308.4	-	-	-	237.0	208.8	-	-	-	207.2
321.5	-	-	-	220.5	196.7	-	-	-	185.2
334.6	-	-	-	-	185.6	-	-	-	165.3
347.8	-	-	-	-	175.5	149.9	-	-	151.0
360.9	-	-	-	-	-	141.3	-	-	136.7
374.0	-	-	-	-	-	133.4	-	-	119.0
387.1	-	-	-	-	-	-	-	-	101.9
400.3	-	-	-	-	-	-	-	-	89.5

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1


0 lb
176,400 lb
352,800 lb
529,200 lb
705,600 lb
882,000 lb
992,100 lb

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%												
196.9 ft + 275.6 ft												

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
---	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0 – 176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%

 196.9 ft +  354.3 ft							
		SWSL					SFSL
		0 lb	176,400 lb – 992,100 lb				
		87°/85°	87°/85°	75°	65°	55°	45°
ft		1,000 lb					
105.0	175.9*	186.1*	-	-	-	-	-
111.5	175.9*	185.4*	-	-	-	-	-
124.7	174.8	183.4	-	-	-	-	-
137.8	171.1*	181.7	-	-	-	-	-
150.9	155.4*	179.0	-	-	-	-	177.5
164.0	139.3*	176.4	-	-	-	-	176.4
177.2	125.2*	173.7	-	-	-	-	175.3
190.3	112.9*	170.9	-	-	-	-	173.1
203.4	100.3*	167.8	-	-	-	-	170.9
216.5	88.2*	164.7	161.8	-	-	-	167.6
229.7	77.6*	161.8	161.6	-	-	-	165.3
242.8	68.1*	158.7	161.2	-	-	-	162.0
255.9	59.5*	155.9	160.7	-	-	-	159.8
269.0	52.0*	151.5	160.1	-	-	-	156.5
282.2	45.2*	145.5	159.0	-	-	-	153.2
295.3	38.8*	139.1	157.6	-	-	-	151.0
308.4	33.1*	132.9	156.5	138.0	-	-	147.7
321.5	27.8*	126.5	154.8	138.0	-	-	144.4
334.6	22.9*	120.2	151.9	138.0	-	-	141.1
347.8	18.5*	114.0	147.5	138.0	-	-	138.9
360.9	14.3*	107.6	137.8	138.0	-	-	135.6
374.0	-	-	127.6	138.0	-	-	130.1
387.1	-	-	118.2	138.0	119.9	-	124.6
400.3	-	-	109.1	133.4	119.7	-	119.0
413.4	-	-	-	123.5	114.4	-	106.5
426.5	-	-	-	114.4	107.8	-	95.7
439.6	-	-	-	-	101.6	-	87.7
452.8	-	-	-	-	95.7	74.5	76.9
465.9	-	-	-	-	90.6	69.4	65.3
479.0	-	-	-	-	-	64.8	54.0
492.1	-	-	-	-	-	60.4	44.3
518.4	-	-	-	-	-	-	26.7

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb
	705,600 lb	882,000 lb	992,100 lb	

216.5 ft + 118.1 ft							
SWSL							SFSL
0 lb		176,400 lb – 992,100 lb					
		87°/85°	87°/85°	75°	65°	55°	45°
ft	1,000 lb						
52.5	630.5*	835.6*	-	-	-	-	-
59.1	568.8*	824.5*	-	-	-	-	-
65.6	515.9*	857.6	-	-	-	-	811.3
72.2	474.0*	848.8	-	-	-	-	811.3
78.7	436.5*	833.3	-	-	-	-	811.3
85.3	404.5*	813.5	-	-	-	-	811.3
91.9	377.0*	793.7	-	-	-	-	800.3
98.4	350.5*	773.8	-	-	-	-	800.3
111.5	297.6*	696.7	-	-	-	-	784.8
124.7	256.8*	593.0	751.8	-	-	-	738.5
131.2	239.2*	551.2	712.1	-	-	-	696.7
137.8	213.0	513.7	672.4	-	-	-	654.8
150.9	-	-	606.3	-	-	-	584.2
164.0	-	-	551.2	-	-	-	524.7
177.2	-	-	504.9	478.4	-	-	474.0
190.3	-	-	-	440.9	-	-	429.9
203.4	-	-	-	407.9	-	-	392.4
216.5	-	-	-	-	-	-	357.1
229.7	-	-	-	-	332.9	-	328.5
242.8	-	-	-	-	312.0	-	295.4
255.9	-	-	-	-	-	-	260.1
269.0	-	-	-	-	-	-	229.3
282.2	-	-	-	-	-	-	208.3
295.3	-	-	-	-	-	-	181.9
308.4	-	-	-	-	-	-	153.2

216.5 ft + 157.5 ft							
1,000 lb							
62.3	507.1*	654.8*	-	-	-	-	-
65.6	485.0*	654.8*	-	-	-	-	-
72.2	445.3*	646.0*	-	-	-	-	-
78.7	411.2*	672.4	-	-	-	-	639.3
85.3	381.4*	668.0	-	-	-	-	639.3
91.9	354.9*	659.2	-	-	-	-	639.3
98.4	331.8*	648.2	-	-	-	-	639.3
111.5	292.1*	623.9	-	-	-	-	639.3
124.7	251.3*	599.7	-	-	-	-	623.9
137.8	219.4*	551.2	665.8	-	-	-	617.3
150.9	192.9*	485.0	601.9	-	-	-	590.8
164.0	170.9*	432.1	546.7	-	-	-	529.1
177.2	143.3	381.4	498.2	-	-	-	478.4
190.3	-	-	458.6	-	-	-	434.3
203.4	-	-	425.5	401.2	-	-	396.8
216.5	-	-	383.6	372.6	-	-	361.6
229.7	-	-	-	347.2	-	-	332.9
242.8	-	-	-	325.2	-	-	306.4
255.9	-	-	-	-	283.3	-	282.2
269.0	-	-	-	-	265.7	-	253.5
282.2	-	-	-	-	250.2	-	227.1
295.3	-	-	-	-	-	196.0	200.6
308.4	-	-	-	-	-	185.4	179.7
321.5	-	-	-	-	-	-	163.1
334.6	-	-	-	-	-	-	140.0
347.8	-	-	-	-	-	-	116.8

374,800 – 551,200 lb + 0 – 176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
216.5 ft + 196.9 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
72.2	418.9*	513.7*	-	-	-	-	-	-	-
78.7	386.9*	511.5*	-	-	-	-	-	-	-
85.3	359.4*	524.7	-	-	-	-	-	-	-
91.9	334.0*	524.7	-	-	-	-	-	504.9	-
98.4	312.0*	522.5	-	-	-	-	-	504.9	-
111.5	275.6*	515.9	-	-	-	-	-	504.9	-
124.7	244.7*	502.7	-	-	-	-	-	504.9	-
137.8	220.5*	487.2	-	-	-	-	-	498.2	-
150.9	194.4*	471.8	-	-	-	-	-	493.8	-
157.5	182.5*	463.0	518.1	-	-	-	-	491.6	-
164.0	171.7*	445.3	513.7	-	-	-	-	489.4	-
177.2	152.8*	411.2	502.7	-	-	-	-	469.6	-
190.3	136.2*	371.5	463.0	-	-	-	-	443.1	-
203.4	122.1*	330.7	427.7	-	-	-	-	405.7	-
216.5	102.1	280.0	396.8	-	-	-	-	370.4	-
229.7	-	-	367.1	347.2	-	-	-	339.5	-
242.8	-	-	335.1	325.2	-	-	-	313.1	-
255.9	-	-	294.3	304.2	-	-	-	288.8	-
269.0	-	-	-	286.6	-	-	-	266.8	-
282.2	-	-	-	270.1	246.9	-	-	246.9	-
295.3	-	-	-	-	231.5	-	-	224.9	-
308.4	-	-	-	-	218.7	-	-	201.7	-
321.5	-	-	-	-	206.6	-	-	179.7	-
334.6	-	-	-	-	-	162.0	-	157.6	-
347.8	-	-	-	-	-	153.9	-	145.5	-
360.9	-	-	-	-	-	-	127.9	-	-
374.0	-	-	-	-	-	-	-	108.7	-
387.1	-	-	-	-	-	-	-	92.4	-

216.5 ft + 236.2 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
78.7	361.6*	402.3*	-	-	-	-	-	-	-
85.3	335.1*	401.2*	-	-	-	-	-	-	-
91.9	312.0*	397.9*	-	-	-	-	-	-	-
98.4	292.1*	406.8	-	-	-	-	-	-	-
111.5	256.8*	402.3	-	-	-	-	-	392.4	-
124.7	228.2*	396.8	-	-	-	-	-	392.4	-
137.8	204.6*	390.2	-	-	-	-	-	392.4	-
150.9	182.3*	382.5	-	-	-	-	-	392.4	-
164.0	160.7*	373.7	-	-	-	-	-	392.4	-
177.2	142.4*	366.0	390.2	-	-	-	-	390.2	-
190.3	126.5*	354.9	389.1	-	-	-	-	377.0	-
203.4	113.1*	332.9	386.9	-	-	-	-	368.2	-
216.5	101.0*	303.1	383.6	-	-	-	-	359.4	-
229.7	90.6*	273.4	357.1	-	-	-	-	341.7	-
242.8	81.1*	240.3	329.6	312.0	-	-	-	315.3	-
255.9	65.9	205.0	300.9	292.1	-	-	-	288.8	-
269.0	-	-	275.6	274.5	-	-	-	266.8	-
282.2	-	-	252.4	259.0	-	-	-	246.9	-
295.3	-	-	-	244.7	-	-	-	229.3	-
308.4	-	-	-	231.5	206.1	-	-	212.7	-
321.5	-	-	-	219.6	194.2	-	-	190.7	-
334.6	-	-	-	-	183.2	-	-	170.9	-
347.8	-	-	-	-	173.1	-	-	152.1	-
360.9	-	-	-	-	163.6	135.6	-	134.5	-
374.0	-	-	-	-	-	128.8	-	123.5	-
387.1	-	-	-	-	-	122.6	-	110.0	-
400.3	-	-	-	-	-	-	-	93.7	-
413.4	-	-	-	-	-	-	-	77.2	-
426.5	-	-	-	-	-	-	-	67.7	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0 – 176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
216.5 ft + 275.6 ft									
SWSL SFSL 0 lb 176,400 lb – 992,100 lb 87°/85° 87°/85° 75° 65° 55° 45°									
ft 1,000 lb									
91.9	295.4*	310.9*	-	-	-	-	-	-	-
98.4	275.6*	308.6*	-	-	-	-	-	-	-
105.0	259.0*	312.0	-	-	-	-	-	-	-
111.5	242.5*	312.0	-	-	-	-	-	-	-
124.7	215.2*	308.6	-	-	-	-	-	302.0	-
137.8	192.2*	305.3	-	-	-	-	-	302.0	-
150.9	172.8*	300.9	-	-	-	-	-	302.0	-
164.0	156.1*	296.5	-	-	-	-	-	302.0	-
177.2	137.8*	291.0	-	-	-	-	-	302.0	-
190.3	122.1*	286.6	294.3	-	-	-	-	302.0	-
203.4	108.5*	281.1	294.3	-	-	-	-	297.6	-
216.5	96.6*	276.7	294.3	-	-	-	-	291.0	-
229.7	86.0*	272.3	293.2	-	-	-	-	284.4	-
242.8	76.7*	253.5	292.1	-	-	-	-	280.0	-
255.9	68.3*	232.6	291.0	-	-	-	-	275.6	-
269.0	60.8*	211.2	273.4	261.2	-	-	-	269.0	-
282.2	54.0*	186.7	251.3	253.5	-	-	-	249.1	-
295.3	-	-	231.5	239.2	-	-	-	231.5	-
308.4	-	-	214.5	226.0	-	-	-	215.0	-
321.5	-	-	197.8	214.7	-	-	-	199.5	-
334.6	-	-	-	203.5	175.9	-	-	184.1	-
347.8	-	-	-	193.3	166.0	-	-	165.3	-
360.9	-	-	-	183.9	156.7	-	-	148.8	-
374.0	-	-	-	-	148.2	-	-	132.3	-
387.1	-	-	-	-	140.0	-	-	116.8	-
400.3	-	-	-	-	132.5	108.2	-	106.0	-
413.4	-	-	-	-	-	102.1	-	95.9	-
426.5	-	-	-	-	-	96.3	-	81.8	-
439.6	-	-	-	-	-	-	-	67.9	-
452.8	-	-	-	-	-	-	-	56.9	-

216.5 ft + 315.0 ft									
SWSL SFSL 0 lb 176,400 lb – 992,100 lb 87°/85° 87°/85° 75° 65° 55° 45°									
ft 1,000 lb									
98.4	227.1*	235.9*	-	-	-	-	-	-	-
111.5	222.7*	233.7*	-	-	-	-	-	-	-
118.1	212.2*	234.8	-	-	-	-	-	-	-
124.7	201.7*	234.8	-	-	-	-	-	-	-
137.8	179.7*	231.5	-	-	-	-	-	229.3	-
150.9	160.9*	228.2	-	-	-	-	-	227.1	-
164.0	144.8*	224.9	-	-	-	-	-	227.1	-
177.2	131.0*	221.6	-	-	-	-	-	227.1	-
190.3	117.1*	217.8	-	-	-	-	-	224.9	-
203.4	103.4*	213.6	215.6	-	-	-	-	222.7	-
216.5	91.5*	209.7	215.6	-	-	-	-	220.5	-
229.7	80.9*	205.5	215.6	-	-	-	-	216.1	-
242.8	71.7*	200.8	215.4	-	-	-	-	212.7	-
255.9	63.3*	195.6	214.3	-	-	-	-	209.4	-
269.0	55.8*	189.8	212.7	-	-	-	-	206.1	-
282.2	48.9*	184.1	210.3	-	-	-	-	201.7	-
295.3	42.8*	178.6	208.3	187.6	-	-	-	198.4	-
308.4	37.0*	164.2	206.1	187.6	-	-	-	195.1	-
321.5	31.7*	145.3	196.0	187.4	-	-	-	190.7	-
334.6	-	-	181.7	187.4	-	-	-	186.3	-
347.8	-	-	168.4	187.4	-	-	-	172.0	-
360.9	-	-	155.2	178.8	149.5	-	-	157.6	-
374.0	-	-	-	170.0	140.9	-	-	142.2	-
387.1	-	-	-	161.8	132.9	-	-	127.9	-
400.3	-	-	-	154.1	125.4	-	-	113.5	-
413.4	-	-	-	-	118.4	-	-	100.3	-
426.5	-	-	-	-	112.0	88.6	-	89.7	-
439.6	-	-	-	-	-	83.1	-	81.8	-
452.8	-	-	-	-	-	78.0	-	69.7	-
465.9	-	-	-	-	-	73.2	-	57.5	-
479.0	-	-	-	-	-	-	-	45.4	-
492.1	-	-	-	-	-	-	-	36.8	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
216.5 ft + 354.3 ft									
SWSL					SFSL				
0 lb 176,400 lb – 992,100 lb					0 lb 176,400 lb – 992,100 lb				
ft	87°/85°	87°/85°	75°	65°	55°	45°	ft	87°/85°	87°/85°
1,000 lb									
105.0	169.1*	176.8*	-	-	-	-	52.5	604.1*	762.8*
111.5	169.1*	176.8*	-	-	-	-	59.1	546.7*	756.2*
124.7	168.0*	174.8	-	-	-	-	65.6	498.2*	782.6
137.8	164.2*	173.7	-	-	-	-	72.2	456.4*	778.2
150.9	149.7*	171.7	-	-	-	169.8	78.7	422.2*	765.0
164.0	134.0*	169.3	-	-	-	168.7	85.3	391.3*	747.4
177.2	120.6*	167.1	-	-	-	167.6	91.9	364.9*	729.7
190.3	108.7*	164.5	-	-	-	166.4	98.4	341.7*	712.1
203.4	97.9*	161.6	-	-	-	164.2	111.5	294.3*	676.8
216.5	87.1*	158.7	-	-	-	162.0	124.7	253.5*	604.1
229.7	76.3*	155.9	155.0	-	-	159.8	131.2	235.9*	560.0
242.8	67.0*	153.2	155.0	-	-	157.6	137.8	208.8*	522.5
255.9	58.6*	150.4	154.8	-	-	155.4	144.4	195.1*	489.4
269.0	50.9*	146.6	154.5	-	-	152.1	150.9	-	597.5
282.2	44.1*	141.5	153.9	-	-	148.8	164.0	-	544.5
295.3	37.9*	136.0	152.8	-	-	146.6	177.2	-	498.2
308.4	32.2*	130.7	151.9	-	-	143.3	190.3	-	431.0
321.5	26.9*	125.2	150.4	132.1	-	141.1	203.4	-	397.9
334.6	22.3*	119.7	148.6	132.1	-	137.8	216.5	-	370.4
347.8	17.6*	114.4	145.5	132.1	-	135.6	229.7	-	-
360.9	13.4*	108.9	142.0	132.1	-	132.3	242.8	-	300.9
374.0	-	-	138.2	132.1	-	127.9	255.9	-	282.2
387.1	-	-	132.7	132.1	-	123.5	269.0	-	-
400.3	-	-	121.9	132.1	114.4	117.9	282.2	-	-
413.4	-	-	-	132.1	111.8	109.3	295.3	-	-
426.5	-	-	-	131.0	105.4	96.8	308.4	-	-
439.6	-	-	-	121.7	99.2	84.7	321.5	-	-
452.8	-	-	-	-	93.5	75.0			
465.9	-	-	-	-	88.0	67.7			
479.0	-	-	-	-	-	65.9			
492.1	-	-	-	-	-	61.5			
505.3	-	-	-	-	-	57.1			
518.4	-	-	-	-	-	53.1			
531.5	-	-	-	-	-	25.8			
						19.2			

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

0 lb	176,400 lb	352,800 lb	529,200 lb
705,600 lb	882,000 lb	992,100 lb	

236.2 ft + 118.1 ft									
SWSL					SFSL				
0 lb 176,400 lb – 992,100 lb					0 lb 176,400 lb – 992,100 lb				
ft	87°/85°	87°/85°	75°	65°	55°	45°	ft	87°/85°	87°/85°
1,000 lb									
52.5	604.1*	762.8*	-	-	-	-	52.5	604.1*	762.8*
59.1	546.7*	756.2*	-	-	-	-	59.1	546.7*	756.2*
65.6	498.2*	782.6	-	-	-	740.8	65.6	498.2*	782.6
72.2	456.4*	778.2	-	-	-	740.8	72.2	456.4*	778.2
78.7	422.2*	765.0	-	-	-	740.8	78.7	422.2*	765.0
85.3	391.3*	747.4	-	-	-	740.8	85.3	391.3*	747.4
91.9	364.9*	729.7	-	-	-	740.8	91.9	364.9*	729.7
98.4	341.7*	712.1	-	-	-	729.7	98.4	341.7*	712.1
111.5	294.3*	676.8	-	-	-	720.9	111.5	294.3*	676.8
124.7	253.5*	604.1	-	-	-	714.3	124.7	253.5*	604.1
131.2	235.9*	560.0	698.9	-	-	680.1	131.2	235.9*	560.0
137.8	208.8*	522.5	663.6	-	-	646.0	137.8	208.8*	522.5
144.4	195.1*	489.4	630.5	-	-	610.7	144.4	195.1*	489.4
150.9	-	-	597.5	-	-	575.4	150.9	-	597.5
164.0	-	-	544.5	-	-	515.9	164.0	-	544.5
177.2	-	-	498.2	-	-	465.2	177.2	-	498.2
190.3	-	-	-	431.0	-	421.1	190.3	-	-
203.4	-	-	-	397.9	-	383.6	203.4	-	-
216.5	-	-	-	370.4	-	350.5	216.5	-	-
229.7	-	-	-	-	-	319.7	229.7	-	-
242.8	-	-	-	-	300.9	293.2	242.8	-	-
255.9	-	-	-	-	282.2	266.8	255.9	-	-
269.0	-	-	-	-	-	235.9	269.0	-	-
282.2	-	-	-	-	-	208.3	282.2	-	-
295.3	-	-	-	-	-	183.0	295.3	-	-
308.4	-	-	-	-	-	166.4	308.4	-	-
321.5	-	-	-	-	-	140.0	321.5	-	-

 374,800 – 551,200 lb +  0 – 176,400 lb  49.2–78.7 ft  31.50 ft  32.2 ft/s 360° 75%									
 236.2 ft +  196.9 ft									
 SWSL  SFSL									
 0 lb  176,400 lb – 992,100 lb									
 87°/85°  87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
72.2	403.4*	478.4*	-	-	-	-	-	-	-
78.7	373.7*	476.2*	-	-	-	-	-	-	-
85.3	346.1*	487.2	-	-	-	-	-	-	-
91.9	323.0*	487.2	-	-	-	-	-	467.4	-
98.4	302.0*	485.0	-	-	-	-	-	467.4	-
111.5	266.8*	478.4	-	-	-	-	-	467.4	-
124.7	238.1*	467.4	-	-	-	-	-	467.4	-
137.8	213.8*	451.9	-	-	-	-	-	467.4	-
150.9	192.2*	438.7	-	-	-	-	-	460.8	-
164.0	169.8*	424.4	485.0	-	-	-	-	456.4	-
177.2	150.8*	400.1	478.4	-	-	-	-	438.7	-
190.3	134.5*	375.9	456.4	-	-	-	-	425.5	-
203.4	120.4*	338.4	421.1	-	-	-	-	399.0	-
216.5	99.4	288.8	391.3	-	-	-	-	363.8	-
229.7	-	-	363.8	337.3	-	-	-	332.9	-
242.8	-	-	340.6	315.3	-	-	-	306.4	-
255.9	-	-	315.3	296.5	-	-	-	282.2	-
269.0	-	-	-	278.9	-	-	-	260.1	-
282.2	-	-	-	262.4	-	-	-	240.3	-
295.3	-	-	-	248.0	224.9	-	-	220.5	-
308.4	-	-	-	-	212.7	-	-	205.0	-
321.5	-	-	-	-	200.6	-	-	183.0	-
334.6	-	-	-	-	189.6	-	-	162.0	-
347.8	-	-	-	-	-	142.2	-	142.2	-
360.9	-	-	-	-	-	135.1	-	126.8	-
374.0	-	-	-	-	-	-	114.6	114.6	-
387.1	-	-	-	-	-	-	-	97.4	-
400.3	-	-	-	-	-	-	-	79.4	-

 236.2 ft +  236.2 ft									
 SWSL  SFSL									
 0 lb  176,400 lb – 992,100 lb									
 87°/85°  87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
85.3	324.1*	375.9*	-	-	-	-	-	-	-
91.9	302.0*	373.7*	-	-	-	-	-	-	-
98.4	282.2*	380.3	-	-	-	-	-	-	-
111.5	248.0*	378.1	-	-	-	-	-	368.2	-
124.7	220.5*	373.7	-	-	-	-	-	368.2	-
137.8	198.0*	367.1	-	-	-	-	-	368.2	-
150.9	178.4*	359.4	-	-	-	-	-	368.2	-
164.0	158.7*	351.6	-	-	-	-	-	368.2	-
177.2	140.4*	343.9	368.2	-	-	-	-	366.0	-
190.3	125.0*	336.2	366.0	-	-	-	-	357.1	-
203.4	111.3*	325.2	364.9	-	-	-	-	346.1	-
216.5	99.4*	307.5	362.7	-	-	-	-	337.3	-
229.7	89.1*	278.9	351.6	-	-	-	-	328.5	-
242.8	79.6*	245.8	328.5	-	-	-	-	308.6	-
255.9	63.7	211.4	308.6	284.4	-	-	-	284.4	-
269.0	-	-	286.6	266.8	-	-	-	260.1	-
282.2	-	-	262.4	251.3	-	-	-	240.3	-
295.3	-	-	232.6	237.0	-	-	-	222.7	-
308.4	-	-	-	224.9	-	-	-	206.1	-
321.5	-	-	-	213.2	188.3	-	-	190.7	-
334.6	-	-	-	202.2	177.5	-	-	173.1	-
347.8	-	-	-	-	167.6	-	-	154.3	-
360.9	-	-	-	-	158.3	-	-	137.8	-
374.0	-	-	-	-	149.7	117.7	-	120.2	-
387.1	-	-	-	-	-	111.8	106.9	106.9	-
400.3	-	-	-	-	-	-	106.3	97.4	-
413.4	-	-	-	-	-	-	-	82.7	-
426.5	-	-	-	-	-	-	-	67.5	-
439.6	-	-	-	-	-	-	-	54.2	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
---	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
236.2 ft + 275.6 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
91.9	277.8*	291.0*	-	-	-	-	-	-	-
98.4	265.7*	289.9*	-	-	-	-	-	-	-
111.5	233.7*	293.2	-	-	-	-	-	-	-
124.7	207.9*	289.9	-	-	-	-	-	284.4	-
137.8	185.6*	286.6	-	-	-	-	-	284.4	-
150.9	166.9*	283.3	-	-	-	-	-	284.4	-
164.0	150.6*	278.9	-	-	-	-	-	284.4	-
177.2	136.0*	273.4	-	-	-	-	-	284.4	-
190.3	120.4*	269.0	-	-	-	-	-	284.4	-
203.4	106.9*	264.6	276.7	-	-	-	-	284.4	-
216.5	95.0*	259.0	276.7	-	-	-	-	273.4	-
229.7	84.7*	254.6	275.6	-	-	-	-	266.8	-
242.8	75.4*	250.2	274.5	-	-	-	-	262.4	-
255.9	67.0*	237.0	273.4	-	-	-	-	257.9	-
269.0	59.5*	215.4	272.3	-	-	-	-	251.3	-
282.2	52.7*	190.9	261.2	245.8	-	-	-	242.5	-
295.3	39.7	164.7	240.3	232.6	-	-	-	224.9	-
308.4	-	-	221.6	219.8	-	-	-	208.3	-
321.5	-	-	205.5	208.1	-	-	-	192.9	-
334.6	-	-	183.0	197.3	-	-	-	178.6	-
347.8	-	-	-	187.4	160.1	-	-	165.3	-
360.9	-	-	-	178.1	151.0	-	-	149.9	-
374.0	-	-	-	169.5	142.6	-	-	133.4	-
387.1	-	-	-	-	134.7	-	-	117.9	-
400.3	-	-	-	-	127.4	-	-	104.3	-
413.4	-	-	-	-	-	92.8	-	90.8	-
426.5	-	-	-	-	-	88.2	-	82.2	-
439.6	-	-	-	-	-	83.8	-	71.2	-
452.8	-	-	-	-	-	-	58.2	-	-
465.9	-	-	-	-	-	-	-	45.2	-
479.0	-	-	-	-	-	-	-	34.6	-

236.2 ft + 315.0 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
98.4	215.8*	223.8*	-	-	-	-	-	-	-
111.5	211.9*	221.6*	-	-	-	-	-	-	-
118.1	203.2*	222.7	-	-	-	-	-	-	-
124.7	194.4*	222.7	-	-	-	-	-	-	-
137.8	173.3*	220.5	-	-	-	-	-	217.2	-
150.9	155.2*	218.0	-	-	-	-	-	217.2	-
164.0	139.6*	215.2	-	-	-	-	-	217.2	-
177.2	125.9*	211.6	-	-	-	-	-	217.2	-
190.3	114.0*	207.7	-	-	-	-	-	215.0	-
203.4	101.9*	203.7	-	-	-	-	-	213.8	-
216.5	89.9*	200.0	205.5	-	-	-	-	211.6	-
229.7	79.6*	196.0	205.5	-	-	-	-	208.3	-
242.8	70.3*	191.8	205.5	-	-	-	-	203.9	-
255.9	61.9*	187.6	205.3	-	-	-	-	200.6	-
269.0	54.5*	183.2	203.9	-	-	-	-	197.3	-
282.2	47.6*	179.0	202.6	-	-	-	-	194.0	-
295.3	41.4*	174.6	200.4	178.4	-	-	-	191.8	-
308.4	35.9*	167.3	198.9	178.4	-	-	-	187.4	-
321.5	30.6*	148.6	197.1	177.9	-	-	-	184.1	-
334.6	19.6	128.1	188.1	177.9	-	-	-	179.7	-
347.8	-	-	174.4	177.9	-	-	-	166.4	-
360.9	-	-	161.8	172.6	-	-	-	153.2	-
374.0	-	-	143.7	164.2	135.1	-	-	142.2	-
387.1	-	-	-	156.1	127.4	-	-	127.9	-
400.3	-	-	-	148.8	120.2	-	-	113.5	-
413.4	-	-	-	142.0	113.3	-	-	101.2	-
426.5	-	-	-	-	106.9	-	-	88.4	-
439.6	-	-	-	-	101.0	75.6	-	76.1	-
452.8	-	-	-	-	-	71.4	-	68.1	-
465.9	-	-	-	-	-	67.2	-	59.5	-
479.0	-	-	-	-	-	63.1	-	48.1	-
492.1	-	-	-	-	-	-	-	36.8	-
518.4	-	-	-	-	-	-	-	16.8	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
---	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
236.2 ft + 354.3 ft									
SWSL SFSL 0 lb 176,400 lb – 992,100 lb 87°/85° 87°/85° 75° 65° 55° 45° ft 1,000 lb									
111.5	160.7*	168.2*	-	-	-	-	-	-	-
124.7	160.1*	165.8*	-	-	-	-	-	-	-
131.2	158.1*	166.2	-	-	-	-	-	-	-
137.8	156.1*	165.8	-	-	-	-	-	-	-
150.9	144.0*	163.8	-	-	-	-	-	162.0	-
164.0	128.8*	161.8	-	-	-	-	-	160.9	-
177.2	115.5*	159.6	-	-	-	-	-	159.8	-
190.3	104.1*	157.2	-	-	-	-	-	159.8	-
203.4	93.7*	154.8	-	-	-	-	-	157.6	-
216.5	84.4*	151.9	-	-	-	-	-	155.4	-
229.7	75.0*	149.3	147.7	-	-	-	-	154.3	-
242.8	65.7*	146.6	147.7	-	-	-	-	152.1	-
255.9	57.3*	143.7	147.7	-	-	-	-	148.8	-
269.0	49.8*	140.7	147.7	-	-	-	-	146.6	-
282.2	43.0*	136.5	147.5	-	-	-	-	143.3	-
295.3	36.8*	131.8	146.8	-	-	-	-	141.1	-
308.4	31.1*	127.2	146.2	-	-	-	-	138.9	-
321.5	26.0*	122.8	145.5	125.4	-	-	-	136.7	-
334.6	21.2*	118.2	144.0	125.4	-	-	-	133.4	-
347.8	16.8*	113.5	142.2	125.4	-	-	-	131.2	-
360.9	12.6*	108.9	139.6	125.2	-	-	-	127.9	-
374.0	-	-	136.7	125.2	-	-	-	125.7	-
387.1	-	-	134.3	125.2	-	-	-	121.3	-
400.3	-	-	127.6	125.0	108.0	-	-	115.7	-
413.4	-	-	112.7	125.0	106.5	-	-	109.1	-
426.5	-	-	-	125.0	100.1	-	-	96.8	-
439.6	-	-	-	122.6	94.1	-	-	84.9	-
452.8	-	-	-	117.1	88.6	-	-	73.6	-
465.9	-	-	-	-	83.3	-	-	62.8	-
479.0	-	-	-	-	78.3	55.6	-	57.3	-
492.1	-	-	-	-	-	51.4	-	48.1	-
518.4	-	-	-	-	-	43.9	-	28.0	-
531.5	-	-	-	-	-	-	-	17.9	-

255.9 ft + 118.1 ft									
SWSL SFSL 0 lb 176,400 lb – 992,100 lb 87°/85° 87°/85° 75° 65° 55° 45° ft 1,000 lb									
55.8	553.4*	690.0*	-	-	-	-	-	-	-
59.1	526.9*	690.0*	-	-	-	-	-	-	-
65.6	480.6*	679.0*	-	-	-	-	-	-	-
72.2	440.9*	707.7	-	-	-	-	-	676.8	-
78.7	407.9*	698.9	-	-	-	-	-	676.8	-
85.3	379.2*	687.8	-	-	-	-	-	676.8	-
91.9	353.8*	672.4	-	-	-	-	-	676.8	-
98.4	330.7*	657.0	-	-	-	-	-	676.8	-
111.5	291.0*	626.1	-	-	-	-	-	668.0	-
124.7	250.2*	597.5	-	-	-	-	-	659.2	-
131.2	233.7*	571.0	687.8	-	-	-	-	646.0	-
137.8	204.6	531.3	652.6	-	-	-	-	639.3	-
144.4	191.1	496.0	621.7	-	-	-	-	604.1	-
150.9	-	-	590.8	-	-	-	-	568.8	-
164.0	-	-	535.7	-	-	-	-	509.3	-
177.2	-	-	489.4	-	-	-	-	458.6	-
190.3	-	-	451.9	420.0	-	-	-	414.5	-
203.4	-	-	-	389.1	-	-	-	377.0	-
216.5	-	-	-	361.6	-	-	-	343.9	-
229.7	-	-	-	337.3	-	-	-	313.1	-
242.8	-	-	-	-	-	-	-	286.6	-
255.9	-	-	-	-	272.3	-	-	262.4	-
269.0	-	-	-	-	255.7	-	-	240.3	-
282.2	-	-	-	-	-	-	-	213.8	-
295.3	-	-	-	-	-	-	-	187.4	-
308.4	-	-	-	-	-	-	-	163.1	-
321.5	-	-	-	-	-	-	-	146.6	-
334.6	-	-	-	-	-	-	-	126.8	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
255.9 ft + 157.5 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
62.3	471.8*	555.6*	-	-	-	-	-	-	-
65.6	449.7*	555.6*	-	-	-	-	-	-	-
72.2	414.5*	549.0*	-	-	-	-	-	-	-
78.7	383.6*	566.6	-	-	-	-	-	-	-
85.3	356.0*	564.4	-	-	-	-	-	540.1	-
91.9	332.9*	557.8	-	-	-	-	-	540.1	-
98.4	310.9*	551.2	-	-	-	-	-	540.1	-
111.5	275.6*	533.5	-	-	-	-	-	540.1	-
124.7	245.8*	513.7	-	-	-	-	-	540.1	-
137.8	214.1*	493.8	-	-	-	-	-	533.5	-
150.9	187.8*	474.0	562.2	-	-	-	-	524.7	-
164.0	166.2*	443.1	531.3	-	-	-	-	502.7	-
177.2	136.2	396.8	485.0	-	-	-	-	465.2	-
190.3	-	-	445.3	-	-	-	-	421.1	-
203.4	-	-	413.4	-	-	-	-	383.6	-
216.5	-	-	383.6	353.8	-	-	-	348.3	-
229.7	-	-	-	329.6	-	-	-	319.7	-
242.8	-	-	-	308.6	-	-	-	291.0	-
255.9	-	-	-	289.9	-	-	-	266.8	-
269.0	-	-	-	272.3	-	-	-	244.7	-
282.2	-	-	-	-	232.6	-	-	224.9	-
295.3	-	-	-	-	220.5	-	-	208.3	-
308.4	-	-	-	-	209.2	-	-	185.2	-
321.5	-	-	-	-	-	-	-	163.1	-
334.6	-	-	-	-	-	-	-	142.2	-
347.8	-	-	-	-	-	-	-	125.7	-
360.9	-	-	-	-	-	-	-	112.4	-
374.0	-	-	-	-	-	-	-	94.1	-

255.9 ft + 196.9 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
72.2	389.1*	443.1*	-	-	-	-	-	-	-
78.7	360.5*	440.9*	-	-	-	-	-	-	-
85.3	335.1*	437.6*	-	-	-	-	-	-	-
91.9	312.0*	451.9	-	-	-	-	-	-	-
98.4	292.1*	449.7	-	-	-	-	-	432.1	-
111.5	257.9*	440.9	-	-	-	-	-	432.1	-
124.7	230.4*	432.1	-	-	-	-	-	432.1	-
137.8	207.2*	420.0	-	-	-	-	-	432.1	-
150.9	187.4*	406.8	-	-	-	-	-	429.9	-
164.0	167.8*	394.6	447.5	-	-	-	-	427.7	-
177.2	148.8*	382.5	443.1	-	-	-	-	414.5	-
190.3	132.7*	364.9	440.9	-	-	-	-	399.0	-
203.4	118.8*	345.0	415.6	-	-	-	-	385.8	-
216.5	96.8	296.5	384.7	-	-	-	-	357.1	-
229.7	-	-	359.4	-	-	-	-	328.5	-
242.8	-	-	335.1	305.3	-	-	-	299.8	-
255.9	-	-	314.2	286.6	-	-	-	275.6	-
269.0	-	-	-	270.1	-	-	-	253.5	-
282.2	-	-	-	255.7	-	-	-	233.7	-
295.3	-	-	-	241.4	-	-	-	216.1	-
308.4	-	-	-	228.2	203.9	-	-	198.4	-
321.5	-	-	-	-	193.6	-	-	183.0	-
334.6	-	-	-	-	182.8	-	-	164.2	-
347.8	-	-	-	-	172.8	-	-	145.5	-
360.9	-	-	-	-	-	126.8	-	127.9	-
374.0	-	-	-	-	-	119.7	-	110.2	-
387.1	-	-	-	-	-	-	-	100.1	-
400.3	-	-	-	-	-	-	-	86.0	-
413.4	-	-	-	-	-	-	-	69.4	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
255.9 ft + 236.2 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
85.3	313.1*	351.6*	-	-	-	-	-	-	-
91.9	291.0*	349.4*	-	-	-	-	-	-	-
98.4	272.3*	356.0	-	-	-	-	-	-	-
111.5	240.3*	354.9	-	-	-	-	-	-	-
124.7	213.6*	350.5	-	-	-	-	-	-	343.9
137.8	191.4*	345.0	-	-	-	-	-	-	343.9
150.9	172.4*	338.4	-	-	-	-	-	-	343.9
164.0	156.1*	330.7	-	-	-	-	-	-	343.9
177.2	138.7*	323.0	-	-	-	-	-	-	343.9
190.3	123.2*	316.4	345.0	-	-	-	-	-	339.5
203.4	109.8*	307.5	343.9	-	-	-	-	-	326.3
216.5	97.9*	299.8	340.6	-	-	-	-	-	317.5
229.7	87.5*	283.3	338.4	-	-	-	-	-	308.6
242.8	78.3*	251.3	324.1	-	-	-	-	-	302.0
255.9	61.5	217.4	303.1	-	-	-	-	-	277.8
269.0	-	-	285.5	260.1	-	-	-	-	255.7
282.2	-	-	269.0	244.7	-	-	-	-	235.9
295.3	-	-	246.9	230.4	-	-	-	-	217.2
308.4	-	-	-	218.5	-	-	-	-	200.6
321.5	-	-	-	207.0	-	-	-	-	184.1
334.6	-	-	-	196.2	170.4	-	-	-	169.8
347.8	-	-	-	-	160.7	-	-	-	155.4
360.9	-	-	-	-	151.9	-	-	-	138.9
374.0	-	-	-	-	143.5	-	-	-	122.4
387.1	-	-	-	-	-	-	-	-	107.1
400.3	-	-	-	-	-	-	-	95.9	92.2
413.4	-	-	-	-	-	-	-	91.1	82.5
426.5	-	-	-	-	-	-	-	-	71.4
439.6	-	-	-	-	-	-	-	-	57.5
452.8	-	-	-	-	-	-	-	-	43.4

255.9 ft + 275.6 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
91.9	263.5*	274.5*	-	-	-	-	-	-	-
98.4	256.8*	273.4*	-	-	-	-	-	-	-
111.5	226.0*	275.6	-	-	-	-	-	-	-
124.7	200.6*	273.4	-	-	-	-	-	-	266.8
137.8	179.2*	271.2	-	-	-	-	-	-	266.8
150.9	160.9*	267.9	-	-	-	-	-	-	266.8
164.0	145.3*	263.5	-	-	-	-	-	-	266.8
177.2	131.6*	259.0	-	-	-	-	-	-	266.8
190.3	118.8*	254.6	-	-	-	-	-	-	266.8
203.4	105.4*	250.2	263.5	-	-	-	-	-	266.8
216.5	93.5*	245.8	262.4	-	-	-	-	-	260.1
229.7	83.1*	241.4	262.4	-	-	-	-	-	253.5
242.8	73.9*	235.9	260.1	-	-	-	-	-	246.9
255.9	65.7*	231.5	260.1	-	-	-	-	-	242.5
269.0	58.2*	219.1	257.9	-	-	-	-	-	238.1
282.2	51.6*	194.9	257.9	232.6	-	-	-	-	233.7
295.3	37.9	169.1	249.1	224.9	-	-	-	-	220.5
308.4	-	-	229.3	213.0	-	-	-	-	202.8
321.5	-	-	212.5	201.5	-	-	-	-	187.4
334.6	-	-	193.6	191.1	-	-	-	-	173.1
347.8	-	-	-	181.4	-	-	-	-	158.7
360.9	-	-	-	172.4	144.4	-	-	-	146.6
374.0	-	-	-	164.0	136.2	-	-	-	133.4
387.1	-	-	-	-	128.5	-	-	-	119.0
400.3	-	-	-	-	121.5	-	-	-	104.9
413.4	-	-	-	-	114.9	-	-	-	91.5
426.5	-	-	-	-	-	-	-	78.3	78.3
439.6	-	-	-	-	-	-	-	74.1	69.0
452.8	-	-	-	-	-	-	-	70.1	60.4
465.9	-	-	-	-	-	-	-	-	48.3
479.0	-	-	-	-	-	-	-	-	36.2
492.1	-	-	-	-	-	-	-	-	23.8

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
255.9 ft + 315.0 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
98.4	204.1*	211.4*	-	-	-	-	-	-	-
111.5	201.7*	209.9*	-	-	-	-	-	-	-
118.1	197.9*	211.4	-	-	-	-	-	-	-
124.7	187.4*	211.4	-	-	-	-	-	-	-
137.8	166.9*	209.2	-	-	-	-	-	205.0	-
150.9	149.3*	206.8	-	-	-	-	-	205.0	-
164.0	134.3*	203.9	-	-	-	-	-	205.0	-
177.2	121.0*	200.8	-	-	-	-	-	205.0	-
190.3	109.3*	197.1	-	-	-	-	-	203.9	-
203.4	99.0*	193.6	-	-	-	-	-	202.8	-
216.5	88.6*	189.8	195.6	-	-	-	-	201.7	-
229.7	78.3*	186.1	195.6	-	-	-	-	199.5	-
242.8	69.0*	182.5	195.6	-	-	-	-	195.1	-
255.9	60.6*	179.0	195.6	-	-	-	-	191.8	-
269.0	53.1*	175.5	194.4	-	-	-	-	188.5	-
282.2	46.5*	172.0	193.3	-	-	-	-	186.3	-
295.3	40.3*	168.4	191.4	-	-	-	-	183.0	-
308.4	34.8*	164.9	190.5	169.8	-	-	-	179.7	-
321.5	29.5*	161.7	189.2	169.1	-	-	-	177.5	-
334.6	18.1	131.6	185.8	169.1	-	-	-	174.2	-
347.8	-	-	180.3	169.1	-	-	-	160.9	-
360.9	-	-	167.1	165.6	-	-	-	148.8	-
374.0	-	-	152.1	157.2	-	-	-	136.7	-
387.1	-	-	-	149.5	121.0	-	-	125.7	-
400.3	-	-	-	142.2	114.0	-	-	113.5	-
413.4	-	-	-	135.6	107.4	-	-	100.8	-
426.5	-	-	-	-	101.2	-	-	88.2	-
439.6	-	-	-	-	95.2	-	-	76.3	-
452.8	-	-	-	-	89.9	63.9	-	64.6	-
465.9	-	-	-	-	-	60.6	-	58.0	-
479.0	-	-	-	-	-	56.4	-	48.9	-
492.1	-	-	-	-	-	52.5	-	38.4	-
518.4	-	-	-	-	-	-	-	17.0	-

255.9 ft + 354.3 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
111.5	152.3*	159.0*	-	-	-	-	-	-	-
124.7	151.7*	157.4*	-	-	-	-	-	-	-
131.2	149.8*	157.6	-	-	-	-	-	-	-
137.8	147.9*	157.4	-	-	-	-	-	-	-
150.9	138.2*	155.9	-	-	-	-	-	153.2	-
164.0	123.5*	153.9	-	-	-	-	-	153.2	-
177.2	110.9*	151.9	-	-	-	-	-	152.1	-
190.3	99.4*	149.7	-	-	-	-	-	152.1	-
203.4	89.5*	147.3	-	-	-	-	-	151.0	-
216.5	80.5*	144.6	-	-	-	-	-	148.8	-
229.7	72.5*	142.2	-	-	-	-	-	147.7	-
242.8	64.4*	139.6	140.7	-	-	-	-	145.5	-
255.9	56.0*	136.9	140.7	-	-	-	-	143.3	-
269.0	48.5*	134.0	140.7	-	-	-	-	140.0	-
282.2	41.9*	130.7	140.7	-	-	-	-	137.8	-
295.3	35.7*	127.0	140.4	-	-	-	-	135.6	-
308.4	30.0*	123.2	140.0	-	-	-	-	133.4	-
321.5	24.9*	119.5	139.6	-	-	-	-	131.2	-
334.6	20.1*	115.7	138.5	119.5	-	-	-	129.0	-
347.8	15.7*	112.0	137.6	119.5	-	-	-	126.8	-
360.9	11.7*	108.2	136.0	119.3	-	-	-	123.5	-
374.0	-	101.9	133.8	119.3	-	-	-	121.3	-
387.1	-	-	132.1	119.3	-	-	-	119.0	-
400.3	-	-	130.5	119.0	-	-	-	113.5	-
413.4	-	-	119.5	119.0	100.3	-	-	107.1	-
426.5	-	-	-	119.0	94.1	-	-	95.5	-
439.6	-	-	-	116.6	88.4	-	-	84.0	-
452.8	-	-	-	111.1	82.9	-	-	73.0	-
465.9	-	-	-	-	77.8	-	-	62.2	-
479.0	-	-	-	-	73.0	-	-	53.1	-
492.1	-	-	-	-	68.3	44.8	-	47.6	-
518.4	-	-	-	-	-	37.7	-	28.4	-
531.5	-	-	-	-	-	34.2	-	19.2	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
275.6 ft + 118.1 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft 1,000 lb									
55.8	531.3*	628.3*	-	-	-	-	-	-	-
59.1	504.9*	628.3*	-	-	-	-	-	-	-
65.6	463.0*	619.5*	-	-	-	-	-	-	-
72.2	425.5*	643.8	-	-	-	-	-	615.1	-
78.7	393.5*	634.9	-	-	-	-	-	615.1	-
85.3	366.0*	626.1	-	-	-	-	-	615.1	-
91.9	341.7*	612.9	-	-	-	-	-	615.1	-
98.4	319.7*	601.9	-	-	-	-	-	615.1	-
111.5	283.3*	575.4	-	-	-	-	-	610.7	-
124.7	248.0*	553.4	-	-	-	-	-	599.7	-
137.8	215.4*	529.1	632.7	-	-	-	-	590.8	-
144.4	187.0	504.9	610.7	-	-	-	-	576.5	-
150.9	-	-	582.0	-	-	-	-	562.2	-
164.0	-	-	526.9	-	-	-	-	502.7	-
177.2	-	-	482.8	-	-	-	-	451.9	-
190.3	-	-	443.1	-	-	-	-	407.9	-
203.4	-	-	-	377.0	-	-	-	370.4	-
216.5	-	-	-	351.6	-	-	-	335.1	-
229.7	-	-	-	327.4	-	-	-	306.4	-
242.8	-	-	-	-	-	-	-	280.0	-
255.9	-	-	-	-	259.0	-	-	255.7	-
269.0	-	-	-	-	243.6	-	-	233.7	-
282.2	-	-	-	-	231.5	-	-	213.8	-
295.3	-	-	-	-	-	-	-	189.6	-
308.4	-	-	-	-	-	-	-	166.4	-
321.5	-	-	-	-	-	-	-	143.3	-
334.6	-	-	-	-	-	-	-	126.8	-
347.8	-	-	-	-	-	-	-	111.3	-
360.9	-	-	-	-	-	-	-	90.6	-

275.6 ft + 157.5 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft 1,000 lb									
65.6	434.3*	504.9*	-	-	-	-	-	-	-
72.2	400.1*	500.4*	-	-	-	-	-	-	-
78.7	370.4*	513.7	-	-	-	-	-	-	-
85.3	343.9*	513.7	-	-	-	-	-	-	493.8
91.9	320.8*	509.3	-	-	-	-	-	-	493.8
98.4	300.9*	502.7	-	-	-	-	-	-	493.8
111.5	265.7*	487.2	-	-	-	-	-	-	493.8
124.7	238.1*	471.8	-	-	-	-	-	-	493.8
137.8	211.2*	454.2	-	-	-	-	-	-	487.2
150.9	185.2*	439.8	-	-	-	-	-	-	480.6
157.5	173.9*	432.1	507.1	-	-	-	-	-	470.7
164.0	163.6*	424.4	507.1	-	-	-	-	-	465.2
177.2	132.5	396.8	476.2	-	-	-	-	-	449.7
190.3	-	-	438.7	-	-	-	-	-	414.5
203.4	-	-	405.7	-	-	-	-	-	374.8
216.5	-	-	377.0	-	-	-	-	-	341.7
229.7	-	-	351.6	318.6	-	-	-	-	310.9
242.8	-	-	-	298.7	-	-	-	-	284.4
255.9	-	-	-	281.1	-	-	-	-	260.1
269.0	-	-	-	264.6	-	-	-	-	238.1
282.2	-	-	-	-	-	-	-	-	219.4
295.3	-	-	-	-	208.6	-	-	-	200.6
308.4	-	-	-	-	197.8	-	-	-	184.1
321.5	-	-	-	-	-	-	-	-	163.1
334.6	-	-	-	-	-	-	-	-	143.3
347.8	-	-	-	-	-	-	-	-	124.6
360.9	-	-	-	-	-	-	-	-	107.1
374.0	-	-	-	-	-	-	-	-	96.8
387.1	-	-	-	-	-	-	-	-	80.5
400.3	-	-	-	-	-	-	-	-	63.1

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
275.6 ft + 196.9 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
78.7	347.2*	405.7*	-	-	-	-	-	-	-
85.3	323.0*	402.3*	-	-	-	-	-	-	-
91.9	300.9*	413.4	-	-	-	-	-	-	-
98.4	282.2*	412.3	-	-	-	-	-	-	-
111.5	249.1*	405.7	-	-	-	-	-	-	396.8
124.7	222.7*	395.7	-	-	-	-	-	-	396.8
137.8	200.2*	385.8	-	-	-	-	-	-	396.8
150.9	181.0*	374.8	-	-	-	-	-	-	396.8
164.0	164.7*	363.8	-	-	-	-	-	-	390.2
177.2	146.8*	352.7	409.0	-	-	-	-	-	383.6
190.3	130.7*	342.8	403.4	-	-	-	-	-	372.6
203.4	116.8*	331.8	400.1	-	-	-	-	-	359.4
216.5	93.9	304.2	379.2	-	-	-	-	-	350.5
229.7	-	-	352.7	-	-	-	-	-	321.9
242.8	-	-	329.6	-	-	-	-	-	293.2
255.9	-	-	308.6	276.7	-	-	-	-	269.0
269.0	-	-	291.0	260.1	-	-	-	-	246.9
282.2	-	-	-	245.8	-	-	-	-	227.1
295.3	-	-	-	232.6	-	-	-	-	209.4
308.4	-	-	-	220.5	-	-	-	-	191.8
321.5	-	-	-	-	182.1	-	-	-	176.4
334.6	-	-	-	-	172.8	-	-	-	162.0
347.8	-	-	-	-	164.0	-	-	-	145.5
360.9	-	-	-	-	-	-	-	-	127.9
374.0	-	-	-	-	-	110.2	-	-	111.3
387.1	-	-	-	-	-	103.8	-	-	95.2
400.3	-	-	-	-	-	-	-	-	83.8
413.4	-	-	-	-	-	-	-	-	72.8
426.5	-	-	-	-	-	-	-	-	57.5
439.6	-	-	-	-	-	-	-	-	42.1

275.6 ft + 236.2 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
85.3	300.9*	325.2*	-	-	-	-	-	-	-
91.9	280.0*	324.1*	-	-	-	-	-	-	-
98.4	262.4*	320.8*	-	-	-	-	-	-	-
105.0	246.9*	330.7	-	-	-	-	-	-	-
111.5	231.5*	328.5	-	-	-	-	-	-	317.5
124.7	205.9*	324.1	-	-	-	-	-	-	317.5
137.8	184.3*	318.6	-	-	-	-	-	-	317.5
150.9	166.2*	312.0	-	-	-	-	-	-	317.5
164.0	150.4*	305.3	-	-	-	-	-	-	317.5
177.2	136.7*	297.6	-	-	-	-	-	-	317.5
190.3	121.3*	291.0	324.1	-	-	-	-	-	313.1
203.4	108.0*	283.3	320.8	-	-	-	-	-	306.4
216.5	96.3*	276.7	320.8	-	-	-	-	-	295.4
229.7	86.0*	269.0	315.3	-	-	-	-	-	288.8
242.8	76.7*	255.7	313.1	-	-	-	-	-	282.2
255.9	59.1	222.7	297.6	-	-	-	-	-	271.2
269.0	-	-	280.0	250.2	-	-	-	-	249.1
282.2	-	-	263.5	235.9	-	-	-	-	229.3
295.3	-	-	249.1	222.7	-	-	-	-	210.5
308.4	-	-	226.0	211.0	-	-	-	-	194.0
321.5	-	-	-	200.0	-	-	-	-	178.6
334.6	-	-	-	189.6	-	-	-	-	163.1
347.8	-	-	-	179.9	151.9	-	-	-	149.9
360.9	-	-	-	-	143.3	-	-	-	136.7
374.0	-	-	-	-	135.1	-	-	-	121.3
387.1	-	-	-	-	127.9	-	-	-	106.5
400.3	-	-	-	-	-	-	-	-	91.9
413.4	-	-	-	-	-	-	80.5	-	78.0
426.5	-	-	-	-	-	-	75.6	-	68.8
439.6	-	-	-	-	-	-	-	-	58.9
452.8	-	-	-	-	-	-	-	-	45.9
465.9	-	-	-	-	-	-	-	-	32.8

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%													
275.6 ft + 275.6 ft							275.6 ft + 315.0 ft						
SWSL SFSL													
0 lb 176,400 lb – 992,100 lb													
87°/85° 87°/85° 75° 65° 55° 45°													
ft 1,000 lb													
91.9	248.0 *	257.9 *	-	-	-	-	105.0	188.5 *	196.0 *	-	-	-	-
98.4	242.5 *	256.8 *	-	-	-	-	111.5	188.5 *	194.4 *	-	-	-	-
111.5	217.6 *	259.0	-	-	-	-	124.7	179.9 *	195.3	-	-	-	-
124.7	193.1 *	257.9	-	-	-	-	137.8	160.1 *	193.6	-	-	-	189.6
137.8	172.4 *	254.6	-	-	-	-	150.9	143.3 *	191.4	-	-	-	189.6
150.9	154.8 *	251.3	-	-	-	-	164.0	128.5 *	188.7	-	-	-	189.6
164.0	139.6 *	248.0	-	-	-	-	177.2	116.0 *	185.8	-	-	-	189.6
177.2	126.3 *	243.6	-	-	-	-	190.3	104.5 *	182.3	-	-	-	188.5
190.3	114.6 *	239.2	-	-	-	-	203.4	94.6 *	178.6	-	-	-	187.4
203.4	103.6 *	234.8	248.0	-	-	-	216.5	85.5 *	175.0	-	-	-	186.3
216.5	91.9 *	230.4	248.0	-	-	-	229.7	76.5 *	171.5	180.1	-	-	185.2
229.7	81.6 *	226.0	246.9	-	-	-	242.8	67.5 *	167.8	180.1	-	-	180.8
242.8	72.3 *	220.5	244.7	-	-	-	255.9	59.3 *	164.2	180.1	-	-	175.3
255.9	64.2 *	216.1	244.7	-	-	-	269.0	51.8 *	160.7	179.9	-	-	173.1
269.0	56.9 *	211.2	244.7	-	-	-	282.2	45.2 *	157.0	178.1	-	-	169.8
282.2	50.0 *	198.6	242.5	-	-	-	295.3	39.0 *	153.4	177.0	-	-	167.6
295.3	35.7	173.3	241.4	215.6	-	-	308.4	33.5 *	149.7	174.8	-	-	164.2
308.4	-	-	231.5	203.7	-	-	321.5	28.4 *	146.2	173.5	155.9	-	162.0
321.5	-	-	219.4	192.7	-	-	334.6	16.1	135.1	171.5	155.0	-	158.7
334.6	-	-	203.0	182.5	-	-	347.8	-	-	169.3	155.0	-	155.4
347.8	-	-	178.1	173.3	-	-	360.9	-	-	166.0	155.0	-	142.2
360.9	-	-	-	164.7	-	-	374.0	-	-	160.1	149.5	-	130.1
374.0	-	-	-	156.5	127.6	-	387.1	-	-	-	142.0	-	119.0
387.1	-	-	-	149.3	120.2	-	400.3	-	-	-	134.9	105.6	109.6
400.3	-	-	-	-	113.3	-	413.4	-	-	-	128.5	99.4	97.9
413.4	-	-	-	-	106.9	-	426.5	-	-	-	122.4	93.5	85.8
426.5	-	-	-	-	101.0	-	439.6	-	-	-	-	87.7	74.3
439.6	-	-	-	-	-	65.5	452.8	-	-	-	-	82.7	63.1
452.8	-	-	-	-	-	62.2	465.9	-	-	-	-	77.6	53.4
465.9	-	-	-	-	-	59.1	479.0	-	-	-	-	-	48.1
479.0	-	-	-	-	-	-	492.1	-	-	-	-	-	44.3
492.1	-	-	-	-	-	-	505.3	-	-	-	-	-	40.8
505.3	-	-	-	-	-	-	518.4	-	-	-	-	-	17.4

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
275.6 ft + 354.3 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
111.5	143.5*	149.9*	-	-	-	-	-	-	-
124.7	143.1*	148.4*	-	-	-	-	-	-	-
131.2	141.8*	148.8	-	-	-	-	-	-	-
137.8	140.4*	148.8	-	-	-	-	-	-	-
150.9	132.1*	147.3	-	-	-	-	-	144.4	-
164.0	117.9*	145.5	-	-	-	-	-	144.4	-
177.2	105.6*	143.7	-	-	-	-	-	144.4	-
190.3	94.8*	141.5	-	-	-	-	-	143.3	-
203.4	85.1*	139.1	-	-	-	-	-	143.3	-
216.5	76.5*	136.7	-	-	-	-	-	141.1	-
229.7	68.6*	134.3	-	-	-	-	-	140.0	-
242.8	61.5*	131.8	133.2	-	-	-	-	138.9	-
255.9	54.7*	129.4	133.2	-	-	-	-	136.7	-
269.0	47.2*	126.8	133.2	-	-	-	-	133.4	-
282.2	40.6*	124.1	133.2	-	-	-	-	131.2	-
295.3	34.4*	121.0	133.2	-	-	-	-	129.0	-
308.4	28.9*	118.2	132.9	-	-	-	-	126.8	-
321.5	23.8*	115.1	132.7	-	-	-	-	124.6	-
334.6	19.0*	112.2	131.4	112.7	-	-	-	122.4	-
347.8	14.8*	109.1	131.0	112.2	-	-	-	120.2	-
360.9	-	106.3	130.5	112.2	-	-	-	117.9	-
374.0	-	103.2	129.0	112.2	-	-	-	115.7	-
387.1	-	-	128.3	112.2	-	-	-	113.5	-
400.3	-	-	127.4	111.8	-	-	-	110.2	-
413.4	-	-	125.9	111.8	-	-	-	101.4	-
426.5	-	-	-	111.8	86.2	-	-	92.2	-
439.6	-	-	-	110.0	80.7	-	-	81.1	-
452.8	-	-	-	104.7	75.4	-	-	70.3	-
465.9	-	-	-	99.6	70.5	-	-	59.7	-
479.0	-	-	-	-	65.9	-	-	49.8	-
492.1	-	-	-	-	61.5	-	-	42.1	-
505.3	-	-	-	-	57.3	33.1	-	34.6	-
518.4	-	-	-	-	-	29.8	-	26.7	-
531.5	-	-	-	-	-	26.5	-	17.9	-
544.6	-	-	-	-	-	23.6	-	-	-

295.3 ft + 118.1 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
55.8	509.3*	573.2*	-	-	-	-	-	-	-
59.1	485.0*	573.2*	-	-	-	-	-	-	-
65.6	445.3*	564.4*	-	-	-	-	-	-	-
72.2	410.1*	582.0	-	-	-	-	-	560.0	-
78.7	379.2*	577.6	-	-	-	-	-	560.0	-
85.3	352.7*	568.8	-	-	-	-	-	560.0	-
91.9	329.6*	560.0	-	-	-	-	-	560.0	-
98.4	309.7*	549.0	-	-	-	-	-	560.0	-
111.5	274.5*	526.9	-	-	-	-	-	560.0	-
124.7	244.7*	507.1	-	-	-	-	-	553.4	-
137.8	212.5*	491.6	-	-	-	-	-	546.7	-
144.4	182.5	482.8	568.8	-	-	-	-	532.4	-
150.9	-	-	566.6	-	-	-	-	524.7	-
164.0	-	-	520.3	-	-	-	-	496.0	-
177.2	-	-	476.2	-	-	-	-	445.3	-
190.3	-	-	437.6	-	-	-	-	401.2	-
203.4	-	-	-	-	-	-	-	361.6	-
216.5	-	-	-	339.5	-	-	-	328.5	-
229.7	-	-	-	317.5	-	-	-	297.6	-
242.8	-	-	-	297.6	-	-	-	271.2	-
255.9	-	-	-	-	-	-	-	246.9	-
269.0	-	-	-	-	230.4	-	-	227.1	-
282.2	-	-	-	-	218.5	-	-	207.2	-
295.3	-	-	-	-	-	-	-	189.6	-
308.4	-	-	-	-	-	-	-	167.6	-
321.5	-	-	-	-	-	-	-	145.5	-
334.6	-	-	-	-	-	-	-	124.6	-
347.8	-	-	-	-	-	-	-	107.6	-
360.9	-	-	-	-	-	-	-	96.1	-
374.0	-	-	-	-	-	-	-	77.6	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
295.3 ft + 157.5 ft					295.3 ft + 196.9 ft				
SWSL					SWSL				
0 lb					0 lb				
176,400 lb – 992,100 lb					176,400 lb – 992,100 lb				
ft	87°/85°	87°/85°	75°	65°	55°	45°	ft	87°/85°	87°/85°
1,000 lb					1,000 lb				
65.6	416.7*	460.8*	-	-	-	-	78.7	334.0*	372.6*
72.2	384.7*	458.6*	-	-	-	-	85.3	310.9*	369.3*
78.7	356.0*	454.2*	-	-	-	-	91.9	289.9*	378.1
85.3	331.8*	469.6	-	-	-	449.7	98.4	272.3*	378.1
91.9	309.7*	465.2	-	-	-	449.7	111.5	240.3*	371.5
98.4	289.9*	458.6	-	-	-	449.7	124.7	215.0*	362.7
111.5	256.8*	447.5	-	-	-	449.7	137.8	193.3*	352.7
124.7	229.3*	432.1	-	-	-	449.7	150.9	174.8*	342.8
137.8	207.7*	416.7	-	-	-	449.7	164.0	159.2*	331.8
150.9	182.5*	403.4	-	-	-	445.3	177.2	144.6*	323.0
157.5	171.3*	396.8	463.0	-	-	436.5	190.3	128.8*	314.2
164.0	161.2*	391.3	463.0	-	-	434.3	203.4	115.1*	305.3
177.2	142.9*	378.1	451.9	-	-	416.7	216.5	91.1	296.5
190.3	-	-	432.1	-	-	403.4	229.7	-	-
203.4	-	-	399.0	-	-	368.2	242.8	-	-
216.5	-	-	370.4	-	-	335.1	255.9	-	-
229.7	-	-	345.0	306.4	-	304.2	269.0	-	-
242.8	-	-	-	287.7	-	277.8	282.2	-	-
255.9	-	-	-	270.1	-	253.5	295.3	-	-
269.0	-	-	-	254.6	-	231.5	308.4	-	-
282.2	-	-	-	240.3	-	211.6	321.5	-	-
295.3	-	-	-	-	196.0	194.0	334.6	-	-
308.4	-	-	-	-	185.8	177.5	347.8	-	-
321.5	-	-	-	-	176.4	162.0	360.9	-	-
334.6	-	-	-	-	-	143.3	374.0	-	-
347.8	-	-	-	-	-	124.6	387.1	-	-
360.9	-	-	-	-	-	107.6	400.3	-	-
374.0	-	-	-	-	-	90.8	413.4	-	-
387.1	-	-	-	-	-	80.2	426.5	-	-
400.3	-	-	-	-	-	67.2	439.6	-	-
413.4	-	-	-	-	-	51.4	452.8	-	-
								162.0	155.4
								153.9	142.2
								146.2	126.8
								-	110.2
								-	94.1
								-	88.6
								-	70.3
								-	59.7
								-	45.9
								-	31.7

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0 – 176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
295.3 ft + 236.2 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft 1,000 lb									
85.3	282.2*	298.7*	-	-	-	-	-	-	-
91.9	270.1*	297.6*	-	-	-	-	-	-	-
98.4	252.4*	295.4*	-	-	-	-	-	-	-
105.0	237.5*	303.1	-	-	-	-	-	-	-
111.5	222.7*	302.0	-	-	-	-	-	291.0	-
124.7	198.4*	298.7	-	-	-	-	-	291.0	-
137.8	177.7*	293.2	-	-	-	-	-	291.0	-
150.9	159.8*	286.6	-	-	-	-	-	291.0	-
164.0	144.6*	280.0	-	-	-	-	-	291.0	-
177.2	131.4*	272.3	-	-	-	-	-	291.0	-
190.3	119.5*	265.7	296.5	-	-	-	-	291.0	-
203.4	106.3*	259.0	296.5	-	-	-	-	284.4	-
216.5	94.6*	252.4	293.2	-	-	-	-	275.6	-
229.7	84.4*	246.9	292.1	-	-	-	-	266.8	-
242.8	75.2*	240.3	285.5	-	-	-	-	262.4	-
255.9	56.7	227.1	282.2	-	-	-	-	255.7	-
269.0	-	-	274.5	-	-	-	-	242.5	-
282.2	-	-	259.0	226.0	-	-	-	222.7	-
295.3	-	-	244.7	213.8	-	-	-	205.0	-
308.4	-	-	231.5	202.2	-	-	-	187.4	-
321.5	-	-	-	191.4	-	-	-	172.0	-
334.6	-	-	-	181.4	-	-	-	157.6	-
347.8	-	-	-	172.4	-	-	-	144.4	-
360.9	-	-	-	164.2	134.0	-	-	131.2	-
374.0	-	-	-	-	126.3	-	-	119.0	-
387.1	-	-	-	-	119.3	-	-	104.5	-
400.3	-	-	-	-	112.7	-	-	90.8	-
413.4	-	-	-	-	-	-	-	77.4	-
426.5	-	-	-	-	-	-	67.2	64.4	-
439.6	-	-	-	-	-	-	63.9	57.5	-
452.8	-	-	-	-	-	-	-	46.3	-
465.9	-	-	-	-	-	-	-	34.4	-
479.0	-	-	-	-	-	-	-	22.5	-

295.3 ft + 275.6 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft 1,000 lb									
91.9	232.6*	239.2*	-	-	-	-	-	-	-
98.4	227.1*	239.2*	-	-	-	-	-	-	-
111.5	209.0*	241.4	-	-	-	-	-	-	-
124.7	185.4*	240.3	-	-	-	-	-	-	233.7
137.8	165.6*	238.1	-	-	-	-	-	-	233.7
150.9	148.8*	234.8	-	-	-	-	-	-	233.7
164.0	134.0*	231.5	-	-	-	-	-	-	233.7
177.2	121.3*	226.0	-	-	-	-	-	-	233.7
190.3	110.0*	221.6	-	-	-	-	-	-	233.7
203.4	99.9*	217.6	-	-	-	-	-	-	233.7
216.5	90.2*	212.7	232.6	-	-	-	-	-	233.7
229.7	80.0*	208.1	231.5	-	-	-	-	-	224.9
242.8	71.0*	203.5	231.5	-	-	-	-	-	219.4
255.9	62.8*	198.9	229.3	-	-	-	-	-	212.7
269.0	55.6*	194.2	228.2	-	-	-	-	-	208.3
282.2	48.7*	189.6	224.9	-	-	-	-	-	205.0
295.3	33.5	177.3	222.7	-	-	-	-	-	200.6
308.4	-	-	220.5	194.7	-	-	-	-	191.8
321.5	-	-	215.0	184.1	-	-	-	-	175.3
334.6	-	-	203.9	174.2	-	-	-	-	160.9
347.8	-	-	188.9	165.1	-	-	-	-	147.7
360.9	-	-	-	156.7	-	-	-	-	134.5
374.0	-	-	-	149.0	-	-	-	-	122.4
387.1	-	-	-	142.0	111.6	-	-	-	111.3
400.3	-	-	-	135.1	104.9	-	-	-	100.3
413.4	-	-	-	-	98.8	-	-	-	87.5
426.5	-	-	-	-	93.0	-	-	-	75.4
439.6	-	-	-	-	87.7	-	-	-	63.5
452.8	-	-	-	-	-	-	53.8	-	53.4
465.9	-	-	-	-	-	-	49.8	-	46.1
479.0	-	-	-	-	-	-	46.1	-	36.2
492.1	-	-	-	-	-	-	-	-	25.8
505.3	-	-	-	-	-	-	-	-	15.2

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
295.3 ft + 315.0 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
105.0	177.0*	183.4*	-	-	-	-	-	-	-
111.5	177.0*	182.8*	-	-	-	-	-	-	-
124.7	169.3*	183.2	-	-	-	-	-	-	-
137.8	153.4*	182.1	-	-	-	-	-	-	-
150.9	137.1*	180.1	-	-	-	-	-	-	177.5
164.0	123.0*	177.7	-	-	-	-	-	-	177.5
177.2	110.7*	174.8	-	-	-	-	-	-	177.5
190.3	99.9*	171.5	-	-	-	-	-	-	177.5
203.4	90.2*	168.2	-	-	-	-	-	-	176.4
216.5	81.6*	164.7	-	-	-	-	-	-	175.3
229.7	73.6*	161.4	170.0	-	-	-	-	-	175.3
242.8	65.9*	158.1	170.0	-	-	-	-	-	172.0
255.9	57.8*	154.5	170.0	-	-	-	-	-	167.6
269.0	50.5*	151.2	170.0	-	-	-	-	-	162.0
282.2	43.9*	147.9	168.4	-	-	-	-	-	159.8
295.3	37.9*	144.6	167.6	-	-	-	-	-	156.5
308.4	32.4*	141.3	166.7	-	-	-	-	-	154.3
321.5	27.3*	138.0	164.0	146.8	-	-	-	-	151.0
334.6	14.3	134.7	162.7	145.9	-	-	-	-	147.7
347.8	-	-	161.2	145.9	-	-	-	-	145.5
360.9	-	-	157.6	145.9	-	-	-	-	136.7
374.0	-	-	155.9	141.8	-	-	-	-	124.6
387.1	-	-	148.6	134.7	-	-	-	-	113.5
400.3	-	-	-	127.9	-	-	-	-	104.1
413.4	-	-	-	121.7	90.8	-	-	-	94.4
426.5	-	-	-	115.7	85.3	-	-	-	82.9
439.6	-	-	-	110.2	80.0	-	-	-	71.4
452.8	-	-	-	-	75.0	-	-	-	60.6
465.9	-	-	-	-	70.1	-	-	-	50.0
479.0	-	-	-	-	65.7	-	-	-	41.0
492.1	-	-	-	-	-	34.4	-	-	33.3
518.4	-	-	-	-	-	28.0	-	-	16.5

295.3 ft + 354.3 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft	1,000 lb								
111.5	134.5*	140.4*	-	-	-	-	-	-	-
124.7	134.3*	139.3*	-	-	-	-	-	-	-
131.2	132.8*	139.6	-	-	-	-	-	-	-
137.8	131.4*	139.6	-	-	-	-	-	-	-
150.9	125.9*	138.5	-	-	-	-	-	-	135.6
164.0	112.4*	136.9	-	-	-	-	-	-	135.6
177.2	100.5*	135.1	-	-	-	-	-	-	135.6
190.3	89.9*	133.2	-	-	-	-	-	-	134.5
203.4	80.7*	131.0	-	-	-	-	-	-	134.5
216.5	72.1*	128.5	-	-	-	-	-	-	133.4
229.7	64.6*	126.3	-	-	-	-	-	-	132.3
242.8	57.8*	123.9	125.4	-	-	-	-	-	131.2
255.9	51.6*	121.5	125.4	-	-	-	-	-	130.1
269.0	45.6*	119.3	125.4	-	-	-	-	-	126.8
282.2	39.2*	116.8	125.4	-	-	-	-	-	123.5
295.3	33.3*	114.6	125.4	-	-	-	-	-	121.3
308.4	27.8*	112.2	125.2	-	-	-	-	-	119.0
321.5	22.7*	109.8	125.2	-	-	-	-	-	116.8
334.6	17.9*	107.6	124.1	-	-	-	-	-	115.7
347.8	13.7*	105.2	124.1	105.6	-	-	-	-	113.5
360.9	-	103.0	123.7	105.6	-	-	-	-	111.3
374.0	-	100.5	122.6	105.6	-	-	-	-	110.2
387.1	-	-	121.0	105.6	-	-	-	-	108.5
400.3	-	-	120.4	104.9	-	-	-	-	105.8
413.4	-	-	119.7	104.9	-	-	-	-	95.9
426.5	-	-	116.6	104.9	-	-	-	-	86.9
439.6	-	-	-	103.4	72.5	-	-	-	77.4
452.8	-	-	-	98.3	67.7	-	-	-	67.0
465.9	-	-	-	93.5	62.8	-	-	-	56.9
479.0	-	-	-	-	58.4	-	-	-	47.0
492.1	-	-	-	-	54.2	-	-	-	37.7
518.4	-	-	-	-	46.5	20.1	-	-	21.6
531.5	-	-	-	-	-	17.2	-	-	14.8
544.6	-	-	-	-	-	14.6	-	-	-
557.7	-	-	-	-	-	11.9	-	-	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
315.0 ft + 118.1 ft									
		SWSL					SFSL		
		0 lb		176,400 lb – 992,100 lb					
		87°/85°	87°/85°	75°	65°	55°	45°		
ft		1,000 lb							
59.1	465.2 *	515.9 *	-	-	-	-	-	-	-
65.6	427.7 *	511.5 *	-	-	-	-	-	-	-
72.2	394.6 *	524.7	-	-	-	-	507.1	-	-
78.7	366.0 *	524.7	-	-	-	-	507.1	-	-
85.3	340.6 *	515.9	-	-	-	-	507.1	-	-
91.9	317.5 *	507.1	-	-	-	-	507.1	-	-
98.4	297.6 *	498.2	-	-	-	-	507.1	-	-
111.5	264.6 *	478.4	-	-	-	-	507.1	-	-
124.7	237.0 *	460.8	-	-	-	-	507.1	-	-
137.8	209.4 *	445.3	-	-	-	-	500.4	-	-
150.9	166.0	429.9	507.1	-	-	-	487.2	-	-
164.0	-	-	498.2	-	-	-	465.2	-	-
177.2	-	-	467.4	-	-	-	436.5	-	-
190.3	-	-	429.9	-	-	-	392.4	-	-
203.4	-	-	396.8	-	-	-	354.9	-	-
216.5	-	-	-	325.2	-	-	321.9	-	-
229.7	-	-	-	304.2	-	-	291.0	-	-
242.8	-	-	-	285.5	-	-	264.6	-	-
255.9	-	-	-	269.0	-	-	240.3	-	-
269.0	-	-	-	-	-	-	219.4	-	-
282.2	-	-	-	-	204.4	-	199.5	-	-
295.3	-	-	-	-	193.6	-	180.8	-	-
308.4	-	-	-	-	-	-	164.2	-	-
321.5	-	-	-	-	-	-	144.4	-	-
334.6	-	-	-	-	-	-	124.6	-	-
347.8	-	-	-	-	-	-	106.3	-	-
360.9	-	-	-	-	-	-	88.6	-	-
374.0	-	-	-	-	-	-	79.6	-	-
387.1	-	-	-	-	-	-	62.6	-	-

315.0 ft + 157.5 ft									
		SWSL					SFSL		
		0 lb		176,400 lb – 992,100 lb					
		87°/85°	87°/85°	75°	65°	55°	45°		
ft		1,000 lb							
65.6	393.5 *	418.9 *	-	-	-	-	-	-	-
72.2	369.3 *	418.9 *	-	-	-	-	-	-	-
78.7	342.8 *	413.4 *	-	-	-	-	-	-	-
85.3	318.6 *	425.5	-	-	-	-	410.1	-	-
91.9	297.6 *	423.3	-	-	-	-	410.1	-	-
98.4	278.9 *	418.9	-	-	-	-	410.1	-	-
111.5	248.0 *	406.8	-	-	-	-	410.1	-	-
124.7	221.6 *	392.4	-	-	-	-	410.1	-	-
137.8	200.2 *	379.2	-	-	-	-	410.1	-	-
150.9	179.5 *	366.0	-	-	-	-	403.4	-	-
164.0	158.3 *	354.9	416.7	-	-	-	399.0	-	-
177.2	140.2 *	342.8	413.4	-	-	-	388.0	-	-
190.3	-	-	401.2	-	-	-	372.6	-	-
203.4	-	-	391.3	-	-	-	361.6	-	-
216.5	-	-	363.8	-	-	-	328.5	-	-
229.7	-	-	338.4	-	-	-	297.6	-	-
242.8	-	-	316.4	275.6	-	-	271.2	-	-
255.9	-	-	-	257.9	-	-	246.9	-	-
269.0	-	-	-	243.6	-	-	224.9	-	-
282.2	-	-	-	229.3	-	-	205.0	-	-
295.3	-	-	-	218.0	-	-	186.3	-	-
308.4	-	-	-	-	172.6	-	169.8	-	-
321.5	-	-	-	-	163.6	-	154.3	-	-
334.6	-	-	-	-	155.6	-	138.9	-	-
347.8	-	-	-	-	-	-	122.4	-	-
360.9	-	-	-	-	-	-	105.6	-	-
374.0	-	-	-	-	-	-	89.7	-	-
387.1	-	-	-	-	-	-	74.5	-	-
400.3	-	-	-	-	-	-	66.8	-	-
413.4	-	-	-	-	-	-	52.5	-	-
426.5	-	-	-	-	-	-	38.1	-	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%											
315.0 ft + 196.9 ft						315.0 ft + 236.2 ft					
SWSL											
SFSL											
0 lb											
176,400 lb – 992,100 lb											
87°/85° 87°/85° 75° 65° 55° 45°											
ft											
1,000 lb											
78.7	315.3 *	340.6 *	-	-	-	-	-	-	-	-	-
85.3	298.7 *	337.3 *	-	-	-	-	-	-	-	-	-
91.9	278.9 *	334.0 *	-	-	-	-	-	-	-	-	-
98.4	261.2 *	345.0	-	-	-	-	-	-	-	-	-
111.5	231.5 *	338.4	-	-	-	-	-	-	-	-	-
124.7	207.0 *	330.7	-	-	-	-	-	-	-	-	-
137.8	186.1 *	320.8	-	-	-	-	-	-	-	-	-
150.9	168.2 *	312.0	-	-	-	-	-	-	-	-	-
164.0	153.0 *	302.0	-	-	-	-	-	-	-	-	-
177.2	139.8 *	293.2	-	-	-	-	-	-	-	-	-
190.3	126.5 *	284.4	336.2	-	-	-	-	-	-	-	-
203.4	112.9 *	276.7	331.8	-	-	-	-	-	-	-	-
216.5	87.7	267.9	326.3	-	-	-	-	-	-	-	-
229.7	-	-	316.4	-	-	-	-	-	-	-	-
242.8	-	-	309.7	-	-	-	-	-	-	-	-
255.9	-	-	297.6	-	-	-	-	-	-	-	-
269.0	-	-	280.0	239.2	-	-	-	-	-	-	-
282.2	-	-	-	224.9	-	-	-	-	-	-	-
295.3	-	-	-	213.4	-	-	-	-	-	-	-
308.4	-	-	-	201.9	-	-	-	-	-	-	-
321.5	-	-	-	191.6	-	-	-	-	-	-	-
334.6	-	-	-	-	149.9	-	-	-	-	-	-
347.8	-	-	-	-	142.2	-	-	-	-	-	-
360.9	-	-	-	-	135.1	-	-	-	-	-	-
374.0	-	-	-	-	127.9	-	-	-	-	-	-
387.1	-	-	-	-	-	-	-	-	-	-	-
400.3	-	-	-	-	-	-	-	-	-	-	-
413.4	-	-	-	-	-	-	-	-	-	-	-
426.5	-	-	-	-	-	-	-	-	-	-	-
439.6	-	-	-	-	-	-	-	-	-	-	-
452.8	-	-	-	-	-	-	-	-	-	-	-
465.9	-	-	-	-	-	-	-	-	-	-	-

85.3	261.2 *	274.5 *	-	-	-	-	-	-	-	-	-
91.9	253.5 *	272.3 *	-	-	-	-	-	-	-	-	-
98.4	242.5 *	270.1 *	-	-	-	-	-	-	-	-	-
105.0	228.2 *	276.7	-	-	-	-	-	-	-	-	-
111.5	213.8 *	275.6	-	-	-	-	-	-	-	-	266.8
124.7	190.3 *	272.3	-	-	-	-	-	-	-	-	266.8
137.8	170.4 *	266.8	-	-	-	-	-	-	-	-	266.8
150.9	153.4 *	261.2	-	-	-	-	-	-	-	-	266.8
164.0	138.7 *	253.5	-	-	-	-	-	-	-	-	266.8
177.2	125.9 *	246.9	-	-	-	-	-	-	-	-	266.8
190.3	114.6 *	240.3	-	-	-	-	-	-	-	-	266.8
203.4	104.3 *	233.7	266.8	-	-	-	-	-	-	-	262.4
216.5	92.8 *	228.2	266.8	-	-	-	-	-	-	-	255.7
229.7	82.7 *	221.6	263.5	-	-	-	-	-	-	-	244.7
242.8	73.6 *	215.8	260.1	-	-	-	-	-	-	-	238.1
255.9	54.0	209.9	254.6	-	-	-	-	-	-	-	231.5
269.0	-	-	248.0	-	-	-	-	-	-	-	227.1
282.2	-	-	243.6	-	-	-	-	-	-	-	217.2
295.3	-	-	239.2	203.5	-	-	-	-	-	-	198.4
308.4	-	-	226.0	192.2	-	-	-	-	-	-	181.9
321.5	-	-	-	181.9	-	-	-	-	-	-	165.3
334.6	-	-	-	172.4	-	-	-	-	-	-	151.0
347.8	-	-	-	163.6	-	-	-	-	-	-	137.8
360.9	-	-	-	155.6	-	-	-	-	-	-	124.6
374.0	-	-	-	-	116.0	-	-	-	-	-	113.5
387.1	-	-	-	-	109.1	-	-	-	-	-	100.5
400.3	-	-	-	-	102.7	-	-	-	-	-	87.3
413.4	-	-	-	-	96.8	-	-	-	-	-	74.3
426.5	-	-	-	-	-	-	-	-	-	-	61.9
439.6	-	-	-	-	-	-	-	-	-	54.0	52.0
452.8	-	-	-	-	-	-	-	-	50.0	-	43.0
465.9	-	-	-	-	-	-	-	-	-	-	32.8
479.0	-	-	-	-	-	-	-	-	-	-	21.8

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

374,800 – 551,200 lb + 0–176,400 lb 49.2–78.7 ft 31.50 ft 32.2 ft/s 360° 75%									
315.0 ft + 275.6 ft									
315.0 ft + 315.0 ft									
SWSL SFSL									
0 lb 176,400 lb – 992,100 lb									
87°/85° 87°/85° 75° 65° 55° 45°									
ft 1,000 lb									
98.4	213.0*	220.2*	-	-	-	-	-	-	-
111.5	200.2*	216.9*	-	-	-	-	-	-	-
118.1	188.9*	221.6	-	-	-	-	-	-	-
124.7	177.7*	221.6	-	-	-	-	-	213.8	-
137.8	158.5*	218.7	-	-	-	-	-	213.8	-
150.9	142.2*	215.4	-	-	-	-	-	213.8	-
164.0	128.3*	211.4	-	-	-	-	-	213.8	-
177.2	115.7*	207.0	-	-	-	-	-	213.8	-
190.3	104.9*	202.2	-	-	-	-	-	213.8	-
203.4	95.2*	197.5	-	-	-	-	-	213.8	-
216.5	86.6*	192.7	212.7	-	-	-	-	213.8	-
229.7	78.3*	188.3	212.7	-	-	-	-	211.6	-
242.8	69.2*	183.6	211.4	-	-	-	-	202.8	-
255.9	61.3*	179.2	211.0	-	-	-	-	197.3	-
269.0	54.0*	174.6	207.2	-	-	-	-	191.8	-
282.2	47.4*	170.2	205.3	-	-	-	-	188.5	-
295.3	31.3	165.6	203.3	-	-	-	-	184.1	-
308.4	-	-	197.5	182.3	-	-	-	180.8	-
321.5	-	-	194.2	174.4	-	-	-	169.8	-
334.6	-	-	190.9	164.9	-	-	-	154.3	-
347.8	-	-	187.6	156.3	-	-	-	141.1	-
360.9	-	-	-	148.2	-	-	-	127.9	-
374.0	-	-	-	140.7	-	-	-	116.8	-
387.1	-	-	-	133.8	-	-	-	105.8	-
400.3	-	-	-	127.4	94.8	-	-	95.5	-
413.4	-	-	-	-	89.1	-	-	83.3	-
426.5	-	-	-	-	83.6	-	-	71.4	-
439.6	-	-	-	-	78.5	-	-	60.0	-
452.8	-	-	-	-	73.6	-	-	48.9	-
465.9	-	-	-	-	-	37.9	-	39.0	-
479.0	-	-	-	-	-	34.6	-	30.9	-
492.1	-	-	-	-	-	31.5	-	23.1	-
505.3	-	-	-	-	-	-	-	13.4	-
105.0	165.1*	171.3*	-	-	-	-	-	-	-
111.5	165.1*	170.6*	-	-	-	-	-	-	-
124.7	159.4*	171.1	-	-	-	-	-	-	-
137.8	146.4*	170.2	-	-	-	-	-	165.3	-
150.9	130.7*	168.4	-	-	-	-	-	165.3	-
164.0	117.3*	166.2	-	-	-	-	-	165.3	-
177.2	105.4*	163.6	-	-	-	-	-	165.3	-
190.3	94.8*	160.5	-	-	-	-	-	165.3	-
203.4	85.3*	157.2	-	-	-	-	-	165.3	-
216.5	77.2*	154.1	-	-	-	-	-	164.2	-
229.7	69.4*	150.8	159.0	-	-	-	-	164.2	-
242.8	62.6*	147.5	159.0	-	-	-	-	163.1	-
255.9	56.2*	144.4	159.0	-	-	-	-	157.6	-
269.0	48.9*	141.3	159.0	-	-	-	-	153.2	-
282.2	42.5*	138.2	157.9	-	-	-	-	148.8	-
295.3	36.6*	135.1	157.0	-	-	-	-	145.5	-
308.4	31.1*	132.1	156.3	-	-	-	-	142.2	-
321.5	26.0*	128.8	154.3	-	-	-	-	140.0	-
334.6	12.1	125.7	152.6	135.6	-	-	-	136.7	-
347.8	-	-	150.8	135.6	-	-	-	133.4	-
360.9	-	-	149.0	135.6	-	-	-	131.2	-
374.0	-	-	145.1	133.4	-	-	-	119.0	-
387.1	-	-	143.3	126.5	-	-	-	108.2	-
400.3	-	-	-	120.2	-	-	-	97.9	-
413.4	-	-	-	114.0	-	-	-	88.2	-
426.5	-	-	-	108.2	75.6	-	-	78.0	-
439.6	-	-	-	103.0	70.5	-	-	67.0	-
452.8	-	-	-	-	65.9	-	-	56.4	-
465.9	-	-	-	-	61.5	-	-	46.3	-
479.0	-	-	-	-	57.1	-	-	36.4	-
492.1	-	-	-	-	53.1	-	-	26.9	-
505.3	-	-	-	-	-	20.1	-	19.2	-
518.4	-	-	-	-	-	17.2	-	12.1	-
531.5	-	-	-	-	-	14.6	-	-	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1

	0 lb	176,400 lb	352,800 lb	529,200 lb	705,600 lb	882,000 lb	992,100 lb
--	------	------------	------------	------------	------------	------------	------------

 374,800 – 551,200 lb +  0 – 176,400 lb  49.2 – 78.7 ft  31.50 ft  32.2 ft/s  360°  75%		 315.0 ft +  354.3 ft			
		SWSL		SFSL	
 0 lb		176,400 lb – 992,100 lb			
 87°/85°		87°/85°		75° 65° 55° 45°	
ft		1,000 lb			
111.5	125.2*	131.0*	-	-	-
124.7	125.2*	129.9*	-	-	-
137.8	124.1*	129.9	-	-	-
150.9	117.7*	129.2	-	-	125.7
164.0	106.5*	127.6	-	-	125.7
177.2	95.2*	125.9	-	-	125.7
190.3	84.9*	124.1	-	-	125.7
203.4	76.1*	122.1	-	-	125.7
216.5	67.7*	119.9	-	-	124.6
229.7	60.6*	117.7	-	-	123.5
242.8	53.8*	115.3	-	-	122.4
255.9	47.8*	113.1	117.1	-	121.3
269.0	42.3*	110.9	117.1	-	119.0
282.2	37.3*	108.7	117.1	-	115.7
295.3	32.0*	106.3	117.1	-	112.4
308.4	26.5*	104.1	116.8	-	111.3
321.5	21.4*	101.9	116.8	-	109.3
334.6	16.8*	99.6	116.0	-	107.6
347.8	12.6*	97.2	115.7	-	105.8
360.9	-	95.0	115.5	98.1	104.1
374.0	-	92.8	115.1	98.1	102.3
387.1	-	-	113.1	98.1	100.5
400.3	-	-	112.4	97.2	98.5
413.4	-	-	112.0	97.2	90.2
426.5	-	-	111.3	97.2	80.9
439.6	-	-	96.3	-	72.5
452.8	-	-	91.3	58.4	62.2
465.9	-	-	86.2	54.0	52.2
479.0	-	-	81.1	49.8	42.8
492.1	-	-	-	45.9	33.5
518.4	-	-	-	38.6	15.9
531.5	-	-	-	35.1	-

* Main boom angle 87°

Main boom angle 87°, 85°, 75°, 65°, 55° and 45°, capacities for intermediate boom positions are calculated by the crane control system IC-1



0 lb

176,400 lb


352,800 lb

529,200 lb

705,600 lb

882,000 lb

992,100 lb

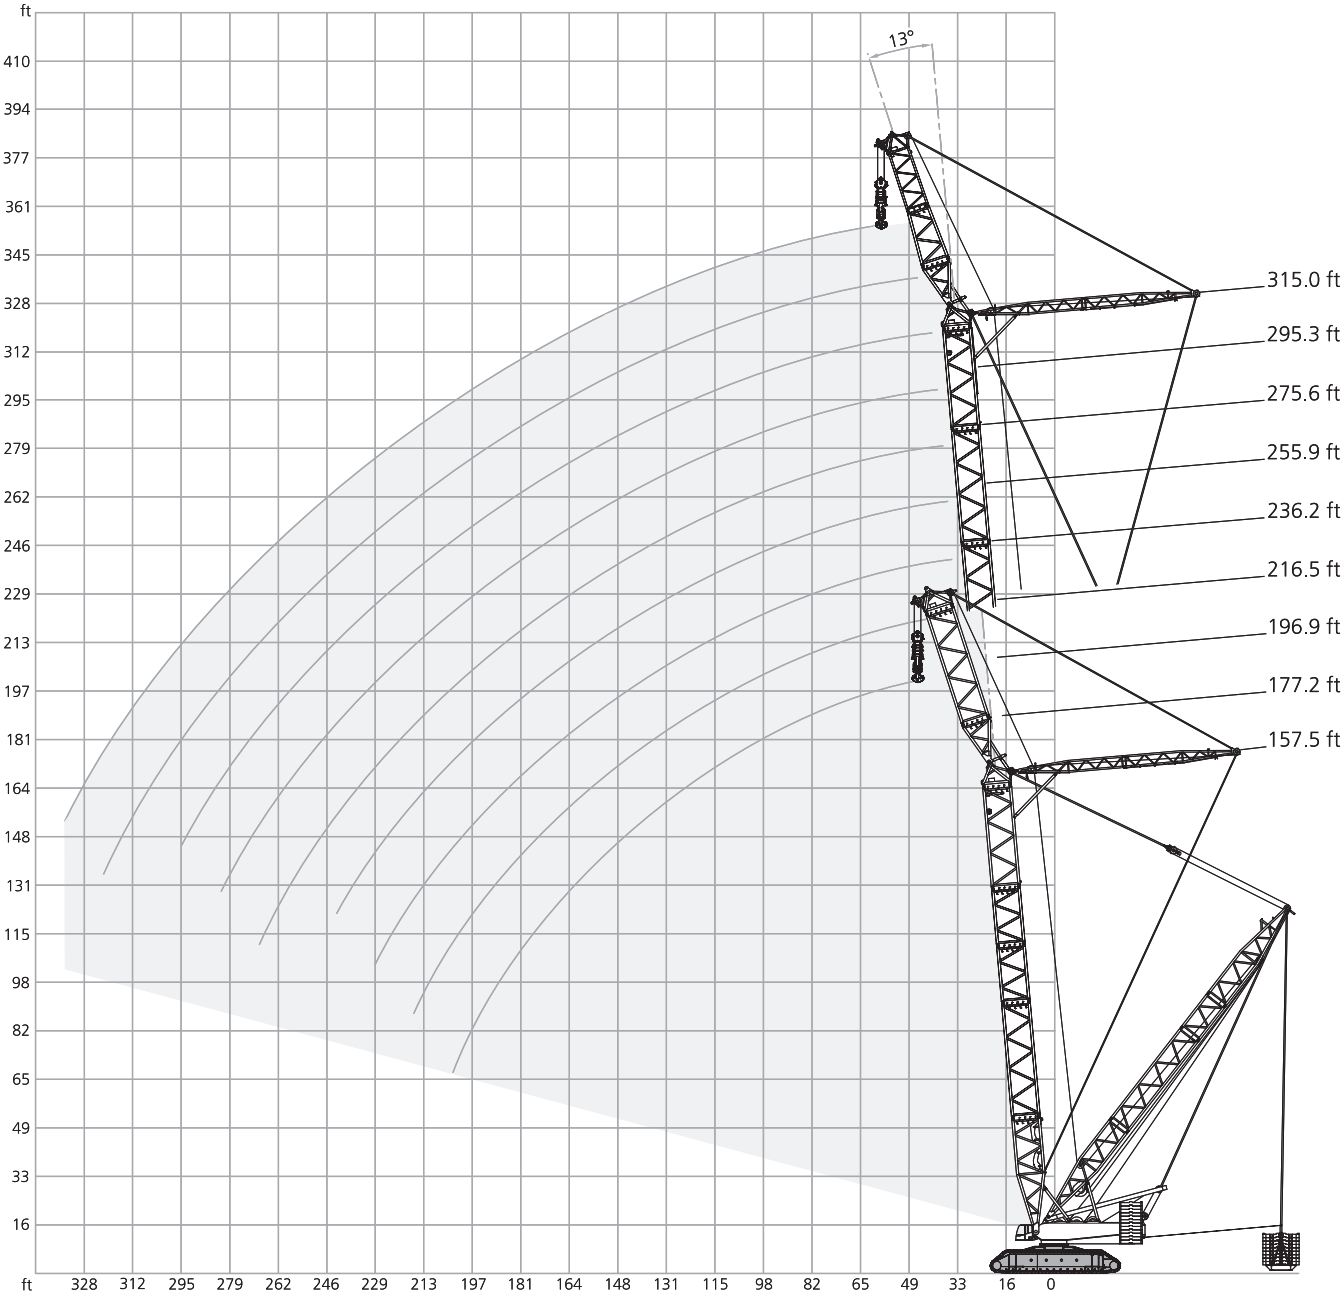

 374,800 - 551,200 lb +  0 - 176,400 lb  49.2-78.7 ft  59 ft  13°  31.5 ft  32.2 ft/s  360°  75%															
 157.5 ft		177.2 ft		196.9 ft		216.5 ft		236.2 ft		255.9 ft	275.6 ft	295.3 ft	315.0 ft		
LFVL		SFVL		LFVL		SFVL		LFVL		SFVL		LFVL		LFVL	
ft															ft
45.9	1115.5	-	-	-	-	-	-	-	-	-	-	-	-	-	45.9
49.2	1115.5	1657.9	1115.5	1496.9	1115.5	-	-	-	-	-	-	-	-	-	49.2
52.5	1115.5	1638.0	1115.5	1496.9	1115.5	1366.9	1115.5	1236.8	1115.5	-	-	-	-	-	52.5
55.8	1115.5	1600.6	1115.5	1479.3	1115.5	1349.2	1115.5	1236.8	1115.5	1111.1	1009.7	908.3	-	-	55.8
59.1	1115.5	1547.6	1115.5	1479.3	1115.5	1349.2	1115.5	1236.8	1115.5	1111.1	1009.7	908.3	817.9	-	59.1
62.3	1115.5	1496.9	1115.5	1457.3	1115.5	1329.4	1115.5	1217.0	1115.5	1111.1	1009.7	908.3	817.9	734.1	62.3
65.6	1115.5	1450.6	1115.5	1417.6	1115.5	1329.4	1115.5	1217.0	1115.5	1095.7	1009.7	908.3	817.9	734.1	65.6
72.2	1115.5	1342.6	1115.5	1333.8	1115.5	1311.8	1115.5	1197.1	1115.5	1091.3	1009.7	908.3	817.9	734.1	72.2
78.7	1115.5	1221.4	1115.5	1212.5	1115.5	1203.7	1115.5	1179.5	1091.3	1075.9	994.3	906.1	817.9	734.1	78.7
85.3	1104.5	1117.7	1111.1	1108.9	1104.5	1100.1	1115.5	1091.3	1073.7	1058.2	978.9	892.9	817.9	734.1	85.3
91.9	1058.2	1029.6	1049.4	1020.7	1042.8	1011.9	1036.2	1003.1	1027.4	994.3	967.8	879.6	804.7	734.1	91.9
98.4	978.9	952.4	972.2	943.6	963.4	932.6	956.8	925.9	950.2	914.9	870.8	793.7	723.1	687.8	98.4
111.5	853.2	824.5	844.4	815.7	835.6	804.7	828.9	798.1	822.3	787.1	813.5	806.9	784.8	716.5	111.5
124.7	751.8	723.1	743.0	714.3	734.1	705.5	727.5	696.7	718.7	685.6	712.1	703.3	696.7	687.8	124.7
137.8	650.4	619.5	661.4	632.7	652.6	621.7	646.0	615.1	637.1	604.1	630.5	621.7	615.1	606.3	137.8
150.9	557.8	529.1	593.0	564.4	584.2	555.6	577.6	546.7	568.8	535.7	562.2	553.4	544.5	537.9	150.9
164.0	485.0	465.2	518.1	487.2	526.9	498.2	520.3	489.4	511.5	478.4	504.9	496.0	487.2	480.6	164.0
177.2	427.7	401.2	449.7	418.9	476.2	443.1	469.6	440.9	463.0	429.9	454.2	445.3	438.7	429.9	177.2
190.3	363.8	339.5	392.4	372.6	414.5	383.6	425.5	396.8	418.9	390.2	412.3	403.4	396.8	388.0	190.3
203.4	321.9	297.6	348.3	321.9	361.6	330.7	377.0	346.1	381.4	352.7	374.8	368.2	359.4	350.5	203.4
216.5	-	-	295.4	271.2	321.9	299.8	330.7	299.8	343.9	310.9	343.9	335.1	326.3	317.5	216.5
229.7	-	-	-	-	280.0	253.5	291.0	269.0	302.0	269.0	310.9	306.4	297.6	288.8	229.7
242.8	-	-	-	-	-	-	260.1	233.7	262.4	235.9	275.6	280.0	273.4	264.6	242.8
255.9	-	-	-	-	-	-	-	-	238.1	212.7	240.3	246.9	249.1	242.5	255.9
269.0	-	-	-	-	-	-	-	-	206.1	178.6	215.0	217.2	220.5	220.5	269.0
282.2	-	-	-	-	-	-	-	-	-	-	190.7	190.7	194.0	195.1	282.2
295.3	-	-	-	-	-	-	-	-	-	-	-	172.0	167.6	169.8	295.3
308.4	-	-	-	-	-	-	-	-	-	-	-	-	153.2	146.6	308.4
321.5	-	-	-	-	-	-	-	-	-	-	-	-	130.1	131.2	321.5
334.6	-	-	-	-	-	-	-	-	-	-	-	-	-	112.4	334.6

 0 lb
 176,400 lb
 352,800 lb
 529,200 lb
 705,600 lb
 882,000 lb
 992,100 lb

Notes to Lifting Capacity

Ratings are in compliance with ISO 4305.

Lifting capacities do not exceed 75% of tipping load.

Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings. Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and operation manual both supplied with the crane.

In some instances the superlift counterweight does not lift off the ground with the indicated load.

Crawler Carrier

	3-section carrier comprising of carbody with folded outriggers for the transport and two crawlers. Hydraulic pin connections between crawlers and carbody provide for easy assembly and removal to minimise width and weight for transportation.
Center pot	Bending- and torsion-resistant welded structure fabricated from high-strength fine grain structural steel.
Crawler side frames	Bending-resistant welded structure fabricated from high-strength fine grain structural steel. Centralized lubrication included as standard.
Crawlers	15 track rollers with hardened rolling surfaces. Raised position for both drive sprockets and idler wheels, drive sprockets and idler wheels provide load bearing capacity for erection, adjustable track tension. Each crawler is infinitely variable controlled, both independently and in opposite direction.
Power train	The tracks are powered by two hydraulic motors each through closed planetary gear units running in oil bath, equipped with spring-applied hydraulically released holding brakes. The gear units are of extremely compact design to fit within the width of the crawlers. Each crawler is infinitely variable controlled, both independently and in opposite direction. Quadro-Drive as standard.
Central ballast	176,400 lb.

Superstructure

Counterweight	551,200 lb.
Frame	Bending- and torsion-resistant welded structure fabricated from high-strength fine grain structural steel.
Drive	Two redundant operating water-cooled 6-cylinder Mercedes-Benz diesel engine type OM 470 LA, 2 x 320 kW (429 HP) at 1700 1/min, torque 2100 Nm at 1300 1/min. The engine complies with emission standard EU Stage IV / EPA Tier 4f regulations. Fuel tank capacity: 396 gallons. Optional for non-regulated markets: Mercedes-Benz diesel engine type OM 460 LA, 2 x 315 kW (422 HP) at 1800 1/min, torque 2000 Nm at 1300 1/min. The engine complies with emission standard EU Stage III A / EPA Tier 3 regulations.
Rope drums	The standard superstructure equipment includes three rope drums – hoist 1, hoist 2 and boom hoist. The drums are powered by hydraulic motors through closed planetary gear units running in oil bath. All rope drums have spring-applied, hydraulically released multi-disk brakes and non-wearing hydraulic braking for load lowering. Rope ends H 1, 2, 3 and W 1, 2 equipped with quick-connect rope end fittings. Hoists H 1 and H 2 and A-frame with boom hoist are removable to minimise weight for transportation.
A-frame	Cylinders on superstructure to raise A-frame are included as standard.
Slew units	Powered by four hydraulic motors through closed, planetary gear unit running in oil bath. Spring-applied, hydraulically released holding brake and non-wearing hydraulic braking.
Control system	IC-1: Electronic proportional valve pilot control integrated in stored-program control system incl. diagnostics. Two colour monitors, load indicator operated via a touchscreen. Working speeds infinitely variable controlled by the lever position. Automatic power control for optimal utilisation of engine output. Standard working range limitation, ground pressure indicator as well as outrigger loading indicator.
Cabin	Comfortable cab with large windscreen and air-conditioning. Laminated glass all around, roof window, self-contained hot air heater, full instrumentation and crane controls. The cab can be tilted back for improved operator view of boom point. A camera system is installed to monitor the rope drums. For transportation, the cab swings in front of the superstructure to minimise width.
Electrical equipment	24 V system (2 batteries 12 V / 180 Ah).
Quick-connection	Hydraulic quick-disconnect fittings on carrier and superstructure facilitate removal to minimise weight for transportation as standard.

Optional equipment

Hydraulic cylinder A-frame	For self-assembly of crawlers.
Sideways outriggers	For erection of long boom systems.
Counterweight carrier	Total weight max. 992,100 lb, in combination with SL telescopic system.
PC outriggers	Outrigger base 45.9 ft x 45.9 ft. Alternatively to the crawlers.

Further options on request!

Boom configurations S and L

SH:	Main boom: foot section 39.4 ft, inserts 19.7 ft, 34.5 ft and 39.4 ft (type 3328), boom head 4.9 ft. Main boom lengths: 118.1-315.0 ft.
SH / LH: (SGL variable)	Main boom: foot sections 39.4 ft, inserts 19.7 ft, 34.5 ft and 39.4 ft (type 3328), tapered insert, extended by inserts 19.7 ft and 39.4 ft (type 2822), top section 24.6 ft. Main boom lengths: 157.5-354.3 ft.
LH:	Main boom: foot section 39.4 ft, insert 34.5 ft (type 3328), tapered insert, extended by inserts 19.7 ft and 39.4 ft (type 2822), top section 24.6 ft. Main boom lengths: 157.5-374.0 ft.
SW:	Main boom: same as SH. Offset 87° to 65°. Luffing fly jib: foot section 14.8 ft, insert 39.4 ft (type 3328), tapered insert, insert 19.7 ft and inserts 39.4 ft (type 2822), top section 24.6 ft. Main boom lengths: 137.8-196.9 ft. Fly jib lengths: 98.4-315.0 ft.
SSL:	Main boom: same as SH. Superlift equipment. Main boom lengths: 137.8-315.0 ft.
SSL / LSL: (SGL 310 ft)	Main boom: foot section 39.4 ft, inserts 19.7 ft, 34.5 ft and 39.4 ft (type 2822), tapered insert, extended by inserts 19.7 ft and 39.4 ft (type 2822), top section 24.6 ft. Superlift equipment. Main boom lengths: 334.6-492.1 ft.
SSL / LSL S1:	Main boom: same as SSL, extended by boom power-kit + jib top section. Main boom lengths: 216.5-511.8 ft.
SWSL / SFSL:	Main boom: same as SH. Offset 87° to 45°. Luffing fly jib: same as SW. Superlift equipment. Main boom lengths: 157.5-315.0 ft. Fly jib lengths: 98.4-354.3 ft.
SFVL:	Main boom: same as SH. Superlift equipment. Fixed jib: foot section 14.8 ft, insert 39.4 ft (type 3328), additional SFVL-head included. Main boom lengths: 157.5-236.2 ft. Fly jib length: 59.0 ft.
LFVL:	Main boom: same as SH. Superlift equipment. Fixed jib: foot section 14.8 ft, tapered insert, top section 24.6 ft. Main boom lengths: 157.5-315.0 ft. Fly jib length: 59.0 ft.
+LF:	In addition to main boom configuration SH, SSL, SH/LH, SSL/LSL, SSL/LSL S1. Fly jib lengths: 49.2 ft, 68.9 ft, 88.6 ft, 108.3 ft. Fly jib offset: 15°, 20°, 30°. Runner on LF max. 52,900 lb as standard.
Pinning of boom	Hydraulic assisted pinning of boom sections is standard.
Reeving winch	Mounted on superstructure.
Operator aids	Electronic load indicator, hoist limit switch for boom movements, hydraulic boom backstops, anemometer.

Optional equipment

Power-kit for main boom	Consisting of max. 3 additional boom sections (2 of main boom, 1 of jib); Standard main boom 315.0 ft required.
Standard Superlift equipment	Mast 132.9 ft (type 2322), counterweight tray for max. 992,100 lb. Superlift radii 49.2 ft, 59.0 ft, 68.9 ft, 78.7 ft.
Variable Superlift equipment	Mast 132.9 ft (type 2322), counterweight tray for max 992,100 lb. Superlift radius infinitely variable during operation 49.2 to 78.7 ft. Vertical cylinder and stabilising system for Superlift counterweight.
Superlift with counterweight carrier	Mast 132.9 ft (type 2322), counterweight carrier for max. 992,100 lb. Superlift radius infinitely variable during operation 59.0 to 78.7 ft.
Add on SL radius	78.7 ft – 98.4 ft (tray and carrier), only SSL, SSL/LSL and SSL/LSL S1.
Hoist H3	Additional rope drum on main boom (for LF or runner operation). Line pull same as H1, rope length 2297 ft.
Runner 101,400 lb	Approx. 6.6 ft for installation on boom head or top section.
Fall protection	Fall protection system for main boom, fly jib and superlift mast.
S3-boom-kit LF3	For wind power applications without Superlift, hook heights from 367.5 ft – 433.1 ft.

November 2019. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the corresponding Operator's Manual when using our equipment or to otherwise act responsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Demag makes no other warranty, express or implied. All rights reserved. Products and services listed may be trademarks, service marks or trade-names of Demag IP Holdings GmbH.

© Tadano Demag GmbH 2019. Demag is a trademark of Tadano Demag GmbH.



Tadano Demag GmbH

Europa Allee 2
66482 Zweibrücken
Germany
T +49 6332 830

www.demagmobilecranes.com



Tadano Ltd. (International Division)

4-12, Kamezawa 2-chome
Sumida-ku Tokyo 130-0014, Japan
E info@tadano.com T 81-3-3621-7750
www.tadano.com