


Gru a montaggio rapido
Self-erecting Crane • Grue à montage rapide
Schnellmontagekran • Grúa de montaje rapido

Mono-Trifase • Single-Three phase • Mono-Triphasé • Ein-Dreiphasig • Mono-Trifasica

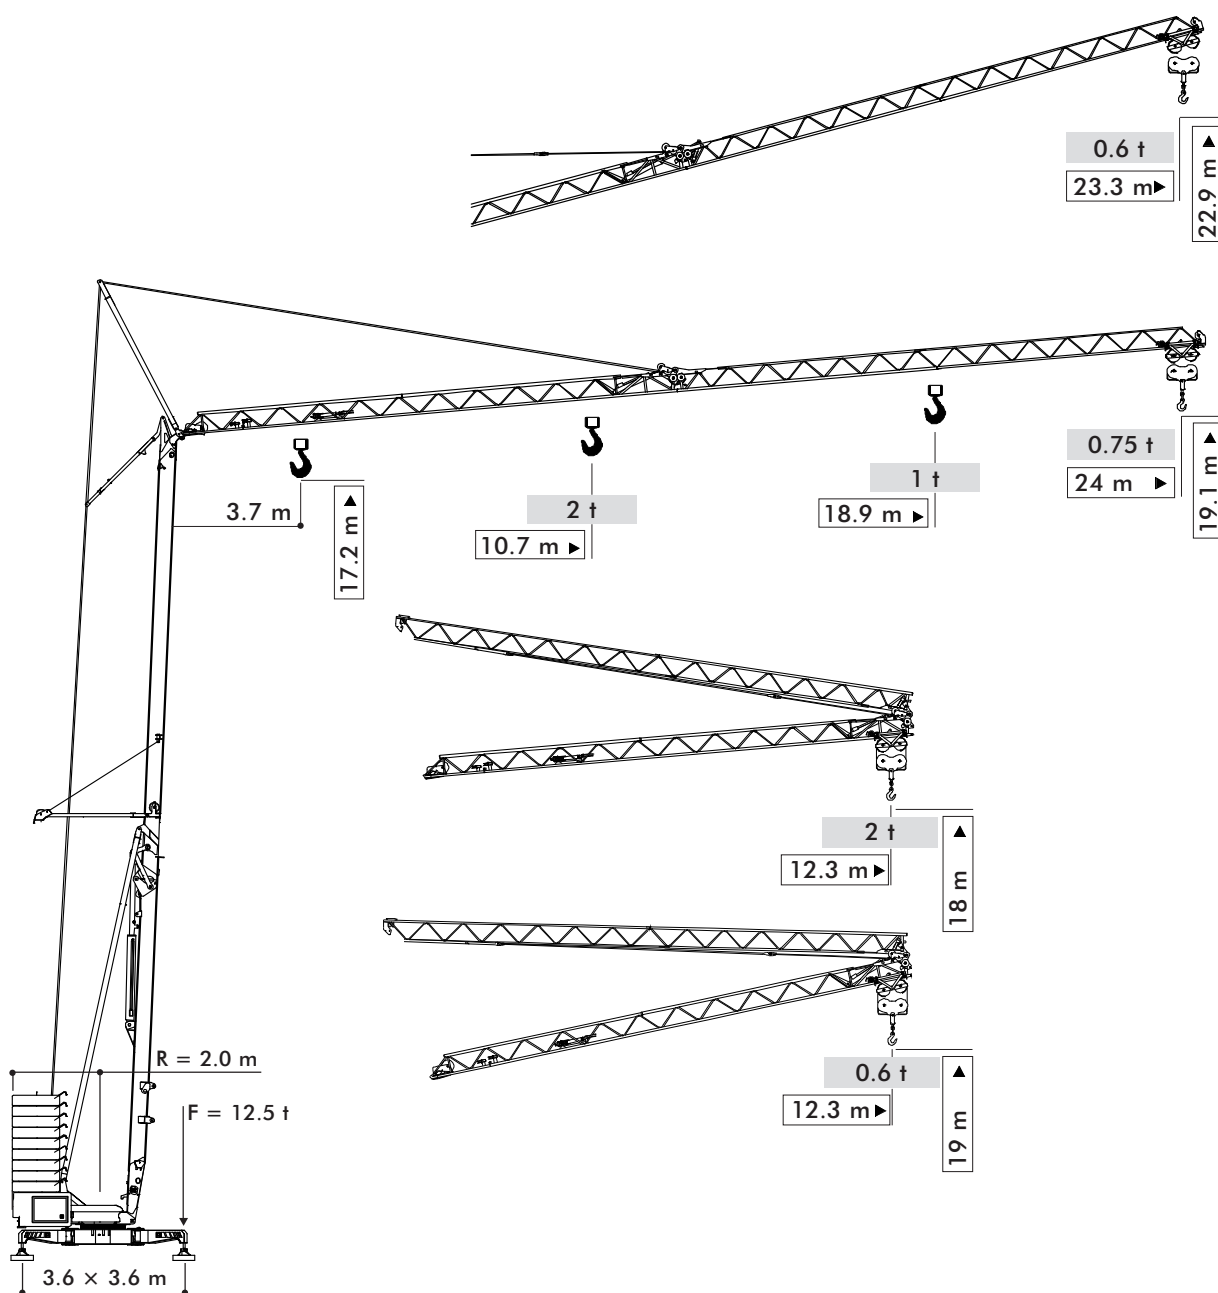

CBR 24 Plus

Diagramma di portata I **Load Diagram GB** **Courbes de charges F** **Lastkurven D** **Curvas de cargas E**

CBR 24 Plus												
2.0 t	10.70 m	3.7	6	8	10	12	14	16	18	20	22	24
2.0 t	-	2.00	2.00	2.00	2.00	1.75	1.44	1.22	1.06	0.94	0.85	0.75

- Braccio massimo
- Maximum jib
- Flèche étendu
- Ausladung
- Pluma extendida

CBR 24 Plus												
0.6 t	-	3.7	6	8	10	12	14	16	18	20	22	23.3
0.6 t	-	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60


- Braccio impennato
- Raised jib
- Flèche relevée
- Auslegersteilstellung
- Pluma inclinada

CBR 24 Plus												
2.0 t	-	3.7	6	8	10	12.3						
2.0 t	-	2.00	2.00	2.00	2.00	2.00						

- Braccio ripiegato
- Folded jib
- Flèche repliée
- Ausleger eingeklappt
- Pluma cerrada

CBR 24 Plus												
0.6 t	-	3.7	6	8	10	12.3						
0.6 t	-	0.60	0.60	0.60	0.60	0.60						

- Braccio ripiegato impennato
- Folded and raised jib
- Flèche repliée et relevée
- Ausleger eingeklappt in Steilstellung
- Pluma inclinada y cerrada

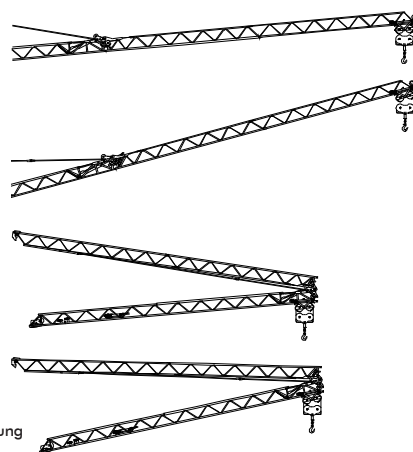

Meccanismi I **Mechanisms GB** **Mécanismes F** **Antriebe D** **Mecanismos E**

		3 kW - 230 V			6 kW - 230 V			10 kVA - 400 V			kW	
		m/min		kg	m/min		kg	m/min		kg		
		▲	▼		▲	▼		▲	▼			
Sollevamento Hoisting Heben Levage Elevación		4	4	2000	4	4	2000	4	4	2000	5,5	
		8	18	2000	16	18	2000	18	18	2000		
		16	36	750	28	36	750	36	36	750		
Distribuzione - Trolleying Katzfahren - Distribution Distribución			11 - 30		-	11 - 30		-	11 - 30		-	1,8
Rotazione - Slewing Schwenken - Orientation Orientación			0,2 ⇄ 0,9 tr/min-U/min-rpm									1,8
Montaggio - Erection - Montage - Montage - Montaje											1,8	
Zavorra di completamento - Completion ballast - Gegenballast beton - Lest d'appoint - Lastre de finalización										8460 kg		
Peso gru (Zavorra di base inclusa) - Crane weight (Base ballast included) - Kranengewicht (Inkl. Grundballast) - Poids de la grue (Lest de base incluse) - Peso della grua (Lastre de base incluida)										9300 kg		


- Movimenti controllati da inverter
- Motions controlled by frequency converter
- Frequenzumrichter gesteuerte Bewegungen
- Mouvements contrôlés par variateur
- Movimientos controlados por variadores

- Montaggio oleodinamico integrale
- Full hydraulic erection
- Vollhydraulische Montage
- Montage hydraulique intégral
- Montaje hidráulico integral

- Trasportabile con zavorra di montaggio
- Trailerable with erection ballast
- Verfahrbar mit Montage-Ballast
- Transportable avec lest de montage
- Transportable con lastre de montaje

- Braccio a ripiegamento oleodinamico
- Hydraulic jib unfolding
- Hydraulisch klappbar Ausleger
- Repliage hydraulique de la flèche
- Pluma con repliegue hidráulico

- Zincatura a caldo torre e braccio
- Galvanized tower and jib
- Ausleger und Turm feuerverzinkt
- Flèche et mât galvanisés
- Torre y pluma cincadas en caliente

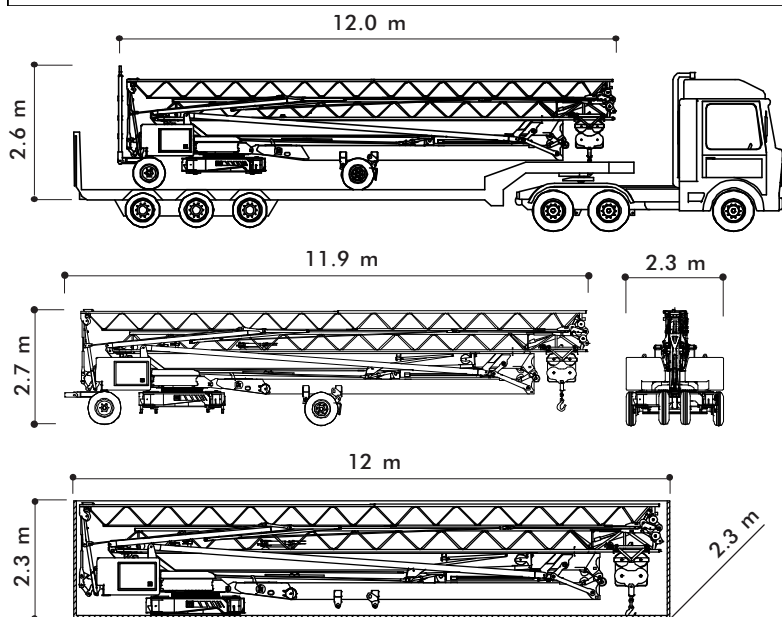

40 ft Open Top Container

	Sollevamento	I	Hoisting	GB	Levage	F	Heben	D	Elevación	E
	Traslazione carrello		Trolleying		Distribution		Katzfahren		Distribución	
	Rotazione		Slewing		Orientation		Schwenken		Orientación	