


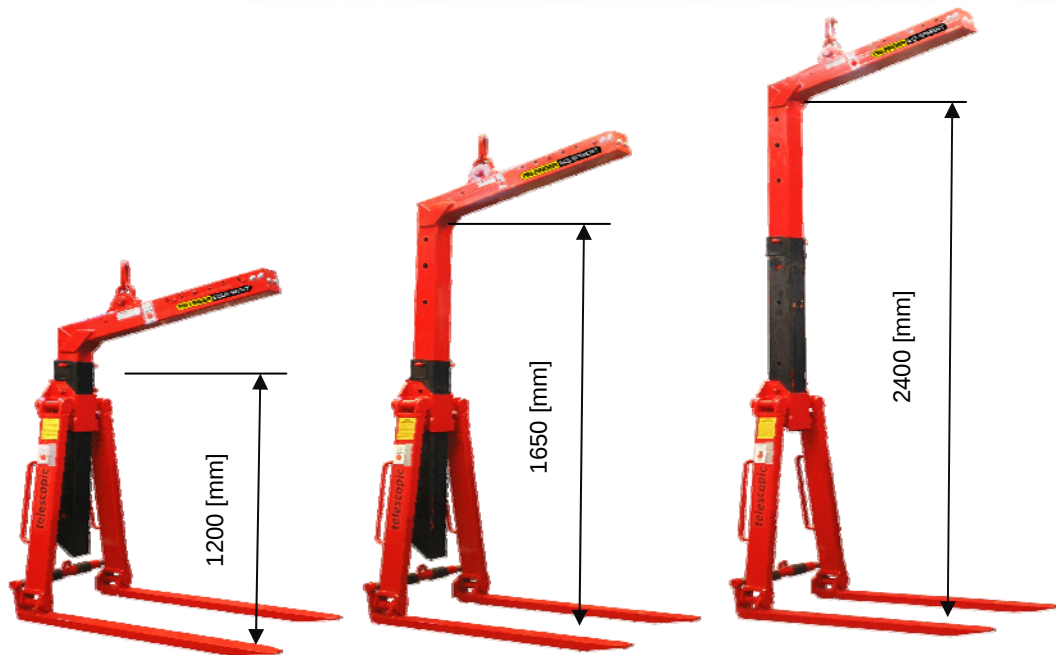

TELESCOPIC CRANE FORK

PZP-V-T / PZP-H-T/ PZPEX750

A stronger Ecological Awareness as well as continuously rising heating costs has increased the demand of insulating material for houses. Generally, these materials are lightweight and bulky, and these pallets are often loaded up to a height of 2000 mm.

With a conventional pallet fork these over height pallets cannot be handled.

The new PZP-T- Telescopic-Fork from PALFINGER made by Kinshofer is a stepwise adjustable crane fork up to an effective height of 2400mm.

Due to the integrated telescopic tube, the fork can be engaged completely for transport.

FEATURES AND BENEFITS

- Working time saved through fast and easy adjustment of the crane fork
- A instrument for all applications
- Safe and efficient operation due to optimized design
- High quality of PALFINGER made by Kinshofer products



TECNICAL DATAS

Pallet Fork self balancing and tines with continuous spindle adjustment

The efficient pallet fork with spring loaded centre of gravity compensation can easily be adapted to different loads with adjustable plunge depth and adjustable tine spread.

Type	Load capacity [kg]	Tine length [mm]	Throat height [mm]	Centre of gravity [mm]	Tine Spread [mm]
PZP150V-T	1500	980	1200 - 2400	500	475 – 815
PZP200V-T	2000	980	1200 – 2400	500	495 – 835
PZP250V-T	2500	980	1200 – 2400	500	490 – 830
PZP150VL-T	1500	1150	1200 – 2400	600	495 – 835
PZP200VL-T	2000	1150	1200 – 2400	600	500 – 840
PZP250VL-T	2500	1150	1200 – 2400	600	510 – 850

Pallet Forks Hydraulically Shifting and Tines with Continuous Spindle Adjustment

The efficient pallet fork with a hydraulically compensating centre of gravity can easily be adapted to different loads with adjustable plunge depth and adjustable tine spread.

Type	Load capacity [kg]	Tine length [mm]	Throat height [mm]	Centre of gravity [mm]	Tine Spread [mm]
PZP150H-T	1500	980	1200 - 2400	500	475 – 815
PZP200H-T	2000	980	1200 – 2400	500	495 – 835
PZP250H-T	2500	980	1200 – 2400	500	490 – 830
PZP150HL-T	1500	1150	1200 – 2400	600	495 – 835
PZP200HL-T	2000	1150	1200 – 2400	600	500 – 840
PZP250HL-T	2500	1150	1200 – 2400	600	510 – 850



PALFINGER Equipment Center

